

GLASTRON

1 9 9 5

PRODUCT
SPECIFICATION
MANUAL

BREAKING OUT OF THE PACK

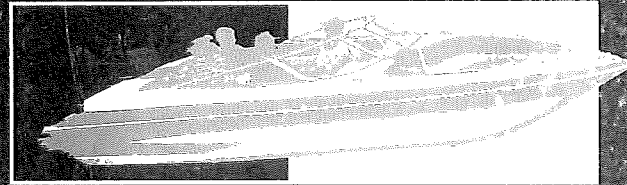


Table of Contents

	Page
Introduction	2-3
Features & Benefits.....	4-7
Glastron Limited Warranty.....	8-9
Definitions of Boat Measurements.....	10
1995 Glastron Model Line-Up	11
Specifications & Performance Data.....	12-49
Engine Information	50-55

GLASTRON. MORE BOAT FOR THE MONEY.

At Glastron, we've always been known for our leadership. This year, we're leading in a lot of new ways.

We've taken some groundbreaking steps to ensure that our best-looking Glastrons ever will continue to look good for years to come. First of all, we took out much of the wood, starting with the stringer system where wood has always been susceptible to deterioration from moisture. Our 17, 19 and 21-foot models feature a revolutionary new stringer system made entirely of foam-filled fiberglass. Where we use wood stringers, such as on our 23 and 24-foot models, they are fully fiberglass-encapsulated.

We also committed ourselves to newer, better materials for our seats, bow drawers, engine covers and other components where wood is often used. They're now formed out of a non-porous material that's virtually indestructible, using a process called rotocasting that's used throughout the auto industry. Once again, we saved weight, resulting in better performance and better fuel economy. Rotocasting also allowed us a level of quality control that was previously impossible. It gives the boat a more stylish look. And it allows us to pass some real cost savings on to our customers.

Backed By The Best Warranty

We're so sure our boats are built to last, we back them with a 5-year limited warranty on the hull and a 2-year limited warranty on all other components. That's one of the most generous warranties in the industry. And that's one more indication that Glastron gives you more boat for the money.

Everything You Expect A Boat To Do

The new Glastrons also perform exceptionally well. We know performance starts with the hull, so our new SSV₂ hull design performs even better than the legendary SSV (Super Stable V-hull).

Our hull designs have won Powerboat Magazine's top design awards nine different times. But the real proof is how they perform on the water, and over and over again when independent test drivers put them through their paces, Glastrons test out better. They never fail to deliver incredibly quick acceleration and planing times, impressive top speeds, superb handling in a variety of conditions, and exceptional fuel economy. Quite frankly, no boat is better at doing what a boat was meant to do.

The Choice Of Experienced Boaters

After three decades of leadership, Glastron continues to be the choice of knowledgeable boaters. Our buyers have one of the highest rates of satisfaction and one of the highest rates of repeat purchase in the boating industry.* What better endorsement could you ask for than that?

*Independent brand study conducted by
Irwin Broh & Associates, Inc.

GLASTRON

FEATURES AND BENEFITS

Before you sell a Glastron – make sure your customer knows these facts.

FACTS:

39 years in the marine industry

Purchasing Power – owned by Genmar, the largest independent boat builder

Performance by Design – winner of 9 awards in 12 years for top boat performance

- * One of the top three most recognized names in the industry
- * Largest percentage of repeat customers
- * Glastron owners use their boats on average more than owners of other brands
- * Glastron owners on average have boated longer than owners of other brands
- * Glastron owners consider boat handling and performance as the #1 reason to buy a Glastron
- * Glastron dealers have been in business longer on average than dealers of other brands – with better service and high resale
- * Glastron dealer reputation is considered higher than other brand dealers surveyed.

** From an independent marine market survey conducted by Irwin Broh and Associates, Inc.*

Before your customer makes a choice – shouldn't he compare these features and benefits?

FEATURES:

1. Solid foam core construction
2. Fiberglass stringer system
3. Stringer system is bonded to hull with fiberglass
4. Wood stringer system fully fiberglass encapsulated
5. Hull and deck joined with stainless steel screws, not pop rivets
6. Fiberglass molded bow liner bolted to floor
7. Keel areas are overlapped with fiberglass
8. Floor is resin-coated, top to bottom

BENEFITS:

Consistent overall strength without excessive weight for better performance

Strength, no wood to rot, foam filled. 4 times wider than ordinary wood stringers

Rigid stringer system for strength

Where wood has to be used, stringers are fully fiberglass encapsulated to avoid moisture deterioration

Better seal; much stronger boat overall

Eliminates wood rot problem; better appearance; stronger

Double strength in this all-important area

Protects against wood rot

FEATURES:


BENEFITS:

9. All exposed wood treated with wood life preservative
Longer life; eliminates wood rot
10. All deck fittings are backed by under-deck supports glassed into the deck
Strength; durability
11. Motor mounts are fiberglass encapsulated to the hull
Strength; reduces engine vibration
12. Aircraft locknuts on bolts
Strength; long term durability
13. Marine-grade carpet – one piece lock looped
Appearance; no seams
14. Marine-grade vinyl
UV protected; marine-grade stitching
15. Carpeted storage areas
Appearance; padding for boating gear
16. Carpeted ski locker with drain in sub-floor
Protects the ski; lets water drain away from the stringer system
17. Rotocast nylon seat bases
Eliminates wood; longer life
18. Bow storage drawers available on certain models
Roto-molded, one-piece construction for longer life
19. All models feature automotive-style instrument panel
Easy-to-read gauges, convenient controls, improved styling

FEATURES:

BENEFITS:

20. Built-in swim platform with stainless steel boarding ladder below platform
Ease of boarding; lower platform than most competition
21. Each new model is carefully designed for the proper weight to horsepower ratio
Complete design concentration on performance; better planing time; better fuel economy
22. Choice of MerCruiser or Volvo Penta Power
Better choices for each type of boat use
23. OMC Pre-Rig available on all outboards
Factory controls and gauges for complete package
24. Five-year hull warranty
Glastron backs its products

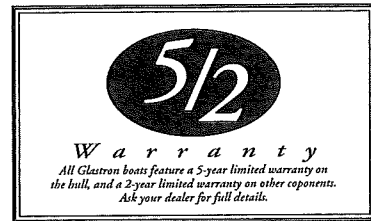

There are many more facts and features that have allowed Glastron to be recognized as an industry leader in innovation and safety. Make sure your customers know why Glastron is...

**MORE BOAT
FOR THE MONEY.**

GLASTRON LIMITED WARRANTY

Glastron Boats, a Division of Genmar Industries, Inc. ("Manufacturer"), warrants to the first retail purchaser (buyer) of the products it manufactures, under the name Glastron Boats, which are purchased from a factory authorized dealer, that should the hull be proven to be structurally defective in material or workmanship under normal operating conditions: Manufacturer will make the structural repairs (or, at its sole discretion, replace the affected part) necessitated thereby for a period of five (5) years from the date the product was purchased by the first retail purchaser. Manufacturer also warrants to the first retail purchaser to repair (or replace at its sole discretion) non-structural defects in material and workmanship under normal operating conditions subject to the exclusions set forth below for a period of two (2) years. This limited warranty is subject to the following terms and conditions.

If not demanded already, Manufacturer demands that the buyer examine the product to discover any defects in material or workmanship and notify Manufacturer or the selling dealer of same. During the warranty period, warranty repairs will be made without charge by the selling dealer, at the dealer's store or service facility or, at Manufacturer's election, by Manufacturer at its factory. Transportation to and from a Dealership or to Manufacturer's factory shall be at buyer's expense. Manufacturer's election to repair the defective product or replace the defective part is the exclusive remedy of the buyer and is a condition precedent to any legal or equitable action against Manufacturer. Any action for breach of warranty relating to a product must be brought within a period of sixty (60) days following Manufacturer's failure to repair the product or replace the defective part.

WHAT IS NOT COVERED:

This Warranty does not cover:

1. A product which has been repaired or altered without authorization of Manufacturer by persons other than Manufacturer or an authorized Dealer or altered in any way so as to affect its use and operation;
2. Engines, outdrives, controls, propellers, batteries or other equipment or accessories which are not manufactured by Manufacturer whether or not warranted by such other manufacturers;
3. Gelcoat finishes, cracking, crazing, blistering including osmotic blistering;
4. Windshield breakage;
5. Leakage around windshields, hatches or other apertures;
6. A product which has been subjected to unreasonable use, tampering, abuse, mishandling, improper maintenance, negligence, improper trailer, alteration, accident, or used for racing or commercial purposes, or which has been operated contrary to any printed instructions furnished by Manufacturer;

7. A product which has been overpowered according to the maximum recommended engine horsepower specified on the capacity plate affixed thereto;
8. Any representations relating to the speed of a product or weight;
9. Loss of time, inconvenience, travel expense, loss of use, haul out, launch, towing, storage charges or other matters not specifically covered hereunder;
10. Dealer preparation, cleaning and final adjustments and alignments in preparing boat for delivery or commissioning;
11. Any act of God.

This warranty gives you specific rights, and you may also have other rights which vary from state to state. This warranty is governed by the law of the State of Minnesota. This document contains the entire warranty given by Manufacturer and there are no terms, promises, conditions or warranties other than those contained herein. No oral or written information or advice given by Manufacturer, its dealers, representatives, agents or employees shall create a warranty or in any way increase the scope of this warranty. Manufacturer does not authorize any person to extend the time of this warranty or to create or assume for it any other obligation or liability with respect to its products. No person, including a dealer, is authorized to make any repairs or replacements under this warranty without the prior written approval of Manufacturer. Manufacturer reserves the right to improve its products through changes in design, material or parts without being obligated to incorporate such changes in products previously manufactured. This warranty is not transferable or assignable.

THIS EXPRESS WARRANTY IS IN LIEU OF, AND MANUFACTURER DISCLAIMS, ANY AND ALL OTHER WARRANTIES, EXPRESSED, IMPLIED OR STATUTORY, WHATSOEVER INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES UNDER THE UNIFORM COMMERCIAL CODE, ANY IMPLIED WARRANTY OF MERCHANTABILITY AND ANY IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. THIS WARRANTY SHALL BE THE SOLE AND EXCLUSIVE REMEDY OF ANY PERSON WHETHER IN CONTRACT, TORT OR OTHERWISE AND MANUFACTURER SHALL NOT BE LIABLE FOR CONSEQUENTIAL, SPECIAL OR INCIDENTAL DAMAGE, LOST PROFITS, INCONVENIENCE, OR DAMAGE RESULTING FROM A BREACH OF THE EXPRESSED OR ANY IMPLIED WARRANTY WHICH IS NOT DISCLAIMED HEREIN NOR ANY OTHER LOSS OR DAMAGE, EXCEPT AS SET FORTH ABOVE.

In the event that the disclaimer and exclusion of warranties and damages are inconsistent with applicable law, those disclaimers and exclusions are limited to the maximum permitted by applicable law, and all remaining implied obligations and warranties are limited in duration to a period of two (2) years or such shorter period as permitted by applicable law.

Some states do not allow limitations on implied warranties, or the exclusion or limitation of incidental or consequential damages, so the limitations or exclusions may not apply to you.

DEFINITIONS OF BOAT MEASUREMENTS

Length Overall (LOA) – Distance along the centerline from the tip of the bow to the aft-most part of the hull.

Maximum Beam – Maximum width of the boat.

Transom Width – Maximum width of the boat at transom.

Depth – Vertical distance from lowest point of the keel to the highest point of the boat, excluding windshields, lights and other removable components.

Transom – Vertical distance at boat's centerline from the keel/transom intersection to the transom top.

Maximum Depth – Vertical distance from lowest point of the keel to the highest point of boat, including windshields.

Cockpit Depth – Vertical distance from boat floor to top of gunwale as measured at the driver seat.

Length Overall on Trailer – Distance measured along the boat centerline, from forward-most point of trailer to aft-most point of motor/outdrive.

Boat Height on Trailer – Vertical distance from ground to highest point of boat, including windshield.

Draft (Drive unit up) – Total number of inches of boat and/or motor and drive unit below the waterline. Measured unloaded, with the motor/drive unit in the full up position.

Draft (Drive unit down) – Total number of inches of boat and/or motor and drive unit below the waterline. Measured unloaded, with the motor/drive unit in the full down position.

1995 GLASTRON MODEL LINE-UP GS 160

SPECIAL EDITIONS

SSV 170 SE

SSV 175 SE

SSV 195 SE

OUTBOARDS

SSV 170

SSV 190

STERNDRIVE RUNABOUTS

SSV 175

SSV 177

SSV 195

SSV 197

SSV 215

SSV 235

SKI & FISH

SSV 170 SKI & FISH

SSV 175 SKI & FISH

SSV 190 SKI & FISH

SSV 195 SKI & FISH

CUDDY CABINS

SSV 199

SSV 219

SPORT CRUISER

SSV 249

SPORT RUNABOUT

GS 195

MODEL DESIGNATOR CODE

0 – Outboard Model

5 – Open Bow Sterndrive Model

7 – Closed Bow Sterndrive Model

9 – Cuddy Cabin Sterndrive Model

SSV 170 SE

SPECIFICATIONS

LOA 17'1" (5.21 m.)	Transom Deadrise 21°
Beam 88" (2.24 m.)	LOA on Trailer 21'6" (6.55 m.)
Depth 43" (1.09 m.)	Fuel Capacity 20 gal. (75.7 L.)
Maximum Depth 59" (1.5 m.)	Maximum Load 1800 lbs. (817 kg.)
Cockpit Depth 28½" (.72 m.)	Max. Persons 8 or 1150 lbs. (522 kg.)
Approx. Wt. 1125 lbs. (511 kg.)	Maximum Horsepower 150
Transom Width 73¼" (1.86 m.)	NMMA Certified

Draft: A. Drive Unit Up 15½" (.39 m.)
 B. Drive Unit Down 28½" (.72 m.)

STANDARD FEATURES

Instrument panel includes: speedometer, tachometer, and fuel gauges; plus switches for bilge pump, navigation/anchor lights, panel lights, horn, and accessories	Stainless steel bow eye and stern eyes 6" cleats Walk-thru curved glass windshield Wraparound bow seats Bow storage drawers Anchor locker
Concealed electric horn Bilge pump Navigation lighting AM/FM stereo cassette with 2 speakers Glove box Ski locker	Passenger grab handle Adjustable bucket/bench seating Molded swim platform Stainless steel boarding ladder Soft top with concealed storage

OPTIONS

Canvas package: tonneau cover, walk-thru curtain, side curtains, stern curtain, soft top boot Mooring cover Cockpit and tonneau bow covers Dual cable steering Ski tow pylon	OMC Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom Full glass side wings
--	--

STANDARD COLOR

Laurel Teal/Beige

SSV 170 SE

PERFORMANCE DATA

ENGINE 90 EVINRUDE - PROP 13¼ x 17

RPM	MPH	GPH	RANGE*
2500	15	2.9	88
3400	25	4.2	102
4600	35	6.3	95
WOT	38-40	—	—

0-20 MPH Acceleration - 3.3 sec.

ENGINE 115 EVINRUDE - PROP 12¾ x 21

RPM	MPH	GPH	RANGE*
2500	15	3.6	71
3300	25	4.6	92
4700	35	7.2	83
WOT	42-44	—	—

0-20 MPH Acceleration - 3.2 sec.

ENGINE 135 MERCURY (V6) - PROP 13⅞ x 21 S/S LASER

RPM	MPH	GPH	RANGE*
2400	15	4.2	71
3000	25	5.1	87
4000	35	7.1	87
WOT	45-48	—	—

0-20 MPH Acceleration - 3.1 sec.

ENGINE 140 JOHNSON - PROP 14¼ x 21

RPM	MPH	GPH	RANGE*
2100	15	3.5	73
3300	25	4.4	97
4000	35	6.9	87
WOT	46-48	—	—

0-20 MPH Acceleration - 3.2 sec.

NOTE: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

***RANGE:** Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

SSV 175 SE

SPECIFICATIONS

LOA 17'1" (5.21 m.)
 Beam 88" (2.24 m.)
 Depth 43" (1.09 m.)
 Maximum Depth 59" (1.5 m.)
 Cockpit Depth 28½" (.72 m.)
 Approx. Wt. w/3.0 GS Volvo Penta
 1750 lbs. (794 kg.)

Draft: A. Drive Unit Up 16" (.41 m.)
 B. Drive Unit Down 31" (.79 m.)

Transom Width 73¼" (1.86 m.)
 Transom Deadrise 21°
 LOA on Trailer 21'6" (6.55 m.)
 Fuel Capacity 20 gal. (75.7 L.)
 Maximum Load 1250 lbs. (567 kg.)
 Max. Persons 8 or 1150 lbs. (522 kg.)
 NMMA Certified

STANDARD FEATURES

Instrument panel includes:
 speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter and
 engine temperature gauges; plus
 switches for bilge pump, blower,
 horn, lights, and accessories
 Concealed electric horn
 Bilge pump and blower
 Navigation lighting
 AM/FM stereo cassette
 with 2 speakers
 Glove box
 Ski locker
 Ski tow ring

Stainless steel bow eye
 and stern eyes
 6" cleats
 Walk-thru curved glass windshield
 Wraparound bow seats
 Bow storage drawers
 Anchor locker
 Passenger grab handle
 Fold-out sleeper seats
 with aft jump seats
 Molded swim platform
 Stainless steel boarding ladder
 Soft top with concealed storage

OPTIONS

Canvas package: tonneau cover,
 walk-thru curtain, side curtains,
 stern curtain, soft top boot
 Mooring cover

Cockpit and tonneau bow covers
 Full glass side wings
 High altitude prop
 Merc/Volvo prop

ENGINE OPTIONS

3.0LX MerCruiser (WOPS)

3.0 GS Volvo Penta (WOPS)

STANDARD COLOR

Laurel Teal/Beige

SSV 175 SE

PERFORMANCE DATA

ENGINE 3.0LX MERCUISER - PROP 13¼ x 21 AL

RPM	MPH	GPH	RANGE*
2100	15	2.5	102
2900	25	3.5	121
3500	35	7.4	80
WOT	42-45	—	—

0-20 MPH Acceleration - 3.4 sec.

ENGINE 3.0 GS VOLVO PENTA - PROP 15 x 17 AL

RPM	MPH	GPH	RANGE*
2000	10	2.1	81
3000	20	3.2	106
4000	35	7.6	78
WOT	41-43	—	—

0-20 MPH Acceleration - 3.7 sec.

NOTE: All testing done with two persons and full tank of fuel.
 Performance results will vary depending on load, altitude, and other
 conditions.

*RANGE: Mileage range at designated RPM and MPH as shown above starting with a
 full tank of gas.

SALE PRICE

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

SSV 195 SE

SPECIFICATIONS

LOA 18'7" (5.66 m.)	Transom Width 75" (1.9 m.)
Beam 90 3/4" (2.31 m.)	Transom Deadrise 21°
Depth 51" (1.19 m.)	LOA on Trailer 22' (6.71 m.)
Maximum Depth 63" (1.6 m.)	Fuel Capacity 35 gal. (132.5 L.)
Cockpit Depth 28 3/4" (.73 m.)	Maximum Load 1500 lbs. (681 kg.)
Approx. Wt. w/4.3 GL Volvo Penta 1990 lbs. (903 kg.)	Max. Persons 10 or 1410 lbs. (640 kg.)
	NMMA Certified
Draft: A. Drive Unit Up 16 1/2" (.42 m.)	
B. Drive Unit Down 31 1/2" (.8 m.)	

STANDARD FEATURES

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories	Stainless steel bow eye and stern eyes 6" cleats Walk-thru curved glass windshield Wraparound bow seats Bow storage drawers Anchor locker
Concealed electric horn Bilge pump and blower Navigation lighting AM/FM stereo cassette with 2 speakers	Passenger grab handle Fold-out sleeper seats with aft jump seats Molded swim platform Stainless steel boarding ladder Soft top with concealed storage
Glove box Ski locker Ski tow ring	

OPTIONS

Canvas package: tonneau cover, walk-thru curtain, side curtains, stern curtain, soft top boot Mooring cover	Cockpit and tonneau bow covers Full glass side wings High altitude prop Merc/volvo prop
--	--

ENGINE OPTIONS

3.0LX MerCruiser (WOPS)	3.0 GS Volvo Penta (WOPS)
4.3 MerCruiser	4.3 GL Volvo Penta

STANDARD COLOR

Laurel Teal/Beige

SSV 195 SE

PERFORMANCE DATA

ENGINE 4.3 MERCURISER - PROP 13 3/4 x 21 AL

RPM	MPH	GPH	RANGE*
2400	15	3.0	160
3200	25	4.0	202
3700	35	7.9	141
WOT	44-46	—	—

0-20 MPH Acceleration - 3.3 sec.

ENGINE 4.3 GL VOLVO PENTA - PROP 15 x 17 AL

RPM	MPH	GPH	RANGE*
2000	10	2.8	107
3000	25	3.6	208
4000	35	6.6	159
WOT	43-45	—	—

0-20 MPH Acceleration - 2.9 sec.

NOTE: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

***RANGE:** Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat	\$	_____
Motor _____ H.P.		_____
Trailer		_____
Accessories		_____
T, T & L		_____
TOTAL PRICE \$		_____

SSV 170

SPECIFICATIONS

LOA 17'1" (5.21 m.)	Transom Deadrise 21°
Beam 88" (2.24 m.)	LOA on Trailer 21'6" (6.55 m.)
Depth 43" (1.09 m.)	Fuel Capacity 20 gal. (75.7 L.)
Maximum Depth 59" (1.5 m.)	Maximum Load 1800 lbs. (817 kg.)
Cockpit Depth 28½" (.72 m.)	Max. Persons 8 or 1150 lbs. (522 kg.)
Approx. Wt. 1125 lbs. (511 kg.)	Maximum Horsepower 150
Transom Width 73¼" (1.86 m.)	NMMA Certified
Draft: A. Drive Unit Up 15½" (.39 m.)	
B. Drive Unit Down 28½" (.72 m.)	

STANDARD FEATURES

Instrument panel includes: speedometer, tachometer, and fuel gauges; plus switches for bilge pump, navigation/anchor lights, panel lights, horn, and accessories	Stainless steel bow eye and stern eyes
Concealed electric horn	6" cleats
Bilge pump	Walk-thru curved glass windshield
Navigation lighting	Wraparound bow seats
AM/FM stereo cassette with 2 speakers	Bow storage drawers
Glove box	Anchor locker
Ski locker	Passenger grab handle
Tilt steering	Adjustable bucket/bench seating
	Molded swim platform
	Stainless steel boarding ladder
	Soft top with concealed storage
	Gelcoat accent stripes

OPTIONS

Canvas package: tonneau cover, walk-thru curtain, side curtains, stern curtain, soft top boot	OMC Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom
Mooring cover	Convenience package: depth sounder, hour meter
Cockpit and tonneau bow covers	
Dual cable steering	
Full glass side wings	
Ski tow pylon	

COLOR OPTIONS

Delta Blue/Beige
Brandywine/Beige
Deep Teal/Beige

SSV 170

PERFORMANCE DATA

ENGINE 90 EVINRUDE - PROP 13¼ x 17

RPM	MPH	GPH	RANGE*
2500	15	2.9	88
3400	25	4.2	102
4600	35	6.3	95
WOT	38-40	—	—

0-20 MPH Acceleration - 3.3 sec.

ENGINE 115 EVINRUDE - PROP 12¾ x 21

RPM	MPH	GPH	RANGE*
2500	15	3.6	71
3300	25	4.6	92
4700	35	7.2	83
WOT	42-44	—	—

0-20 MPH Acceleration - 3.2 sec.

ENGINE 135 MERCURY (V6) - PROP 13⅞ x 21 S/S LASER

RPM	MPH	GPH	RANGE*
2400	15	4.2	71
3000	25	5.1	87
4000	35	7.1	87
WOT	45-48	—	—

0-20 MPH Acceleration - 3.1 sec.

ENGINE 140 JOHNSON - PROP 14¼ x 21

RPM	MPH	GPH	RANGE*
2100	15	3.5	73
3300	25	4.4	97
4000	35	6.9	87
WOT	46-48	—	—

0-20 MPH Acceleration - 3.2 sec.

NOTE: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat	\$	_____
Motor _____ H.P.		_____
Trailer		_____
Accessories		_____
T, T & L		_____
TOTAL PRICE \$		_____

SSV 190

SPECIFICATIONS

LOA 18'7" (5.66 m.)	Transom Deadrise 21°
Beam 90 3/4" (2.31 m.)	LOA on Trailer 22' (6.71 m.)
Depth 47" (1.19 m.)	Fuel Capacity 35 gal. (132.5 L.)
Maximum Depth 63" (1.6 m.)	Maximum Load 1900 lbs. (863 kg.)
Cockpit Depth 28 3/4" (.73 m.)	Max. Persons 8 or 1150 lbs. (522 kg.)
Approx. Wt. 1200 lbs. (545 kg.)	Maximum Horsepower 175
Transom Width 75" (1.9 m.)	NMMA Certified
Draft: A. Drive Unit Up 16" (.41 m.)	
B. Drive Unit Down 29" (.74 m.)	

STANDARD FEATURES

Instrument panel includes: speedometer, tachometer, and fuel gauges; plus switches for bilge pump, navigation/anchor lights, panel lights, horn, and accessories	Dual cable steering
Concealed electric horn	Stainless steel bow eye and stern eyes
Bilge pump	6" cleats
Navigation lighting	Walk-thru curved glass windshield
AM/FM stereo cassette with 2 speakers	Wraparound bow seats
Glove box	Bow storage drawers
Ski locker	Anchor locker
Tilt steering	Passenger grab handle
	Adjustable bucket/bench seating
	Molded swim platform
	Stainless steel boarding ladder
	Soft top with concealed storage
	Gelcoat accent stripes

OPTIONS

Canvas package: tonneau cover, walk-thru curtain, side curtains, stern curtain, soft top boot	OMC Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom
Mooring cover	Port and stbd. sleeper seats
Cockpit and tonneau bow covers	Stbd. bucket/port sleeper seat
Convenience package: depth sounder, hour meter	
Ski tow pylon	
Full glass side wings	

COLOR OPTIONS

Delta Blue/Beige
Brandywine/Beige
Deep Teal/Beige

SSV 190

PERFORMANCE DATA

ENGINE 90 EVINRUDE - PROP 13 1/4 x 17

RPM	MPH	GPH	RANGE*
2700	15	3.0	160
3500	25	4.4	182
4800	35	6.5	173
WOT	37-39	—	—

0-20 MPH Acceleration - 3.4 sec.

ENGINE 115 EVINRUDE - PROP 12 3/4 x 21

RPM	MPH	GPH	RANGE*
2600	15	3.7	131
3400	25	4.8	166
4700	35	7.2	157
WOT	42-44	—	—

0-20 MPH Acceleration - 3.3 sec.

ENGINE 135 MERCURY (V6) - PROP 13 7/8 x 21 S/S LASER

RPM	MPH	GPH	RANGE*
2500	15	4.4	109
3100	25	5.3	150
4200	35	7.5	147
WOT	46-49	—	—

0-20 MPH Acceleration - 3.2 sec.

ENGINE 150 JOHNSON - PROP 14 1/4 x 21

RPM	MPH	GPH	RANGE*
2400	15	4.5	106
3000	25	5.5	144
3900	35	7.8	141
WOT	46-49	—	—

0-20 MPH Acceleration - 3.1 sec.

NOTE: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

***RANGE:** Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

SSV 175

SPECIFICATIONS

LOA 17'1" (5.21 m.)	Transom Width 73¼" (1.86 m.)
Beam 88" (2.24 m.)	Transom Deadrise 21°
Depth 43" (1.09 m.)	LOA on Trailer 21'6" (6.55 m.)
Maximum Depth 59" (1.5 m.)	Fuel Capacity 20 gal. (75.7 L.)
Cockpit Depth 28½" (.72 m.)	Maximum Load 1250 lbs. (567 kg.)
Approx. Wt. w/3.0LX MerCruiser 1750 lbs. (794 kg.)	Max. Persons 8 or 1150 lbs. (522 kg.)
	NMMA Certified
Draft:	A. Drive Unit Up 16" (.41 m.)
	B. Drive Unit Down 31" (.79 m.)

STANDARD FEATURES

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories	Tilt steering 6" cleats Walk-thru curved full glass windshield
Concealed electric horn	Wraparound bow seats
Bilge pump and blower	Bow storage drawers
Navigation lighting	Anchor locker
AM/FM stereo cassette with 2 speakers	Passenger grab handle
Glove box	Adjustable fold-out sleeper seats with aft jump seats
Ski locker	Molded sleeper seat bases
Ski tow ring	Molded swim platform
Stainless steel bow eye and stern eyes	Stainless steel boarding ladder
	Soft top with concealed storage
	Gelcoat accent stripes
	Merc/Volvo controls

OPTIONS

Canvas package: tonneau cover, walk-thru curtain, side curtains, stern curtain, soft top boot	High altitude prop
Mooring cover	Merc/Volvo prop
Cockpit and tonneau bow covers	SL interior -- buckets, stern bench, sundeck
Convenience package: depth sounder, hour meter	Adjustable bucket/sleeper seating

ENGINE OPTIONS

3.0LX MerCruiser (WPS)	3.0 GS Volvo Penta (WPS)
4.3 MerCruiser	4.3 GL Volvo Penta

COLOR OPTIONS

Delta Blue/Beige
Brandywine/Beige
Deep Teal/Beige

SSV 175

PERFORMANCE DATA

ENGINE 3.0LX MERCUISER - PROP 13¾ x 21 AL

RPM	MPH	GPH	RANGE*
2100	15	2.5	102
2900	25	3.5	121
3500	35	7.4	80
WOT	42-45	—	—

0-20 MPH Acceleration - 3.4 sec.

ENGINE 4.3 MERCUISER - PROP 13¾ x 21 AL

RPM	MPH	GPH	RANGE*
2200	15	2.6	99
2900	25	3.8	112
3400	35	7.4	80
WOT	48-51	—	—

0-20 MPH Acceleration - 3.3 sec.

ENGINE 3.0 GS VOLVO PENTA - PROP 15 x 17 AL

RPM	MPH	GPH	RANGE*
2000	10	2.1	81
3000	20	3.2	106
4000	35	7.6	78
WOT	41-43	—	—

0-20 MPH Acceleration - 3.7 sec.

NOTE: All testing done with two persons and full tank of fuel.
Performance results will vary depending on load, altitude, and other
conditions.

*RANGE: Mileage range at designated RPM and MPH as shown above starting with a
full tank of gas.

SALE PRICE

Boat	\$	_____
Motor _____ H.P.		_____
Trailer		_____
Accessories		_____
T, T & L		_____
TOTAL PRICE	\$	_____

SSV 177

SPECIFICATIONS

LOA 17'1" (5.21 m.)	Transom Width 73 1/4" (1.86 m.)
Beam 88" (2.24 m.)	Transom Deadrise 21°
Depth 43" (1.09 m.)	LOA on Trailer 21'6" (6.55 m.)
Maximum Depth 59" (1.5 m.)	Fuel Capacity 20 gal. (75.7 L.)
Cockpit Depth 28 1/2" (.72 m.)	Maximum Load 1250 lbs. (567 kg.)
Approx. Wt. w/3.0LX MerCruiser 1750 lbs. (794 kg.)	Max. Persons 8 or 1150 lbs. (522 kg.)
Draft: A. Drive Unit Up 16" (.41 m.)	NMMA Certified
B. Drive Unit Down 31" (.79 m.)	

STANDARD FEATURES

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories	Stainless steel bow eye and stern eyes
Concealed electric horn	Tilt steering 6" cleats
Bilge pump and blower	Walk-thru curved full glass windshield
Navigation lighting	Bow access step
AM/FM stereo cassette with 2 speakers	Passenger grab handle
Glove box	Molded swim platform
Ski locker	Stainless steel boarding ladder
Ski tow ring	Soft top with concealed storage
	Gelcoat accent stripes
	Merc/Volvo controls
	SL interior: bucket seats, stern bench

OPTIONS

Canvas package: side curtains, stern curtain, soft top boot	High altitude prop
Mooring cover	Merc/Volvo prop
Cockpit cover	Stainless steel stern rail package
Convenience package: depth sounder, hour meter	Bow pad

ENGINE OPTIONS

3.0LX MerCruiser (WPS)	3.0 GS Volvo Penta (WPS)
4.3 MerCruiser	4.3 GL Volvo Penta

COLOR OPTIONS

Delta Blue/Beige
Brandywine/Beige
Deep Teal/Beige

SSV 177

PERFORMANCE DATA

ENGINE 3.0LX MERCUISER - PROP 13 3/4 x 21 AL

RPM	MPH	GPH	RANGE*
2100	15	2.5	102
2900	25	3.5	121
3500	35	7.4	80
WOT	42-43	—	—

0-20 MPH Acceleration - 3.4 sec.

ENGINE 4.3 MERCUISER - PROP 13 3/4 x 21 AL

RPM	MPH	GPH	RANGE*
2200	15	2.6	99
2900	25	3.8	112
3400	35	7.4	80
WOT	48-51	—	—

0-20 MPH Acceleration - 3.3 sec.

ENGINE 3.0 GS VOLVO PENTA - PROP 15 x 17 AL

RPM	MPH	GPH	RANGE*
2000	10	2.1	81
3000	20	3.2	106
4000	35	7.6	78
WOT	41-43	—	—

0-20 MPH Acceleration - 3.7 sec.

NOTE: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

***RANGE:** Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat	\$	_____
Motor _____ H.P.		_____
Trailer		_____
Accessories		_____
T, T & L		_____
TOTAL PRICE \$		_____

SSV 195

SPECIFICATIONS

LOA 18'7" (5.66 m.)	Transom Width 75" (1.9 m.)
Beam 90 3/4" (2.31 m.)	Transom Deadrise 21°
Depth 47" (1.19 m.)	LOA on Trailer 22' (6.71 m.)
Maximum Depth 63" (1.6 m.)	Fuel Capacity 35 gal. (132.5 L.)
Cockpit Depth 28 3/4" (.73 m.)	Maximum Load 1500 lbs. (681 kg.)
Approx. Wt. w/4.3LX MerCruiser 2000 lbs. (908 kg.)	Max. Persons 10 or 1410 lbs. (640 kg.)
	NMMA Certified
Draft: A. Drive Unit Up 16 1/2" (.42 m.)	
B. Drive Unit Down 31 1/2" (.8 m.)	

STANDARD FEATURES

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories	6" cleats Walk-thru curved full glass windshield Wraparound bow seats Bow storage drawers Anchor locker
Concealed electric horn Bilge pump and blower Navigation lighting AM/FM stereo cassette with 2 speakers	Passenger grab handle Adjustable fold-out sleeper seats with air jump seats Molded sleeper seat bases Molded swim platform
Glove box Ski locker Ski tow ring Stainless steel bow eye and stern eyes	Stainless steel boarding ladder Soft top with concealed storage Gelcoat accent stripes Merc/Volvo controls Tilt steering

OPTIONS

Canvas package: tonneau cover, walk-thru curtain, side curtains, stern curtain, soft top boot	High altitude prop Merc/Volvo prop Stainless steel prop (Merc only)
Mooring cover Cockpit and tonneau bow covers	SL interior - buckets, stern bench, sundeck
Convenience package: depth sounder, hour meter	Adjustable bucket/sleeper seating

ENGINE OPTIONS

4.3 MerCruiser	4.3 GL Volvo Penta
4.3LX MerCruiser	5.0 FL Volvo Penta
5.0LX MerCruiser	5.0 Fi Volvo Penta
5.7 MerCruiser	5.8 FL Volvo Penta

COLOR OPTIONS

Delta Blue/Beige
Brandywine/Beige
Deep Teal/Beige

SSV 195

PERFORMANCE DATA

ENGINE 4.3LX MERCUISER - PROP 13 3/4 x 21 AL

RPM	MPH	GPH	RANGE*
2400	15	3.0	160
3200	25	4.0	202
3700	35	7.9	141
WOT	47-49	—	—

0-20 MPH Acceleration - 3.3 sec.

ENGINE 5.0LX MERCUISER - PROP 13 3/4 x 21 AL

RPM	MPH	GPH	RANGE*
2200	15	3.3	144
2800	25	4.3	186
3500	35	8.0	141
WOT	53-57	—	—

0-20 MPH Acceleration - 3.1 sec.

ENGINE 4.3 GL VOLVO PENTA - PROP 15 x 17 AL

RPM	MPH	GPH	RANGE*
2000	15	2.8	161
3000	25	3.8	197
4000	35	6.9	152
WOT	42-45	—	—

0-20 MPH Acceleration - 3.2 sec.

NOTE: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

***RANGE:** Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat	\$	_____
Motor _____ H.P.		_____
Trailer		_____
Accessories		_____
T, T & L		_____
TOTAL PRICE	\$	_____

SSV 197

SPECIFICATIONS

LOA 18'7" (5.66 m.)	Transom Width 75" (1.9 m.)
Beam 90 ³ / ₄ " (2.31 m.)	Transom Deadrise 21°
Depth 47" (1.19 m.)	LOA on Trailer 22' (6.71 m.)
Maximum Depth 63" (1.6 m.)	Fuel Capacity 35 gal. (132.5 L.)
Cockpit Depth 28 ³ / ₄ " (.73 m.)	Maximum Load 1500 lbs. (681 kg.)
Approx. Wt. w/4.3LX MerCruiser 2000 lbs. (908 kg.)	Max. Persons 8 or 1150 lbs. (522 kg.)
	NMMA Certified
Draft: A. Drive Unit Up 16 ¹ / ₂ " (42 m.)	
B. Drive Unit Down 31 ¹ / ₂ " (8 m.)	

STANDARD FEATURES

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories	Tilt steering 6" cleats Walk-thru curved full glass windshield
Concealed electric horn	Bow access step
Bilge pump and blower	Anchor locker
Navigation lighting	Passenger grab handle
AM/FM stereo cassette with 2 speakers	Molded sleeper seat bases
Glove box	Molded swim platform
Ski locker	Stainless steel boarding ladder
Ski tow ring	Soft top with concealed storage
Stainless steel bow eye and stern eyes	Gelcoat accent stripes
	Merc/Volvo controls
	SL interior: buckets and stern bench

OPTIONS

Canvas package: side curtains, stern curtain, soft top boot	High altitude prop
Mooring cover	Merc/Volvo prop
Cockpit cover	Stainless steel prop (Merc only)
Convenience package: depth sounder, hour meter	Stainless steel stern rail package
	Bow pad

ENGINE OPTIONS

4.3 MerCruiser	4.3 GL Volvo Penta
4.3LX MerCruiser	5.0 FL Volvo Penta
5.0LX MerCruiser	5.0 Fi Volvo Penta
5.7 MerCruiser	5.8 FL Volvo Penta

COLOR OPTIONS

Delta Blue/Beige
Brandywine/Beige
Deep Teal/Beige

SSV 197

PERFORMANCE DATA

ENGINE 4.3LX MERCUISER - PROP 13³/₄ x 21 AL

RPM	MPH	GPH	RANGE*
2400	15	3.0	160
3200	25	4.0	202
3700	35	7.9	141
WOT	47-49	—	—

0-20 MPH Acceleration - 3.3 sec.

ENGINE 5.0LX MERCUISER - PROP 13³/₄ x 21 AL

RPM	MPH	GPH	RANGE*
2200	15	3.3	144
2800	25	4.3	186
3500	35	8.0	141
WOT	53-57	—	—

0-20 MPH Acceleration - 3.1 sec.

ENGINE 4.3 GL VOLVO PENTA - PROP 15 x 17 AL

RPM	MPH	GPH	RANGE*
2000	15	2.8	161
3000	25	3.8	197
4000	35	6.9	152
WOT	42-45	—	—

0-20 MPH Acceleration - 3.2 sec.

NOTE: All testing done with two persons and full tank of fuel.
Performance results will vary depending on load, altitude, and other conditions.

*RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat	\$	_____
Motor _____ H.P.		_____
Trailer		_____
Accessories		_____
T, T & L		_____
TOTAL PRICE \$		_____

SSV 215

SPECIFICATIONS

LOA 21'2" (6.45 m.)	Transom Width 92" (2.34 m.)
Beam 97" (2.45 m.)	Transom Deadrise 19°
Depth 51" (1.29 m.)	LOA on Trailer 24'8" (7.51 m.)
Maximum Depth 61" (1.54 m.)	Fuel Capacity 45 gal. (170.3 L.)
Cockpit Depth 31" (.77 m.)	Maximum Load 1600 lbs. (726 kg.)
Approx. Wt. w/5.7 MerCruiser	Max. Persons 11 or 1551 lbs. (704 kg.)
3050 lbs. (1384 kg.)	NMMA Certified
Draft:	A. Drive Unit Up 17½" (.44 m.)
	B. Drive Unit Down 32" (.81 m.)

STANDARD FEATURES

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, navigation/anchor lights, panel lights, interior lights, and horn	6" cleats Walk-thru curved full glass windshield Wraparound bow seats Bow storage drawers Anchor locker Passenger grab handle Adjustable fold-out sleeper seats with aft jump seats Molded sleeper seat bases Molded swim platform Stainless steel boarding ladder Soft top with concealed storage Gelcoat accent stripes Merc/Volvo controls Tilt steering
Concealed electric horn Bilge pump and blower Navigation lighting AM/FM stereo cassette with 2 speakers Lockable glove box Ski locker Ski tow ring Stainless steel bow eye and stern eyes	

OPTIONS

Canvas package: tonneau cover, walk-thru curtain, side curtains, stern curtain, soft top boot Mooring cover Cockpit and tonneau bow covers Convenience package: depth sounder, hour meter High altitude prop Merc/Volvo prop	Stainless steel prop (Merc only) SL Interior - buckets, stern bench, sundeck Adjustable bucket/sleeper seating Luxury interior package: U-shaped seating with added storage, four stereo speakers, wraparound bow rails, stern rail, cockpit table
--	---

ENGINE OPTIONS

5.0LX MerCruiser	5.0 FL Volvo Penta
5.7 MerCruiser	5.0 Fi Volvo Penta
5.7 EFI MerCruiser	5.8 FL Volvo Penta
5.7 MerCruiser Bravo III (SL seating only)	5.8 Fi Volvo Penta
7.4 MerCruiser (SL seating only)	5.0 Fi DP Volvo Penta
	5.8 FL DP Volvo Penta (SL seating only)

COLOR OPTIONS

Delta Blue/Beige
Brandywine/Beige
Deep Teal/Beige

SSV 215

PERFORMANCE DATA

ENGINE 5.7 MERCUISER - PROP 14 x 19 AL				RANGE*
RPM	MPH	GPH		
3000	28	8.9		163
3500	36	13.4		148
4000	47	17.4		133
WOT	50-54	—		—
0-20 MPH Acceleration - 3.7 sec.				

ENGINE 350 MERCUISER MAGNUM - PROP 19 QSS				RANGE*
RPM	MPH	GPH		
3000	29	8.9		163
3500	37	13.5		139
4000	47	17.6		139
WOT	51-55	—		—
0-20 MPH Acceleration - 3.6 sec.				

ENGINE 7.4 MERCUISER - PROP 23 MIRAGE				RANGE*
RPM	MPH	GPH		
3000	32	10.5		154
3500	38	14.2		139
4000	44	20.5		108
WOT	57-61	—		—
0-20 MPH Acceleration - 3.3 sec.				

ENGINE 5.0 FL VOLVO PENTA - PROP 14½ x 19 AL				RANGE*
RPM	MPH	GPH		
2000	20	7.2		106
3000	30	8.6		133
4000	40	15.7		97
WOT	48-50	—		—
0-20 MPH Acceleration - 3.3 sec.				

NOTE: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat	\$	_____
Motor _____ H.P.		_____
Trailer		_____
Accessories		_____
T, T & L		_____
TOTAL PRICE \$		_____

SSV 235

SPECIFICATIONS

LOA 23'3 1/2" (7.11 m.)
 Beam 102" (2.59 m.)
 Depth 64 1/2" (1.64 m.)
 Maximum Depth 77 1/2" (1.97 m.)
 Cockpit Depth 37" (.94 m.)
 Approx. Wt. w/5.7 MerCruiser
 3950 lbs. (1789 kg.)

Transom Width 98 1/2" (2.51 m.)
 Transom Deadrise 20°
 LOA on Trailer N/A
 Fuel Capacity 56 gal. (211.7 L.)
 Maximum Load 2240 lbs. (1015 kg.)
 Max. Persons 16
 NMMA Certified

Draft: A. Drive Unit Up 17" (.43 m.)
 B. Drive Unit Down 35" (.89 m.)

STANDARD FEATURES

Instrument panel includes:
 speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter and
 engine temperature gauges; plus
 switches for bilge pump, blower,
 navigation/anchor lights, panel
 lights, interior lights, and horn;
 hour meter and depth sounder

Concealed electric horn
 Bilge pump and blower
 AM/FM stereo with 2 speakers
 Lockable glove box
 Ski locker
 Ski tow ring
 Stainless steel bow eye
 and stern eyes
 6" cleats

Walk-thru curved full glass
 windshield
 Wraparound bow seats
 Full fiberglass cockpit liner
 Welded bow and stern rails
 Deluxe U-shaped cockpit seating with
 deluxe bucket seats
 Cockpit table
 Molded swim platform
 Stainless steel boarding ladder
 Soft top with concealed storage
 Gelcoat accent stripes
 Merc/Volvo controls
 Tilt steering
 Port side cuddy compartment with
 vented port window

OPTIONS

Canvas package: tonneau cover,
 walk-thru curtain, side curtains,
 aft curtain, soft top boot

Mooring cover
 Cockpit and tonneau bow covers
 High altitude prop

Merc/Volvo prop
 Stainless steel prop (Merc only)
 Merc/Volvo high altitude prop
 Porta-pottie
 Snap-in carpet

ENGINE OPTIONS

5.0LX MerCruiser
 5.7 MerCruiser
 5.7 EFI MerCruiser
 5.7 MerCruiser Bravo III
 7.4 MerCruiser

7.4 MerCruiser Bravo III
 5.8 FL Volvo Penta
 5.8 FI Volvo Penta
 5.8 FL DP Volvo Penta
 7.4 GL DP Volvo Penta

COLOR OPTIONS

Delta Blue/Beige
 Brandywine/Beige
 Deep Teal/Beige

SSV 235

PERFORMANCE DATA

*Performance data on the SSV 235 is not available at this time.
 Information will be sent at a later date.*

SALE PRICE

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

SSV 170 SKI & FISH

SPECIFICATIONS

LOA 17'1" (5.21 m.)
 Beam 88" (2.24 m.)
 Depth 43" (1.09 m.)
 Maximum Depth 59" (1.5 m.)
 Cockpit Depth 28½" (.72 m.)
 Approx. Wt. 1125 lbs. (511 kg.)
 Transom Width 73¼" (1.86 m.)

Transom Deadrise 21°
 LOA on Trailer 21'6" (6.55 m.)
 Fuel Capacity 20 gal. (75.7 L.)
 Maximum Load 1800 lbs. (817 kg.)
 Max. Persons 8 or 1150 lbs. (522 kg.)
 Maximum Horsepower 150
 NMMA Certified

Draft: A. Drive Unit Up 15½" (.39 m.)
 B. Drive Unit Down 28½" (.72 m.)

STANDARD FEATURES

Instrument panel includes:
 speedometer, tachometer, and
 fuel gauge; plus switches for
 bilge pump, navigation/anchor
 lights, panel lights, horn, and
 accessories

Bow panel includes: aerator switch,
 voltmeter, tilt switch, battery
 charger switch, battery selector
 switch, trolling motor plug

Concealed electric horn
 Bilge pump
 Navigation lighting
 AM/FM stereo cassette
 with 2 speakers
 Glove box
 Ski locker

Stainless steel bow eye
 and stern eyes
 6" cleats
 Walk-thru curved glass windshield
 Wraparound bow seats
 Bow converts to fishing deck
 2 removable fishing seats
 Anchor locker
 Passenger grab handle
 Molded swim platform
 Stainless steel boarding ladder
 Soft top with concealed storage
 Gelcoat accent stripes
 Aerated livewell
 Trolling motor mount
 Trolling motor battery trays
 Rod holders

OPTIONS

Canvas package: tonneau cover,
 walk-thru curtain, side curtains,
 stern curtain, soft top boot

Mooring cover
 Cockpit and tonneau bow covers

Fishing package:
 trolling motor, fish finder

Ski tow pylon
 Full glass side wings

OMC Pre-Rig includes: ignition
 switch with ignition interrupt
 switch, speedometer, tachometer,
 trim gauge, fuel gauge, voltmeter,
 manufacturer controls, pre-drilled
 transom

Dual cable steering
 Convenience package:
 depth sounder, hour meter

COLOR OPTIONS

Delta Blue/Beige
 Brandywine/Beige
 Deep Teal/Beige

SSV 170 SKI & FISH

PERFORMANCE DATA

ENGINE 90 EVINRUDE - PROP 13¼ x 17

RPM	MPH	GPH	RANGE*
2500	15	2.9	88
3400	25	4.2	102
4600	35	6.3	95
WOT	38-40	—	—

0-20 MPH Acceleration - 3.3 sec.

ENGINE 115 EVINRUDE - PROP 12¾ x 21

RPM	MPH	GPH	RANGE*
2500	15	3.6	71
3300	25	4.6	92
4700	35	7.2	83
WOT	42-44	—	—

0-20 MPH Acceleration - 3.2 sec.

ENGINE 135 MERCURY (V6) - PROP 13⅞ x 21 S/S LASER

RPM	MPH	GPH	RANGE*
2400	15	4.2	71
3000	25	5.1	87
4000	35	7.1	87
WOT	45-48	—	—

0-20 MPH Acceleration - 3.1 sec.

ENGINE 140 JOHNSON - PROP 14¼ x 21

RPM	MPH	GPH	RANGE*
2100	15	3.5	73
3300	25	4.4	97
4000	35	6.9	87
WOT	46-48	—	—

0-20 MPH Acceleration - 3.2 sec.

NOTE: All testing done with two persons and full tank of fuel.
 Performance results will vary depending on load, altitude, and other
 conditions.

***RANGE:** Mileage range at designated RPM and MPH as shown above starting with a
 full tank of gas.

SALE PRICE

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

SSV 175 SKI & FISH

SPECIFICATIONS

LOA 17'1" (5.21 m.)	Transom Width 73 1/4" (1.86 m.)
Beam 88" (2.24 m.)	Transom Deadrise 21°
Depth 43" (1.09 m.)	LOA on Trailer 21'6" (6.55 m.)
Maximum Depth 59" (1.5 m.)	Fuel Capacity 20 gal. (75.7 L.)
Cockpit Depth 28 1/2" (.72 m.)	Maximum Load 1250 lbs. (567 kg.)
Approx. Wt. w/3.0LX MerCruiser 1750 lbs. (794 kg.)	Max. Persons 8 or 1150 lbs. (522 kg.)
	NMMA Certified
Draft:	A. Drive Unit Up 16" (.41 m.)
	B. Drive Unit Down 31" (.79 m.)

STANDARD FEATURES

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories	6" cleats Walk-thru curved glass windshield Wraparound bow seats Bow converts to fishing deck 2 adjustable bucket seats/ 2 removable fishing seats/ bench seat
Bow panel includes: aerator switch, voltmeter, tilt switch, battery charger switch, battery selector switch, trolling motor plug	Anchor locker Passenger grab handle Molded swim platform Stainless steel boarding ladder Convertible stern sundeck/ fishing platform
Ce concealed electric horn Bilge pump and blower Navigation lighting AM/FM stereo cassette with 2 speakers	Soft top with concealed storage Gelcoat accent stripes Aerated livewell Trolling motor mount Trolling motor battery trays Rod holder Tackle box tray
Glove box Ski locker Ski tow ring Stainless steel bow eye and stern eyes	

OPTIONS

Canvas package: tonneau cover, walk-thru curtain, side curtains, stern curtain, soft top boot	Convenience package: depth sounder, hour meter
Mooring cover	Fishing package: trolling motor, fish finder
Cockpit and tonneau bow covers	High altitude prop
Full glass side wings	Merc/Volvo prop

ENGINE OPTIONS

3.0LX MerCruiser (WPS)	3.0 GS Volvo Penta (WPS)
4.3 MerCruiser	4.3 GL Volvo Penta

COLOR OPTIONS

Delta Blue/Beige
Brandywine/Beige
Deep Teal/Beige

SSV 175 SKI & FISH

PERFORMANCE DATA

ENGINE 3.0LX MERCUISER - PROP 13 3/4 x 21 AL

RPM	MPH	GPH	RANGE*
2100	15	2.5	102
2900	25	3.5	121
3500	35	7.4	80
WOT	42-45	—	—

0-20 MPH Acceleration - 3.4 sec.

ENGINE 4.3 MERCUISER - PROP 13 3/4 x 21 AL

RPM	MPH	GPH	RANGE*
2200	15	2.6	99
2900	25	3.8	112
3400	35	7.4	80
WOT	48-51	—	—

0-20 MPH Acceleration - 3.3 sec.

ENGINE 3.0 GS VOLVO PENTA - PROP 15 x 17 AL

RPM	MPH	GPH	RANGE*
2000	10	2.1	81
3000	20	3.2	106
4000	35	7.6	78
WOT	41-43	—	—

0-20 MPH Acceleration - 3.7 sec.

NOTE: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

***RANGE:** Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat	\$	_____
Motor _____ H.P.		_____
Trailer		_____
Accessories		_____
T, T & L		_____
TOTAL PRICE \$		_____

SSV 190 SKI & FISH

SPECIFICATIONS

LOA 18'7" (5.66 m.)	Transom Deadrise 21°
Beam 90 3/4" (2.31 m.)	LOA on Trailer 22' (6.71 m.)
Depth 47" (1.19 m.)	Fuel Capacity 35 gal. (132.5 L.)
Maximum Depth 63" (1.6 m.)	Maximum Load 1900 lbs. (863 kg.)
Cockpit Depth 28 3/4" (.73 m.)	Max. Persons 8 or 1150 lbs. (522 kg.)
Approx. Wt. 1200 lbs. (545 kg.)	Maximum Horsepower 175
Transom Width 75" (1.9 m.)	NMMA Certified
Draft:	A. Drive Unit Up 16" (.41 m.)
	B. Drive Unit Down 29" (.74 m.)

STANDARD FEATURES

Instrument panel includes: speedometer, tachometer, and fuel gauge; plus switches for bilge pump, navigation/anchor lights, panel lights, horn, and accessories	6" cleats
Bow panel includes: aerator switch, voltmeter, tilt switch, battery charger switch, battery selector switch, trolling motor plug	Walk-thru curved glass windshield
Concealed electric horn	Wraparound bow seats
Bilge pump	Bow converts to fishing deck
Navigation lighting	2 removable fishing seats
AM/FM stereo cassette with 2 speakers	Anchor locker
Glove box	Passenger grab handle
Ski locker	Molded swim platform
Stainless steel bow eye and stern eyes	Stainless steel boarding ladder
	Soft top with concealed storage
	Gelcoat accent stripes
	Aerated livewell
	Trolling motor mount
	Trolling motor battery trays
	Rod holders
	Dual cable steering

OPTIONS

Canvas package: tonneau cover, walk-thru curtain, side curtains, stern curtain, soft top boot	OMC Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom
Mooring cover	Convenience package: depth sounder, hour meter
Cockpit and tonneau bow covers	
Fishing package: trolling motor, fish finder	
Ski tow pylon	
Full glass side wings	

COLOR OPTIONS

Delta Blue/Beige
Brandywine/Beige
Deep Teal/Beige

SSV 190 SKI & FISH

PERFORMANCE DATA

ENGINE 90 EVINRUDE - PROP 13 1/4 x 17			
RPM	MPH	GPH	RANGE*
2700	15	3.0	160
3500	25	4.4	182
4800	35	6.5	173
WOT	37-39	—	—
0-20 MPH Acceleration - 3.4 sec.			

ENGINE 115 EVINRUDE - PROP 12 3/4 x 21			
RPM	MPH	GPH	RANGE*
2600	15	3.7	131
3400	25	4.8	166
4700	35	7.2	157
WOT	42-44	—	—
0-20 MPH Acceleration - 3.3 sec.			

ENGINE 135 MERCURY (V6) - PROP 13 7/8 x 21 S/S LASER			
RPM	MPH	GPH	RANGE*
2500	15	4.4	109
3100	25	5.3	150
4200	35	7.5	147
WOT	46-49	—	—
0-20 MPH Acceleration - 3.2 sec.			

ENGINE 150 JOHNSON - PROP 14 1/4 x 21			
RPM	MPH	GPH	RANGE*
2400	15	4.5	106
3000	25	5.5	144
3900	35	7.8	141
WOT	46-49	—	—
0-20 MPH Acceleration - 3.1 sec.			

NOTE: All testing done with two persons and full tank of fuel.
Performance results will vary depending on load, altitude, and other
conditions.

***RANGE:** Mileage range at designated RPM and MPH as shown above starting with a
full tank of gas.

SALE PRICE

Boat	\$	_____
Motor _____ H.P.		_____
Trailer		_____
Accessories		_____
T, T & L		_____
TOTAL PRICE \$		_____

SSV 195 SKI & FISH

SPECIFICATIONS

LOA 18'7" (5.66 m.)
 Beam 90 3/4" (2.31 m.)
 Depth 47" (1.19 m.)
 Maximum Depth 63" (1.6 m.)
 Cockpit Depth 28 3/4" (.73 m.)
 Approx. Wt. w/4.3LX MerCruiser
 2000 lbs. (908 kg.)

Transom Width 75" (1.9 m.)
 Transom Deadrise 21°
 LOA on Trailer 22' (6.71 m.)
 Fuel Capacity 35 gal. (132.5 L.)
 Maximum Load 1500 lbs. (681 kg.)
 Max. Persons 8 or 1150 lbs. (522 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 16 1/2" (.42 m.)
 B. Drive Unit Down 31 1/2" (.8 m.)

STANDARD FEATURES

Instrument panel includes:
 speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter and
 engine temperature gauges; plus
 switches for bilge pump, blower,
 horn, lights, and accessories
 Bow panel includes: aerator switch,
 voltmeter, tilt switch, battery
 charger switch, battery selector
 switch, trolling motor plug
 Concealed electric horn
 Bilge pump and blower
 Navigation lighting
 AM/FM stereo cassette
 with 2 speakers
 Glove box
 Ski locker
 Ski tow ring
 Stainless steel bow eye
 and stern eyes

6" cleats
 Walk-thru curved glass windshield
 Wraparound bow seats
 Bow converts to fishing deck
 2 adjustable bucket seats/
 2 removable fishing seats/
 bench seat
 Anchor locker
 Passenger grab handle
 Molded swim platform
 Stainless steel boarding ladder
 Convertible stern sundeck/
 fishing platform
 Soft top with concealed storage
 Gelcoat accent stripes
 Aerated livewell
 Trolling motor mount
 Trolling motor battery trays
 Rod holders
 Tackle box tray

OPTIONS

Canvas package: tonneau cover,
 walk-thru curtain, side curtains,
 stern curtain, soft top boot
 Mooring cover
 Cockpit and tonneau bow covers
 Convenience package:
 depth sounder, hour meter

Fishing package:
 trolling motor, fish finder
 High altitude prop
 Merc/Volvo prop
 Stainless steel prop (Merc only)
 Full glass side wings

ENGINE OPTIONS

4.3 MerCruiser
 4.3LX MerCruiser
 5.0LX MerCruiser
 5.7 MerCruiser

4.3 GL Volvo Penta
 5.0 FL Volvo Penta
 5.0 FI Volvo Penta
 5.8 FL Volvo Penta

COLOR OPTIONS

Delta Blue/Beige
 Brandywine/Beige
 Deep Teal/Beige

SSV 195 SKI & FISH

PERFORMANCE DATA

ENGINE 4.3LX MERCURISER - PROP 13 3/4 x 21 AL				RANGE*
RPM	MPH	GPH		
2400	15	3.0		160
3200	25	4.0		202
3700	35	7.9		141
WOT	47-49	—		—
0-20 MPH Acceleration - 3.3 sec.				

ENGINE 5.0LX MERCURISER - PROP 13 3/4 x 21 AL				RANGE*
RPM	MPH	GPH		
2200	15	3.3		144
2800	25	4.3		186
3500	35	8.0		141
WOT	53-57	—		—
0-20 MPH Acceleration - 3.1 sec.				

ENGINE 4.3 GL VOLVO PENTA - PROP 15 x 17 AL				RANGE*
RPM	MPH	GPH		
2000	15	2.8		161
3000	25	3.8		197
4000	35	6.9		152
WOT	42-45	—		—
0-20 MPH Acceleration - 3.2 sec.				

NOTE: All testing done with two persons and full tank of fuel.
 Performance results will vary depending on load, altitude, and other
 conditions.

*RANGE: Mileage range at designated RPM and MPH as shown above starting with
 full tank of gas.

SALE PRICE

Boat \$ _____
 Motor _____ H.P. _____
 Trailer _____
 Accessories _____
 T, T & L _____
TOTAL PRICE \$ _____

SSV 199

SPECIFICATIONS

LOA 18'7" (5.66 m.)
 Beam 90 3/4" (2.45 m.)
 Depth 53" (1.34 m.)
 Maximum Depth 69" (1.75 m.)
 Cockpit Depth 35" (.89 m.)
 Approx. Wt. w/4.3LX MerCruiser
 2000 lbs. (908 kg.)

Draft: A. Drive Unit Up 16 1/2" (.42 m.)
 B. Drive Unit Down 31 1/2" (.8 m.)

Transom Width 75" (1.9 m.)
 Transom Deadrise 21°
 LOA on Trailer 22' (6.71 m.)
 Fuel Capacity 35 gal. (132.5 L.)
 Maximum Load 1500 lbs. (681 kg.)
 Max. Persons 8 or 1150 lbs. (522 kg.)
 NMMA Certified

STANDARD FEATURES

Instrument panel includes:
 speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter and
 engine temperature gauges; plus
 switches for bilge pump, blower,
 horn, lights, and accessories

Concealed electric horn
 Automatic bilge pump
 Blower
 Navigation lighting
 AM/FM stereo cassette
 with 2 speakers
 Ski tow ring
 Stainless steel bow eye
 and stern eyes

6" cleats
 Walk-thru curved full glass
 windshield
 Passenger grab handle
 Stbd bucket seat/port sleeper seat
 with aft jump seats
 Molded swim platform
 Lockable cabin door
 Cabin light
 Forward V-berth
 Forward deck hatch
 Stainless steel boarding ladder
 Soft top with concealed storage
 Gelcoat accent stripes
 Tilt steering

OPTIONS

Canvas package: side curtains,
 stern curtain, soft top boot
 Mooring cover
 Cockpit cover
 High altitude prop
 Merc/Volvo prop
 Stainless steel prop (Merc only)

SL interior - buckets, stern bench,
 sun deck
 Convenience package:
 depth sounder, hour meter
 Portable marine head (4 gal.)
 Stainless steel stern rail package

ENGINE OPTIONS

4.3 MerCruiser
 4.3LX MerCruiser
 5.0LX MerCruiser
 5.7 MerCruiser

4.3 GL Volvo Penta
 5.0 FL Volvo Penta
 5.0 FI Volvo Penta
 5.8 FL Volvo Penta

COLOR OPTIONS

Delta Blue/Beige
 Brandywine/Beige
 Deep Teal/Beige

SSV 199

PERFORMANCE DATA

ENGINE 4.3LX MERCUISER - PROP 13 3/4 x 21 AL

RPM	MPH	GPH	RANGE*
2400	15	3.0	160
3200	25	4.0	202
3700	35	7.9	141
WOT	47-49	—	—

0-20 MPH Acceleration - 3.3 sec.

ENGINE 5.0LX MERCUISER - PROP 13 3/4 x 21 AL

RPM	MPH	GPH	RANGE*
2200	15	3.3	144
2800	25	4.3	186
3500	35	8.0	141
WOT	53-57	—	—

0-20 MPH Acceleration - 3.1 sec.

ENGINE 4.3 GL VOLVO PENTA - PROP 15 x 17 AL

RPM	MPH	GPH	RANGE*
2000	15	3.0	150
3000	25	3.8	197
4000	35	7.1	148
WOT	43-46	—	—

0-20 MPH Acceleration - 3.2 sec.

NOTE: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

***RANGE:** Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____
 Motor _____ H.P. _____
 Trailer _____
 Accessories _____
 T, T & L _____

TOTAL PRICE \$ _____

SSV 219

SPECIFICATIONS

LOA 21'2" (6.45 m.)
 Beam 97" (2.45 m.)
 Depth 58 1/2" (1.49 m.)
 Maximum Depth 71 1/2" (1.82 m.)
 Cockpit Depth 40 1/2" (1.03 m.)
 Approx. Wt. w/5.7 MerCruiser
 3100 lbs. (1407 kg.)

Transom Width 92" (2.34 m.)
 Transom Deadrise 19°
 LOA on Trailer 24'8" (7.51 m.)
 Fuel Capacity 45 gal. (170.3 L.)
 Maximum Load 1450 lbs. (658 kg.)
 Max. Persons 8 or 1150 lbs. (522 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 18 1/2" (.47 m.)
 B. Drive Unit Down 33" (.84 m.)

STANDARD FEATURES

Instrument panel includes:
 speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter and
 engine temperature gauges; plus
 switches for bilge pump, blower,
 horn, and accessories
 Concealed electric horn
 Automatic bilge pump
 Blower
 Navigation lighting
 AM/FM stereo cassette
 with 2 speakers
 Cockpit floor storage compartment
 Stainless steel ski tow
 Stainless steel bow rail
 6" cleats
 Stainless steel bow eye
 and stern eyes

Tilt steering
 Walk-thru curved full glass
 windshield
 Anchor locker
 Passenger grab handle
 Lockable cabin door
 Cabin light
 Forward V-berth
 Forward deck hatch
 Molded swim platform
 Stainless steel boarding ladder
 Soft top with concealed storage
 Gelcoat accent stripes
 Merc/Volvo controls
 Adjustable fold-out sleeper seats
 with aft jump seats

OPTIONS

Canvas package: side curtains,
 stern curtain, soft top boot
 Mooring cover
 Cockpit cover
 Camper canvas package: fwd and aft
 camper tops, plus boot,
 side curtains, stern curtain
 Convenience package:
 depth sounder, hour meter
 High altitude prop

Merc/Volvo prop
 Stainless steel prop (Merc only)
 SL interior - buckets, stern bench and
 sun deck
 Adjustable bucket/sleeper seating
 Portable marine head (4 gal.)
 Dual helm seat/entertainment console
 includes: sink, water system,
 alcohol stove and storage
 Stainless steel stern rail package

ENGINE OPTIONS

5.0LX MerCruiser
 5.7 MerCruiser
 5.7 EFI MerCruiser
 5.7 MerCruiser Bravo III
 7.4 MerCruiser

5.0 FL Volvo Penta
 5.0 FI Volvo Penta
 5.8 FL Volvo Penta
 5.8 FI Volvo Penta
 5.8 FL DP Volvo Penta

COLOR OPTIONS

Delta Blue/Beige
 Brandywine/Beige
 Deep Teal/Beige

SSV 219

PERFORMANCE DATA

ENGINE 5.7 MERCUISER - PROP 14 x 19 AL				RANGE*
RPM	MPH	GPH		
3000	28	8.9		164
3500	36	13.4		149
4000	47	17.4		133
WOT	48-50	—		—
0-20 MPH Acceleration - 3.7 sec.				

ENGINE 350 MERCUISER MAGNUM - PROP 19 QSS				RANGE*
RPM	MPH	GPH		
3000	29	8.9		164
3500	37	13.5		139
4000	47	17.6		139
WOT	51-53	—		—
0-20 MPH Acceleration - 3.6 sec.				

ENGINE 7.4 MERCUISER - PROP 23 MIRAGE				RANGE*
RPM	MPH	GPH		
3000	32	10.5		154
3500	38	14.2		139
4000	44	20.5		108
WOT	54-57	—		—
0-20 MPH Acceleration - 3.3 sec.				

ENGINE 5.0 FL VOLVO PENTA - PROP 14 1/2 x 19 AL				RANGE*
RPM	MPH	GPH		
2000	20	7.2		106
3000	30	8.6		133
4000	40	15.7		97
WOT	48-50	—		—
0-20 MPH Acceleration - 3.3 sec.				

NOTE: All testing done with two persons and full tank of fuel.
 Performance results will vary depending on load, altitude, and other conditions.

*RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

SSV 249

SPECIFICATIONS

LOA 24'10" (7.56 m.)
 Beam 102" (2.59 m.)
 Depth 80½" (2.05 m.)
 Maximum Depth 91" (2.32 m.)
 Cockpit Depth 35" (.89 m.)
 Approx. Wt. w/5.7 MerCruiser
 4385 lbs. (1986 kg.)

Draft: A. Drive Unit Up 17" (.43 m.)
 B. Drive Unit Down 35" (.89 m.)

Transom Width 98½" (2.51 m.)
 Transom Deadrise 20°
 LOA on Trailer N/A
 Fuel Capacity 56 gal. (211.7 L.)
 Maximum Load 2240 lbs. (1015 kg.)
 Max. Persons 16
 NMMA Certified

STANDARD FEATURES

Instrument panel includes:

speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter and
 engine temperature gauges; plus
 switches for bilge pump, blower,
 navigation/anchor lights, panel
 lights, interior lights, and horn;
 hour meter and depth sounder

Horn

Automatic bilge pump and blower

Compass

AM/FM stereo cassette with
 4 speakers

Welded bow and stern rails

Bow pulpit with roller and bow rope
 locker

Stainless steel bow eye and stern eyes

Stainless steel cleats

Complete walkaround deck

Curved full glass windshield

Translucent deck hatch

Main cabin includes:

enclosed head with 6-gallon
 porta-pottie, fiberglass shower
 stall, hanging clothes locker,
 cabin table, cabin courtesy lights,
 ice box, alcohol stove, and
 on-demand water faucet

18 gallon water tank

Molded swim platform

Stainless steel boarding ladder

Bimini top

Gelcoat accent stripes

Merc/Volvo controls

Tilt steering

Vented port and mid-cabin windows

Cockpit area includes:

deluxe captain's chair, L-shaped
 passenger seating with
 convertible aft seat, stern storage
 compartment and walk-through
 transom with gate

OPTIONS

Hydraulic trim tabs

Snap-in carpet

Galley package: 12V/110 refrigerator,
 single alcohol/elec. stove, 110
 dockside power, hot water heater

Dual battery switch

Manual china head with pump-out

Transom shower

Stbd windshield wiper

Canvas package for bimini top:
 side, aft, clear connector

Camper canvas package

Cockpit cover

High altitude prop

Merc/Volvo prop

Merc/Volvo high altitude prop

Stainless steel prop (Merc only)

ENGINE OPTIONS

5.0LX MerCruiser

5.7 MerCruiser

5.7 EFI MerCruiser

5.7 MerCruiser Bravo III

7.4 MerCruiser

7.4 MerCruiser Bravo III

5.8 FL Volvo Penta

5.8 Fi Volvo Penta

5.8 FL DP Volvo Penta

7.4 GL DP Volvo Penta

COLOR OPTIONS

Delta Blue/Beige

Brandywine/Beige

Deep Teal/Beige

SSV 249

PERFORMANCE DATA

*Performance data on the SSV 249 is not available at this time.
 Information will be sent at a later date.*

SALE PRICE

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

GS 195

SPECIFICATIONS

LOA 18'7" (5.66 m.)
 Beam 90 3/4" (2.31 m.)
 Depth 47" (1.19 m.)
 Maximum Depth 63" (1.6 m.)
 Cockpit Depth 28 3/4" (.73 m.)
 Approx. Wt. w/5.0 Fi Volvo Penta 2205 lbs. (1003 kg.)

Transom Width 75" (1.9 m.)
 Transom Deadrise 21°
 LOA on Trailer 22' (6.71 m.)
 Fuel Capacity 35 gal. (132.5 L.)
 Maximum Load 1500 lbs. (681 kg.)
 Max. Persons 10 or 1410 lbs. (640 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 16 1/2" (.42 m.)
 B. Drive Unit Down 31 1/2" (.8 m.)

STANDARD FEATURES

Instrument panel includes:
 speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories

Concealed electric horn
 Bilge pump and blower
 Navigation lighting
 AM/FM stereo cassette with 4 speakers
 Glove box
 Carpeted ski locker
 Ski tow ring
 Stainless steel bow eye and stern eyes
 6" cleats
 Walk-thru curved full glass windshield

Wraparound bow seats
 Bow and stern rails
 Anchor locker
 Passenger grab handle
 Deluxe Sport interior - buckets, stern bench, sundeck
 Molded swim platform
 Stainless steel boarding ladder
 Soft top with concealed storage
 Merc/Volvo prop
 Merc/Volvo controls
 Tilt steering
 Depth sounder
 Hour meter
 Deluxe sport graphics

OPTIONS

Canvas package: tonneau cover, walk-thru curtain, side curtains, stern curtain, soft top boot
 Mooring cover

Cockpit and tonneau bow covers
 High altitude prop
 Stainless steel prop (Merc only)

ENGINE OPTIONS

5.0LX MerCruiser

5.0 Fi Volvo Penta

STANDARD COLOR

Regal Red/White

GS 195

PERFORMANCE DATA

ENGINE 5.0LX MERCUISER - PROP 13 3/4 x 21 AL				RANGE*
RPM	MPH	GPH		
2200	15	3.3		144
2800	25	4.3		186
3500	35	8.0		141
WOT	53-57	—		—
0-20 MPH Acceleration - 3.1 sec.				

ENGINE 5.0 FI VOLVO PENTA - PROP 14 1/2 x 19 AL				RANGE*
RPM	MPH	GPH		
2200	15	N/A		N/A
2800	25	N/A		N/A
3500	35	N/A		N/A
WOT	54-58	—		—
0-20 MPH Acceleration - 3.1 sec.				

NOTE: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

ENGINE INFORMATION

The following pages contain data about sterndrives offered in our 1995 product.

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MERCUISER 3.0LX LITRE

135 hp/101 kw.
4
181
9.3:1
4400-4800
1.98:1
Power
Power
33³/₄"
22³/₁₆"
19⁷/₁₆" (above crankshaft CL)
28⁵/₈" (overall)
625 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MERCUISER 3.0 LX LITRE w/Power Steering

135 hp/101 kw.
4
181
9.3:1
4400-4800
1.98:1
Power
Power
33³/₄"
22³/₁₆"
19⁷/₁₆" (above crankshaft CL)
28⁵/₈" (overall)
625 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MERCUISER 4.3 LITRE w/Power Steering

160 hp/116 kw.
6
262
9.3:1
4400-4800
1.84:1
Power
Power
31¹³/₁₆"
29¹/₄"
20¹/₂" (above crankshaft CL)
802 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MERCUISER 4.3LX LITRE w/Power Steering

180 hp/134 kw.
6
262
9.3:1
4400-4800
1.84:1
Power
Power
31¹³/₁₆"
29¹/₄"
20¹/₂" (above crankshaft CL)
802 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MERCUISER 5.0LX LITRE

205 hp/153 kw.
8
305
9.3:1
4200-4600
1.50:1
Power
Power
36³/₁₆"
28¹/₂"
20³/₄" (above crankshaft CL)
28¹/₂" (overall)
893 lbs.

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MERCUISER 5.7 LITRE w/Power Steering

235 hp/172 kw.
8
350
9.0:1
4400-4800
1.50:1
Power
Power
36¹³/₁₆"
28¹/₂"
20" (above crankshaft CL)
27³/₄" (overall)
907 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

*Stainless steel propeller - standard

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

**MERCUISER 7.4 LITRE*
w/Power Steering**

300 hp/224 kw.
8
454
8.5:1
4200-4600
1.32:1
Power
Power
39"
32"
20 1/16" (above crankshaft CL)
1,125 lbs. (pkg. weight)

**5.7 MERCUISER BRAVO III
w/Power Steering**

250 hp/186 kw.
8
350
9.3:1
4400-4800
2.0:1
Power
Power
36 5/16"
29"
21 13/16" (above crankshaft CL)
998 lbs.

7.4 MERCUISER BRAVO III

300 hp/224 kw.
8
454
8.0:1
4200-4600
2.0:1
Power
Power
39"
32"
23" (above crankshaft CL)
1,125 lbs.

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

**3.0 GS VOLVO PENTA
130 hp/96 kw.**

4
181
9.3:1
4600
1.85:1
Power
Power
35 1/8"
24 3/4"
19 5/8" (above crankshaft CL)
696 lbs.

**4.3 GL VOLVO PENTA
160 hp/119 kw.**

6
262
9.3:1
4600
1.66:1
Power
Power
31 3/4"
29 1/2"
19 3/4" (above crankshaft CL)
896 lbs.

**5.0 FL VOLVO PENTA
190 hp/142 kw.**

8
302
8.4:1
4400
1.66:1
Power
Power
37 5/8"
28"
20 1/8" (above crankshaft CL)
955 lbs.

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.0 Fi VOLVO PENTA

215 hp/160 kw.
8
302
8.5:1
4600
1.66:1
Power
Power
37⁵/₈"
28¹/₂"
20⁷/₁₆" (above crankshaft CL)
980 lbs.

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.8 FL VOLVO PENTA

230 hp/171 kw.
8
351
8.3:1
4400
1.51:1
Power
Power
37⁵/₈"
29³/₄"
20¹/₄" (above crankshaft CL)
1,012 lbs.

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.8 Fi VOLVO PENTA

255 hp/190 kw.
8
351
8.8:1
4600
1.51:1
Power
Power
37⁵/₈"
30¹/₂"
22" (above crankshaft CL)
1,066 lbs.

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.8 FL DP VOLVO PENTA

235 hp/172 kw.
8
351
8.3:1
4600
1.51:1
Power
Power
37⁵/₈"
30¹/₂"
20¹/₄" (above crankshaft CL)
1,066 lbs.

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

7.4 GL DP VOLVO PENTA

300 hp/224 kw.
8
454
8.0:1
4600
1.78:1
Power
Power
40³/₄"
31³/₈"
21⁷/₈" (above crankshaft CL)
1,150 lbs.

GLASTRON®

700 West River Road • Little Falls, MN 56345