

GLASTRON

1996

PRODUCT

SPECIFICATION

MANUAL



You Can't Beat Experience.
1956 - 1996

TABLE OF CONTENTS

	Page
Introduction	2
Features and Benefits	4
Glastron Limited Warranty	8
Definitions of Boat Measurements	10
1996 Glastron Model Line-Up	11
1996 Glastron Model Specifications	12
Sterndrive Engine Information	46

The First Choice of Boaters for Forty Years

From our storied past to our pacesetting present, Glastron has lead the way in pleasure boating. No other brand has shown the same commitment to on-the-water performance. No other brand has shown the same penchant for leading edge innovations. And no other brand has consistently delivered so much for so little. As a result, Glastron has become the best-selling fiberglass runabout in the history of boating. And that's the ultimate measure of our success.

We're especially proud of our accomplishments in this, our 40th year. And we're proud of the way our past is reflected in our present.

The new Glastrons can take their place right alongside the Glastrons of the past as the new leaders in performance, design and value. They prove all over again that you just can't beat experience.

Proof Once Again That You Can't Beat Experience.

The new Glastrons have style and innovation written all over them, from the famous Glastron spear on the outside of the boat to the automotive-style appointments on the inside. We were one of the first to break with tradition back in 1956 when we produced our first fiberglass runabout. Today, we're still out there setting new trends.

We've pioneered manufacturing methods that keep costs down while improving quality. We're also using newer, more modern materials that last longer and look better. We've eliminated nearly all wood, a traditional but impractical material that adds weight and subtracts years from the life of a boat.

We're so sure of our manufacturing methods that we offer a five-year limited warranty on the hull and a two-year limited warranty on all other components.*

But performance comes first at Glastron. After all, it's not how nice it looks in the showroom that really counts. It's how well it performs for your customer on the water. And that's where we excel. Few boats even come close to matching our planing times, top speeds and fuel economy figures. Simply put, no boat is better at doing what a boat was meant to do.

*Propulsion warranties vary by manufacturer.

FEATURES AND BENEFITS

Before you sell a Glastron —
make sure your customer
knows these facts.

FACTS:

40 years in the marine industry.

Purchasing Power — owned by Genmar, the
largest independent boat builder.

Performance by Design— winner of 9 awards in
12 years for top boat performance.

- * One of the top three most recognized names
in the industry.
- * Largest percentage of repeat customers.
- * Glastron owners use their boats on average
more than owners of other brands.
- * Glastron owners on average have boated
longer than owners of other brands.
- * Glastron owners consider boat handling and
performance as the #1 reason to buy a
Glastron.
- * Glastron dealers have been in business longer
on average than dealers of other brands —
with better service and higher resale.
- * Glastron dealer reputation is considered
higher than other brand dealers surveyed.


** From independent marine market surveys conducted by
Irwin Broh and Associates, Inc.*

Before your customer makes
a choice —
shouldn't he compare
these features and benefits?

FEATURES:

BENEFITS:

- | | |
|--|--|
| 1. Solid foam core construction | Consistent overall strength without excessive weight for better performance |
| 2. Fiberglass stringer system | Strength, no wood to rot, foam filled. 4 times wider than ordinary wood stringers |
| 3. Wood stringer system fully fiberglass encapsulated | Where wood has to be used, stringers are fully fiberglass encapsulated to avoid moisture deterioration |
| 4. Five-year hull warranty/
2-years on other components | Glastron backs its products |

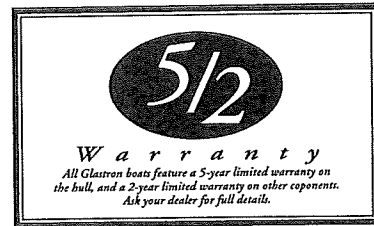

- | | |
|---|--|
| 5. Stringer system is bonded to hull with fiberglass | Rigid stringer system for strength |
| 6. Hull and deck joined with stainless steel screws, not pop rivets | Better seal; much stronger boat overall |
| 7. Fiberglass molded bow liner bolted to floor | Eliminates wood rot problem; better appearance; stronger |
| 8. Keel areas are overlapped with fiberglass | Double strength in this all-important area |

FEATURES:

- | FEATURES: | BENEFITS: |
|--|--|
| 9. Floor is resin-coated, top to bottom | Protects against wood rot |
| 10. All exposed wood treated with wood life preservative | Longer life; eliminates wood rot |
| 11. All deck fittings are backed by under-deck supports glassed into the deck | Strength; durability |
| 12. Motor mounts are fiberglass encapsulated to the hull | Strength; reduces engine vibration |
| 13. Aircraft locknuts on bolts | Strength; long term durability |
| 14. Marine-grade carpet — one piece lock looped | Appearance; no seams |
| 15. Marine-grade vinyl | UV protected; marine-grade stitching |
| 16. Carpeted storage areas | Appearance; padding for boating gear |
| 17. Carpeted ski locker with drain in sub-floor | Protects the ski; lets water drain away from the stringer system |
| 18. Rotocast nylon seat bases | Eliminates wood; longer life |
| 19. Bow storage drawers available on certain models | Roto-molded, one-piece construction for longer life |
| 20. All models feature automotive-style instrument panel | Easy-to-read gauges, convenient controls, improved styling |
| 21. Built-in swim platform with stainless steel boarding ladder below platform | Ease of boarding; lower platform than most competition |

FEATURES:

- | FEATURES: | BENEFITS: |
|--|--|
| 22. Each new model is carefully designed for the proper weight to horsepower ratio | Complete design concentration on performance; better planing time; better fuel economy |
| 23. Choice of MerCruiser or Volvo Penta Power | Better choices for each type of boat use |
| 24. Choice of OMC or Mercury Marine Pre-Rig on all outboards | Factory controls and gauges for complete package |

There are many more facts and features that have allowed Glastron to be recognized as an industry leader in innovation and safety. Make sure your customers know why Glastron is...

**MORE BOAT
FOR THE MONEY.**

GLASTRON LIMITED WARRANTY

Glastron Boats, a division of Larson/Glastron Boats, Inc., a subsidiary of Genmar Industries, Inc. ("Manufacturer") warrants to the first retail purchaser ("buyer") of the products it manufactures, under the name Glastron Boats, which are purchased from a factory authorized dealer, that should the hull be proven to be structurally defective in material or workmanship under normal operating conditions: Manufacturer will make the structural repairs (or, at its sole discretion, replace the affected part) necessitated thereby for a period of five (5) years from the date the product was purchased by the buyer. Manufacturer also warrants to the buyer to repair (or replace at its sole discretion) non-structural defects in material and workmanship under normal operating conditions subject to the exclusions set forth below for a period of two (2) years. This limited warranty is subject to the following terms and conditions.

If not demanded already, Manufacturer demands that the buyer examine the product to discover any defects in material or workmanship and notify Manufacturer or the selling dealer of same. During the warranty period, warranty repairs will be made without charge by the selling dealer, at the dealer's store or service facility or, at Manufacturer's election, by Manufacturer at its factory. Transportation to and from a Dealership or to Manufacturer's factory shall be at buyer's expense. Manufacturer's election to repair the defective product or replace the defective part is the exclusive remedy of the buyer and is a condition precedent to any legal or equitable action against Manufacturer. Any action for breach of warranty relating to a product must be brought within a period of sixty (60) days following Manufacturer's failure to repair the product or replace the defective part.

WHAT IS NOT COVERED:

This Warranty does not cover:

1. A product which has been repaired or altered without authorization of Manufacturer by persons other than Manufacturer or an authorized Dealer or altered in any way so as to effect its use and operation;
2. Engines, outdrives, controls, propellers, batteries or other equipment or accessories which are not warranted by such other manufacturers; or not warranted by Manufacturer whether or not
3. Gelcoat finishes, cracking, crazing, blistering including osmotic blistering;
4. Windshield breakage;
5. Leakage around windshields, hatches or other apertures;
6. A product which has been subjected to unreasonable use, tampering, abuse, mishandling, improper maintenance, negligence, improper trailer, alteration, accident, or used for racing or commercial purposes, or which has been operated contrary to any printed instructions furnished by Manufacturer;

7. A product which has been overpowered according to the maximum recommended engine horsepower specified on the capacity plate affixed thereto;
8. Any representations relating to the speed of the product or weight;
9. Loss of time, inconvenience, travel expense, loss of use, haul out, launch, towing, storage charges or other matters not specifically covered hereunder;
10. Dealer preparation, cleaning and final adjustments and alignments in preparing boat for delivery or commissioning;
11. Any act of God.

This warranty gives you specific rights, and you may also have other rights which vary from state to state. This warranty is governed by the laws of the State of Minnesota. This document contains the entire warranty given by Manufacturer and there are no terms, promises, conditions or warranties other than those contained herein. No oral or written information or advice given by Manufacturer, its dealers, representatives, agents or employees shall create a warranty or in any way increase the scope of this warranty. Manufacturer does not authorize any person to extend the time of this warranty or to create or assume for it any other obligation or liability with respect to its products. No person, including a dealer, is authorized to make any repairs or replacements under this warranty without the prior written approval of Manufacturer. Manufacturer reserves the right to improve its products through changes in design, material or parts without being obligated to incorporate such changes in products previously manufactured. This warranty is not transferable or assignable.

THIS EXPRESS WARRANTY IS IN LIEU OF, AND MANUFACTURER DISCLAIMS, ANY AND ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, WHATSOEVER INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES UNDER THE UNIFORM COMMERCIAL CODE, ANY IMPLIED WARRANTY OR MERCHANTABILITY AND ANY IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, THIS WARRANTY SHALL BE THE SOLE AND EXCLUSIVE REMEDY OF ANY PERSON WHETHER IN CONTRACT, TORT OR OTHERWISE AND MANUFACTURER SHALL NOT BE LIABLE FOR CONSEQUENTIAL, SPECIAL OR INCIDENTAL DAMAGE, LOST PROFITS, INCONVENIENCE, OR DAMAGE RESULTING FROM A BREACH OF THE EXPRESS OR ANY IMPLIED WARRANTY WHICH IS NOT DISCLAIMED HEREIN NOR ANY OTHER LOSS OR DAMAGE, EXCEPT AS SET FORTH ABOVE.

In the event that the disclaimer and exclusion of warranties and damages are inconsistent with applicable law, those disclaimers and exclusions are limited to the maximum permitted by applicable law, and all remaining implied obligations and warranties are limited in duration to a period of two (2) years or such shorter period as permitted by applicable law.

Some states do not allow limitations on implied warranties, or the exclusion or limitation of incidental or consequential damages, so the limitations or exclusions may not apply to you.

DEFINITIONS OF BOAT MEASUREMENT

Length Overall (LOA) — Distance along the waterline from the tip of the bow to the aft-most part of the hull.

Maximum Beam — Maximum width of the boat.

Maximum Width — Maximum width of the boat at transom.

Depth — Vertical distance from lowest point of the keel to the highest point of the boat, excluding windshields, lights and other removable components.

Transom — Vertical distance at boat's centerline from the keel/transom intersection to the transom top.

Maximum Depth — Vertical distance from lowest point of the keel to the highest point of boat, including windshields.

Cockpit Depth — Vertical distance from boat floor to top of gunwale as measured at the driver's seat.

Length Overall on Trailer — Distance measured along the boat centerline, from forward-most point of trailer to aft-most point of motor/outdrive.

Boat Height on Trailer — Vertical distance from ground to highest point of boat, including windshield.

Draft (Drive unit up) — Total number of inches of boat and/or motor and drive unit below the waterline. Measured unloaded, with the motor/drive unit in the full up position.

Draft (Drive unit down) — Total number of inches of boat and/or motor and drive unit below the waterline. Measured unloaded, with the motor/drive unit in the full down position.

1996 GLASTRON MODEL LINE-UP

SPECIAL EDITIONS

SE 170
SE 175
SE 177
SE 195
SE 199
SE 175 SKI & FISH

GS OUTBOARDS

GS 160
GS 180

GS STERNDRIVES

GS 185
GS 187
GS 205
GS 215
GS 235

GS SKI & FISH

GS 180 SKI & FISH
GS 185 SKI & FISH

GS SPORT CRUISER

GS 249

GS ANNIVERSARY EDITION

GS 205

MODEL DESIGNATOR CODE

0 — Outboard Model
5 — Open Bow Sterndrive Model
7 — Closed Bow Sterndrive Model
9 — Cuddy Cabin Sterndrive Model

SE 170

SPECIFICATIONS

LOA 17'1" (5.21m.)	Transom Deadrise 21°
Beam 88" (2.24 m.)	LOA on Trailer 21'6" (6.55 m.)
Depth 43" (1.09 m.)	Fuel Capacity 20 gal. (75.7 L.)
Maximum Depth 59" (1.5 m.)	Maximum Load 1800 lbs. (810 kg.)
Cockpit Depth 28½" (.72 m.)	Max. Persons 8 or 1150 lbs. (518 kg.)
Approx. Wt. 1125 lbs. (506 kg.)	Maximum Horsepower 140
Transom Width 73½" (1.86 m.)	NMMA Certified
Draft:	A. Drive Unit Up 15½" (.39m)
	B. Drive Unit Down 29½" (.72m.)

STANDARD FEATURES

Instrument panel includes: speedometer, tachometer, and fuel gauges, plus switches for bilge pump, Navigation/anchor lights, panel lights, horn and accessories	Stainless steel bow eye and stern eyes 6" cleats Walk-thru curved full glass windshield Wraparound bow seats
Concealed electric horn	Bow storage drawers
Bilge pump	Anchor locker
Navigation lighting	Passenger grab handle
AM/FM stereo cassette with 2 speakers	Adjustable bucket/bench seating
Glove box	Molded swim platform
Ski locker	Stainless steel boarding ladder Soft top with concealed storage

OPTIONS

Canvas package: tonneau bow cover, walk-thru curtain, side curtains, stern curtain, soft top boot	Cockpit cover
Mooring cover	Tonneau bow cover
	Dual cable steering
	Ski tow pylon

ENGINE OPTIONS

OMC Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom	135 hp Mercury or Mariner*
90 hp Mercury or Mariner*	90 hp Force*
115 hp Mercury or Mariner*	120 hp Force *
	<i>*(Engine will be shipped with boat from factory; boat will be pre-rigged with Mercury/Mariner or Force parts same as OMC Pre-Rig)</i>

STANDARD COLOR

Brandywine/Beige

SE 170

PERFORMANCE DATA

ENGINE 90 EVINRUDE — PROP 13¼ X 17			
RPM	MPH	GPH	RANGE*
2500	15	2.9	88
3400	25	4.2	102
4600	35	6.3	95
WOT	38-40	—	—

0-20 MPH Acceleration 3.3 — sec.

ENGINE 115 EVINRUDE — PROP 12¼ X 21			
RPM	MPH	GPH	RANGE*
2500	15	3.6	71
3300	25	4.6	92
4700	35	7.2	83
WOT	42-44	—	—

0-20 MPH Acceleration — 3.2 sec.

ENGINE 135 MERCURY (V6) — PROP 13¼ X 21 S/S LASER			
RPM	MPH	GPH	RANGE*
2400	15	4.2	71
3000	25	5.1	87
4000	35	7.1	87
WOT	45-48	—	—

0-20 MPH Acceleration — 3.1 sec.

ENGINE 140 JOHNSON — PROP 14¼ X 21			
RPM	MPH	GPH	RANGE*
2100	15	3.5	73
3300	25	4.4	97
4000	35	6.9	87
WOT	46-48	—	—

0-20 MPH Acceleration — 3.2 sec.

NOTE: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

***RANGE:** Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat	\$ _____
Motor _____ H.P.	_____
Trailer	_____
Accessories	_____
T, T & L	_____

TOTAL PRICE \$ _____

SE 175

SPECIFICATIONS

LOA 17'1" (5.21 m.)
 Beam 88" (2.24 m.)
 Depth 43" (1.09 m.)
 Maximum Depth 59"
 Cockpit Depth 28 1/2" (.72 m.)
 Approx. Wt. w/3.0 GS Volvo Penta
 Prop 1650 lbs. (743 kg.)
 Draft:
 A. Drive Unit Up 16" (.41 m.)
 B. Drive Unit Down 31" (.79 m.)

Transom Width 73 1/4" (1.86 m.)
 Transom Deadrise 21°
 LOA on Trailer 21'6" (6.55 m.)
 Fuel Capacity 20 gal. (75.7 L.)
 Maximum Load 1250 lbs. (563 kg.)
 Max. Persons 8 or 1150 lbs. (518 kg.)
 NMMA Certified

STANDARD FEATURES

Instrument panel includes:
 speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter and
 engine temperature gauges; plus
 switches for bilge pump, blower,
 horn, lights, and accessories
 Concealed electric horn
 Bilge pump and blower
 Navigation lighting
 AM/FM stereo cassette with
 2 speakers
 Glove box
 locker
 Ski
 Ski
 tow ring

Stainless steel bow eye and stern eyes
 6" cleats
 Walk-thru curved full glass
 Windshield
 Wraparound bow seats
 Bow storage drawers
 Anchor locker
 Passenger grab handle
 Fold-out sleeper seats with aft
 jump seats
 Molded swim platform
 Stainless boarding ladder
 Soft top with concealed storage
 Merc/Volvo prop

OPTIONS

Canvas package: tonneau bow cover,
 walk-thru curtain, side curtains,
 stern curtain, soft top boot
 Mooring cover
 Cockpit cover
 tonneau bow cover

High altitude prop
 Super Sport Package includes:
 2 bucket seats/aft bench
 seating/sun lounge, depth sounder
 and hour meter

ENGINE OPTIONS

3.0LX MerCruiser (WOPS)
 3.0LX MerCruiser (WPS)

3.0 GS Volvo Penta (WOPS)
 3.0 GS Volvo Penta (WPS)

STANDARD COLOR

Brandywine/Beige

SE 175

PERFORMANCE DATA

ENGINE 3.0LX MERCURISER — PROP 13 1/4 X 21 AL			
RPM	MPH	GPH	RANGE*
2100	15	2.5	102
2900	25	3.5	121
3500	35	7.4	80
WOT	42-45	—	—
0-20 MPH Acceleration — 3.4 sec.			

ENGINE 3.0 GS VOLVO PENTA — PROP 15 X 17			
RPM	MPH	GPH	RANGE*
2000	10	2.1	81
3000	20	3.2	106
4000	35	7.6	78
WOT	41-43	—	—
0-20 MPH Acceleration — 3.7 sec.			

NOTE: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____
 Motor _____ H.P. _____
 Trailer _____
 Accessories _____
 T, T & L _____
 TOTAL PRICE \$ _____

SE 177

SPECIFICATIONS

LOA 17'1" (5.21 m.)	Transom Width 73 1/4" (1.86 m.)
Beam 88" (2.24 m.)	Transom Deadrise 21°
Depth 43" (1.09 m.)	LOA on Trailer 21'6" (6.55 m.)
Maximum Depth 59" (1.5 m.)	Fuel Capacity 20 gal. (75.7 L.)
Cockpit Depth 28 1/2" (.72 m.)	Maximum Load 1250 lbs. (563 kg.)
Approx. Wt. w/3.0 GS Volvo Penta 1650 lbs. (743 kg.)	Max. Persons 8 or 1150 lbs. (518 kg.)
	NMMA Certified
Draft:	A. Drive Unit Up 16" (.41 m.)
	B. Drive Unit Down 31" (.79 m.)

STANDARD FEATURES

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories	Ski tow ring Stainless steel bow eye and stern eyes 6" cleats Walk-thru curved full glass windshield Anchor locker
Concealed electric horn	Passenger grab handle
Bilge pump and blower	Two bucket seats/aft bench seating/sun lounge
Navigation lighting	Molded swim platform
AM/FM stereo cassette with 2 speakers	Stainless steel boarding ladder
Glove box	Soft top with concealed storage
Ski locker	Merc/Volvo prop

OPTIONS

Canvas package: side curtains, stern curtain, soft top boot	Cockpit cover
Mooring cover	Bow pad
Convenience package: depth sounder, hour meter	High altitude prop

ENGINE OPTIONS

3.0LX MerCruiser (WOPS)	3.0 GS Volvo Penta (WOPS)
3.0LX MerCruiser (WPS)	3.0 GS Volvo Penta (WPS)

STANDARD COLOR

Brandywine/Beige

SE 177

PERFORMANCE DATA

ENGINE 3.0LX MERCUISER — PROP 13 1/4 X 21 AL

RPM	MPH	GPH	RANGE*
2100	15	2.5	102
2900	25	3.5	121
3500	35	7.4	80
WOT	42-45	—	—

0-20 MPH Acceleration — 3.3 sec.

ENGINE 3.0 GS VOLVO PENTA — PROP 15 X 17 AL

RPM	MPH	GPH	RANGE*
2000	10	2.1	81
3000	20	3.2	106
4000	35	7.6	78
WOT	41-43	—	—

0-20 MPH Acceleration — 3.1 sec.

NOTE: All testing done with two persons and full tank of fuel.
Performance results will vary depending on load, altitude, and other conditions.

***RANGE:** Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat	\$ _____
Motor _____ H.P.	_____
Trailer	_____
Accessories	_____
T, T & L	_____
TOTAL PRICE \$	_____

SE 195

SPECIFICATIONS

LOA 18'7" (5.66 m.)	Transom Width 75" (1.9 m.)
Beam 90 3/4" (2.31 m.)	Transom Deadrise 21°
Depth 47" (1.19 m.)	LOA on Trailer 22' (6.71 m.)
Maximum Depth 63" (1.6 m.)	Fuel Capacity 35 gal. (132.5 L.)
Cockpit Depth 28 3/4" (.73 m.)	Maximum Load 1500 lbs. (675 kg.)
Approx. Wt. w/4.3LX MerCruiser 2000 lbs. (900 kg.)	Max. Persons 10 or 1410 lbs. (635 kg.)
	NMMA Certified
Draft:	A. Drive Unit Up 16 1/2" (.42 m.)
	B. Drive Unit Down 31 1/2" (.8 m.)

STANDARD FEATURES

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories	Stainless steel bow eye and stern eyes 6" cleats Walk-thru curved full glass windshield Wraparound bow seats Bow storage drawers Anchor locker Passenger grab handle Adjustable fold-out sleeper seats with aft jump seats Molded swim platform Stainless steel boarding ladder Soft top with concealed storage Merc/Volvo prop
Concealed electric horn Bilge pump and blower Navigation lighting AM/FM stereo cassette with 2 speakers Glove box Ski locker Ski tow ring	

OPTIONS

Canvas package: tonneau bow cover, walk-thru curtain, side curtains, stern curtain, soft top boot Mooring cover Cockpit cover Tonneau bow cover	High altitude prop Super Sport Package includes: 2 bucket seats/aft bench seating/sun lounge, depth sounder and hour meter
--	--

ENGINE OPTIONS

3.0LX MerCruiser (WOPS)	3.0 GS Volvo Penta (WOPS)
3.0LX MerCruiser (WPS)	3.0 GS Volvo Penta (WPS)
4.3LX MerCruiser	5.0 FL Volvo Penta

STANDARD COLOR

Brandywine/Beige

SE 195

PERFORMANCE DATA

ENGINE 4.3LX MERCUISER — PROP 13 3/4 X 21 AL

RPM	MPH	GPH	RANGE*
2400	15	3.0	160
3200	25	4.0	202
3700	35	7.9	141
WOT	44-46	—	—

0-20 MPH Acceleration — 3.3 sec.

ENGINE 5.0 FL VOLVO PENTA — PROP 14 1/2 X 19 AL

RPM	MPH	GPH	RANGE*
2200	15	3.3	144
2800	25	4.3	186
3500	35	8.0	141
WOT	51-53	—	—

0-20 MPH Acceleration — 3.2 sec.

NOTE: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

***RANGE:** Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

SPECIFICATIONS

LOA 18'7" (5.66 m.)
 Beam 90" (2.45 m.)
 Depth 53" (1.34 m.)
 Maximum Depth 69" (1.75 m.)
 Cockpit Depth 35" (.89 m.)
 Approx. Wt. w/4.3LX MerCruiser
 2000 lbs. (900 kg.)
 Draft:

Transom Width 75" (1.9 m.)
 Transom Deadrise 21°
 LOA on Trailer 22' (6.71 m.)
 Fuel Capacity 35 gal. (132.5 L.)
 Maximum Load 1500 lbs. (675 kg.)
 Max. Persons 8 or 1150 lbs. (518 kg.)
 NMMA Certified
 A. Drive Unit Up 16 1/2" (.42 m.)
 B. Drive Unit Down 3 1/2" (.8 m.)

STANDARD FEATURES

Instrument panel includes:
 speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter and
 engine temperature gauges; plus
 switches for bilge pump, blower,
 horn, lights and accessories
 Concealed electric horn
 Automatic bilge pump
 Blower
 Navigation lighting
 AM/FM stereo cassette with
 2 speakers
 Ski tow ring
 Stainless steel bow eye and stern eyes

6" cleats
 Walk-thru curved full glass
 windshield
 Passenger grab handle
 Starboard bucket seat/port sleeper
 seat w/aft jump seats
 Molded swim platform
 Lockable cabin door
 Cabin light
 Forward V-berth
 Forward deck hatch
 Stainless steel boarding ladder
 Soft top with concealed storage
 Merc/Volvo prop

OPTIONS

Canvas package: side curtains, stern
 curtain, soft top boot
 Mooring cover
 Cockpit cover
 High altitude prop

Super Sport Package includes:
 2 bucket seats/aft bench
 seating/sun lounge, depth sounder
 and hour meter

ENGINE OPTIONS

3.0LX MerCruiser (WOPS)
 3.0LX MerCruiser (WPS)
 4.3LX MerCruiser

3.0 GS Volvo Penta (WOPS)
 3.0 GS Volvo Penta (WPS)
 5.0 FL Volvo Penta

STANDARD COLOR

Brandywine/Beige

PERFORMANCE DATA

ENGINE 4.3LX MERCURISER — PROP 13 1/4 X 21 AL

RPM	MPH	GPH	RANGE*
2400	15	3.0	160
3200	25	4.0	202
3700	35	7.9	141
WOT	47-49	—	—

0-20 MPH Acceleration — 3.3 sec.

ENGINE 3.0 GS VOLVO PENTA — PROP 15 X 17 AL

RPM	MPH	GPH	RANGE*
2300	15	2.8	179
3000	25	3.8	211
3800	35	7.8	144
WOT	43-45	—	—

0-20 MPH Acceleration — 3.2 sec.

NOTE: All testing done with two persons and full tank of fuel.
 Performance results will vary depending on load, altitude, and other conditions.

***RANGE:** Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

SE 175 SKI & FISH

SPECIFICATIONS

LOA 17'1" (5.21 m.)
 Beam 88" (2.24 m.)
 Depth 43" (1.09 m.)
 Maximum Depth 59" (1.5 m.)
 Cockpit Depth 28½" (.72 m.)
 Approx. Wt. w/3.0LX MerCruiser
 1750 lbs. (788 kg.)
 Draft:

Transom Width 73¼" (1.86 m.)
 Transom Deadrise 21°
 LOA on Trailer 21'6" (6.55 m.)
 Fuel Capacity 20 gal. (75.7 L.)
 Maximum Load 1250 lbs. (538 kg.)
 Max. Persons 8 or 1150 lbs. (518 kg.)
 NMMA Certified

A. Drive Unit Up 16" (.41 m.)
 B. Drive Unit Down 31" (.79 m.)

STANDARD FEATURES

Instrument panel includes:
 speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter and
 engine temperature gauges; plus
 switches for bilge pump, blower,
 horn, lights and accessories
 Bow panel includes: aerator switch,
 voltmeter, tilt switch, battery
 charger switch, battery selector
 switch, trolling motor plug
 Concealed electric horn
 Bilge pump and blower
 Navigation lighting
 AM/FM stereo cassette with
 2 speakers
 Glove box
 Ski locker
 Ski tow ring
 Stainless steel bow eye and stern eyes
 6" cleats

Walk-thru curved open glass
 windshield
 Wraparound bow seats
 Bow converts to fishing deck
 2 adjustable bucket seats/
 2 removable fishing seats/bench seat
 Anchor locker
 Passenger grab handle
 Molded swim platform
 Stainless steel boarding ladder
 Convertible stern sundeck/fishing
 platform
 Soft top with concealed storage
 Aerated livewell
 Trolling motor mount
 Trolling motor battery trays
 Rod holder
 Tackle box tray
 Merc/Volvo prop

OPTIONS

Canvas package: tonneau bow cover,
 walk-thru curtain, side curtains,
 stern curtain, soft top boot
 Mooring cover
 Cockpit cover
 Tonneau bow cover

Fishing package: trolling motor,
 fish finder
 High altitude prop
 Convenience package: depth
 sounder, hour meter

ENGINE OPTIONS

3.0LX MerCruiser (WPS)
 3.0LX MerCruiser (WOPS)

3.0 GS Volvo Penta (WPS)
 3.0 GS Volvo Penta (WOPS)

STANDARD COLOR

Brandywine/Beige

SE 175 SKI & FISH

PERFORMANCE DATA

ENGINE 3.0LX MERCUISER — PROP 13¼ X 21 AL			
RPM	MPH	GPH	RANGE*
2100	15	2.5	102
2900	25	3.5	121
3500	35	7.4	80
WOT	42-45	—	—
0-20 MPH Acceleration — 3.4 sec.			

ENGINE 3.0 GS VOLVO PENTA — PROP 15 X 17 AL			
RPM	MPH	GPH	RANGE*
2000	10	2.1	81
3000	20	3.2	106
4000	35	7.6	78
WOT	41-43	—	—
0-20 MPH Acceleration — 3.3 sec.			

NOTE: All testing done with two persons and full tank of fuel.
 Performance results will vary depending on load, altitude, and other conditions.

*RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____
 Motor _____ H.P. _____
 Trailer _____
 Accessories _____
 T, T & L _____
TOTAL PRICE \$ _____

GS 160

SPECIFICATIONS

LOA 15'11 1/2" (4.86 m.)
 Beam 84" (2.13 m.)
 Depth 37" (.94 m.)
 Maximum Depth 42" (1.07 m.)
 Cockpit Depth 34" (.61 m.)
 Approx. Wt. 1050 lbs. (473 kg.)
 Transom Width 82" (2.08 m.)
 Draft:

Transom Deadrise 13°
 LOA on Trailer N/A
 Fuel Capacity 16 gal. (60.56 L.)
 Maximum Load 1292 lbs. (581 kg.)
 Max. Persons 5 or 725 lbs. (326 kg.)
 Maximum Horsepower 120
 NMMA Certified
 A. Drive Unit Up 15 1/2" (.39 m.)
 B. Drive Unit Down 28 1/2" (.72 m.)

STANDARD FEATURES

Instrument panel includes:
 speedometer, tachometer, fuel and
 trim gauges; plus switches for
 bilge pump, navigation/anchor
 lights, panel lights, horn, and
 accessories
 Concealed electric horn
 Bilge pump
 Navigation lighting
 AM/FM stereo cassette with
 2 speakers
 Glove box

Ski/kneeboard locker
 Stainless steel bow eye and stern eyes
 4" cleats
 Smoked plex windscreen
 Wraparound bow seats
 Bow storage
 Passenger grab handle
 Bucket/bench seating
 Molded swim platform
 Stainless steel boarding ladder
 Rear ski storage rack

OPTIONS

Ski tow pylon

Mooring cover
 Dual cable steering

ENGINE OPTIONS

OMC Pre-Rig includes: ignition
 switch with ignition interrupt
 switch, speedometer, tachometer,
 trim gauge, fuel gauge, voltmeter,
 manufacturer controls, pre-drilled
 transom
 75 hp Mercury or Mariner*
 90 hp Mercury or Mariner*

115 hp Mercury or Mariner*
 75 hp Force*
 90 hp Force*
 120 hp Force*

**(Engine will be shipped with boat
 from factory; boat will be pre-
 rigged with Mercury/Mariner or
 Force parts same as OMC Pre-Rig)*

STANDARD COLOR

Spectra Red/White

GS 160

PERFORMANCE DATA

ENGINE 90 EVINRUDE — PROP 13 1/4 X 17

RPM	MPH	GPH	RANGE*
2500	15	N/A	N/A
3400	25	N/A	N/A
4600	35	N/A	N/A
WOT	42-44	—	—
0-20 MPH Acceleration — 3.3 sec.			

ENGINE 115 EVINRUDE — PROP 12 3/4 X 21

RPM	MPH	GPH	RANGE*
2500	15	N/A	N/A
3300	25	N/A	N/A
4700	35	N/A	N/A
WOT	46-48	—	—
0-20 MPH Acceleration — 3.2 sec.			

NOTE: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

***RANGE:** Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

GS 180

SPECIFICATIONS

LOA 17'10 1/2" (5.46 m.)
 Beam 89 3/4" (2.28 m.)
 Depth 43" (1.09 m.)
 Maximum Depth 53" (1.35 m.)
 Cockpit Depth 28 1/2" (.72 m.)
 Approx. Wt. 1300 lbs. (585 kg.)
 Transom Width 84 1/2" (2.15 m.)
 Draft:
 A. Drive Unit Up 16" (.41 m.)
 B. Drive Unit Down 29" (.74 m.)

Transom Deadrise 20°
 LOA on Trailer 22' (6.71 m.)
 Fuel Capacity 20 gal (75.7 L.)
 Maximum Load 1798 lbs. (809 kg.)
 Max. Persons 8 or 1150 lbs. (518 kg.)
 Maximum Horsepower 150
 NMMA Certified

STANDARD FEATURES

Instrument panel includes:
 speedometer, tachometer, and fuel gauges; plus switches for bilge pump, navigation/anchor lights, panel lights, horn, and accessories

Concealed electric horn
 Bilge pump
 Navigation lighting
 AM/FM stereo cassette with 2 speakers
 Glove box
 Ski locker
 Tilt steering

Dual cable steering
 Stainless steel bow eye and stern eyes
 6" cleats
 Walk-thru curved full glass windshield
 Wraparound bow seats
 Anchor locker
 Passenger grab handle
 Adjustable bucket/bench seating
 Molded swim platform
 Stainless steel boarding ladder
 Soft top with concealed storage
 Gelcoat accent stripes

OPTIONS

Canvas package: tonneau bow cover, walk-thru curtain, side curtains, stern curtain, soft top boot
 Mooring cover
 Cockpit cover
 Tonneau bow cover

Convenience package: depth sounder, hour meter
 Ski tow pylon
 Clarion stereo cassette with 4 speakers

ENGINE OPTIONS

OMC Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom
 115 hp Mercury or Mariner*

135 hp Mercury or Mariner*
 150 hp Mercury or Mariner*
 120 hp Force*
 *(Engine will be shipped with boat from factory; boat will be pre-rigged with Mercury/Mariner or Force parts same as OMC Pre-Rig)

COLOR OPTIONS

Evergreen/White Ocean Blue/White Spectra Red/White

GS 180

PERFORMANCE DATA

ENGINE 90 EVINRUDE — PROP 13 1/4 X 17

RPM	MPH	GPH	RANGE*
2500	15	2.9	88
3400	25	4.2	102
4600	35	6.3	95
WOT	38-40	—	—

0-20 MPH Acceleration — 3.3 sec.

ENGINE 115 EVINRUDE — PROP 12 1/2 X 21

RPM	MPH	GPH	RANGE*
2500	15	3.6	71
3300	25	4.6	92
4700	35	7.2	83
WOT	42-44	—	—

0-20 MPH Acceleration — 3.2 sec.

ENGINE 135 MERCURY (V6) — PROP 13 1/2 X 21 S/S LASER

RPM	MPH	GPH	RANGE*
2400	15	4.2	71
3000	25	5.1	87
4000	35	7.1	87
WOT	46-49	—	—

0-20 MPH Acceleration — 3.1 sec.

NOTE: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

GS 185

SPECIFICATIONS

LOA 18' (5.49 m.)	Transom Width 84½" (2.15 m.)
Beam 89½" (2.28 m.)	Transom Deadrise 20°
Depth 43" (1.09 m.)	LOA on Trailer 21'6" (6.55 m.)
Maximum Depth 53" (1.35 m.)	Fuel Capacity 20 gal. (75.7 L.)
Cockpit Depth 28½" (.72 m.)	Maximum Load 1150 lbs. (518 kg.)
Approx. Wt. w/4.3 GS Volvo Penta 2100 lbs. (945 kg.)	Max. Persons 8 or 1150 lbs. (518 kg.)
Draft:	NMMA Certified
A. Drive Unit Up 16" (.41 m.)	
B. Drive Unit Down 31" (.79 m.)	

STANDARD FEATURES

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories	6" cleats
Concealed electric horn	Walk-thru curved full glass windshield
Bilge pump and blower	Wraparound bow seats
Navigation lighting	Hinged bow seats/storage
AM/FM stereo cassette with 2 speakers	Anchor locker
Glove box	Passenger grab handle
Ski locker	Adjustable fold-out sleeper seats with aft jump seats
Ski tow ring	Molded sleeper seat bases
Stainless steel bow eye and stern eyes	Molded swim platform
Tilt steering	Stainless steel boarding ladder
	Soft top with concealed storage
	Gelcoat accent stripes
	Merc/Volvo controls
	Merc/Volvo prop

OPTIONS

Canvas package: tonneau bow cover, walk-thru curtain, side curtains, stern curtain, soft top boot	SL seating: 2 bucket seats/aft bench seating
Mooring cover	Adjustable starboard bucket/port sleeper seating/aft jump seats
Cockpit cover	Bow filler cushion with table
Tonneau bow cover	Clarion stereo cassette with 4 speakers
High altitude prop	
Convenience package: depth sounder, hour meter	

ENGINE OPTIONS

3.0LX MerCruiser (WOPS)	3.0 GS Volvo Penta (WOPS)
3.0LX MerCruiser (WPS)	3.0 GS Volvo Penta (WPS)
4.3LX MerCruiser (WPS)	4.3 GS Volvo Penta
4.3LX Bravo III MerCruiser	4.3 Gi DP Volvo Penta

COLOR OPTIONS

Evergreen/White	Ocean Blue/White	Spectra Red/White
-----------------	------------------	-------------------

GS 185

PERFORMANCE DATA

ENGINE 3.0LX MERCUISER — PROP 13¼ X 21 AL			
RPM	MPH	GPH	RANGE*
2100	15	2.5	102
2900	25	3.5	121
3500	35	7.4	80
WOT	42-45	—	—
0-20 MPH Acceleration — 3.4 sec.			

ENGINE 4.3LX MERCUISER — PROP 13¼ X 21 AL			
RPM	MPH	GPH	RANGE*
2200	15	2.6	99
2900	25	3.8	112
3400	35	7.4	80
WOT	48-51	—	—
0-20 MPH Acceleration — 3.3 sec.			

ENGINE 3.0 GS VOLVO PENTA — PROP 15 X 17 AL			
RPM	MPH	GPH	RANGE*
2000	10	2.1	81
3000	20	3.2	106
4000	35	7.6	78
WOT	41-43	—	—
0-20 MPH Acceleration — 3.7 sec.			

NOTE: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

***RANGE:** Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat	\$ _____
Motor _____ H.P.	_____
Trailer	_____
Accessories	_____
T, T & L	_____
TOTAL PRICE \$	_____

GS 187

SPECIFICATIONS

LOA 18' (5.49 m.)	Transom Width 84½" (2.15 m.)
Beam 89¾" (2.28 m.)	Transom Deadrise 20°
Depth 43" (1.09 m.)	LOA on Trailer 21'6" (6.55 m.)
Maximum Depth 53" (1.35 m.)	Fuel Capacity 20 gal. (75.7 L.)
Cockpit Depth 28½" (.72 m.)	Maximum Load 1150 lbs. (518 kg.)
Approx. Wt. w/4.3 GS Volvo Penta 2100 lbs. (945 kg.)	Max. Persons 8 or 1150 lbs. (518 kg.)
Draft:	NMMA Certified
A. Drive Unit Up 16" (.41 m.)	
B. Drive Unit Down 31" (.79 m.)	

STANDARD FEATURES

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories	Tilt steering 6" cleats Walk-thru curved full glass windshield
Concealed electric horn	Bow access step
Bilge pump and blower	Passenger grab handle
Navigation lighting	Molded swim platform
AM/FM stereo cassette with 2 speakers	Stainless steel boarding ladder
Glove box	Soft top with concealed storage
Ski locker	Gelcoat accent stripes
Ski tow ring	Merc/Volvo controls
Stainless steel bow eye and stem eyes	SL seating: 2 bucket seats/aft bench seating Merc/Volvo prop

OPTIONS

Canvas package: side curtains, stern curtain, soft top boot	High altitude prop
Mooring cover	Bow pad
Cockpit cover	Clarion stereo cassette with 4 speakers
Convenience package: depth sounder, hour meter	

ENGINE OPTIONS

3.0LX MerCruiser (WOPS)	3.0 GS Volvo Penta (WOPS)
3.0LX MerCruiser (WPS)	3.0 GS Volvo Penta (WPS)
4.3LX MerCruiser (WPS)	4.3 GS Volvo Penta
4.3LX Bravo III MerCruiser	4.3 Gi DP Volvo Penta

COLOR OPTIONS

Evergreen/White	Ocean Blue/White	Spectra Red/White
-----------------	------------------	-------------------

GS 187

PERFORMANCE DATA

ENGINE 3.0LX MERCUISER — PROP 13¾ X 21 AL				RANGE*
RPM	MPH	GPH		
2100	15	2.5		102
2900	25	3.5		121
3500	35	7.4		80
WOT	42-43	—		—
0-20 MPH Acceleration — 3.4 sec.				

ENGINE 4.3LX MERCUISER — PROP 13¾ X 21 AL				RANGE*
RPM	MPH	GPH		
2200	15	2.6		99
2900	25	3.8		112
3400	35	7.4		80
WOT	48-51	—		—
0-20 MPH Acceleration — 3.3 sec.				

ENGINE 3.0 GS VOLVO PENTA — PROP 15 X 17 AL				RANGE*
RPM	MPH	GPH		
2000	10	2.1		81
3000	20	3.2		106
4000	35	7.6		78
WOT	41-43	—		—
0-20 MPH Acceleration — 3.7 sec.				

NOTE: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

***RANGE:** Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat	\$ _____
Motor _____ H.P.	_____
Trailer	_____
Accessories	_____
T, T & L	_____
TOTAL PRICE \$	_____

GS 205

SPECIFICATIONS

LOA 19'11" (6.07 m.)
 Beam 93½" (2.37 m.)
 Depth 45½" (1.16 m.)
 Maximum Depth 56½" (1.4 m.)
 Cockpit Depth 31½" (.81 m.)
 Approx. Wt. w/5.0 FL Volvo Penta
 2499 lbs. (1125 kg.)
 Draft:
 A. Drive Unit Up 16½" (.42 m.)
 B. Drive Unit Down 31½" (.8 m.)

Transom Width 88½" (2.25 m.)
 Transom Deadrise 20°
 LOA on Trailer 22' (6.71 m.)
 Fuel Capacity 34 gal. (128.69 L.)
 Maximum Load 1450 lbs. (653 kg.)
 Max. Persons 10 or 1450 lbs. (653 kg.)
 NMMA Certified

STANDARD FEATURES

Instrument panel includes:
 speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter and
 engine temperature gauges; plus
 switches for bilge pump, blower,
 horn, lights and accessories
 Concealed electric horn
 Bilge pump and blower
 Navigation lighting
 AM/FM stereo cassette with
 2 speakers
 Glove box
 Ski locker
 Ski tow ring
 Stainless steel bow eye and stern eyes
 6" cleats

Walk-thru curved full glass
 windshield
 Wraparound bow seats
 Hinged bow seats/storage
 Anchor locker
 Passenger grab handle
 Adjustable fold-out sleeper seats
 with aft jump seats
 Molded sleeper seat bases
 Molded swim platform
 Stainless steel boarding ladder
 Soft top with concealed storage
 Gelcoat accent stripes
 Merc/Volvo controls
 Tilt steering
 Merc/Volvo prop

OPTIONS

Canvas package: tonneau bow cover,
 walk-thru curtain, side curtains,
 stern curtain, soft top boot
 Mooring cover
 Cockpit cover
 Tonneau bow cover
 Convenience package: depth
 sounder, hour meter
 Clarion stereo cassette with
 4 speakers

High altitude prop
 Stainless steel prop (Merc. only)
 SL seating: 2 bucket seats/aft
 bench seating
 Adjustable starboard bucket/port
 sleeper seating/aft jump seats
 Bow filler cushions with table

ENGINE OPTIONS

4.3LX MerCruiser
 4.3LX Bravo III MerCruiser
 5.7L MerCruiser
 5.7LX MerCruiser
 5.7LX Bravo III MerCruiser
 5.7LX EFI MerCruiser

4.3 GS Volvo Penta
 4.3 Gi DP Volvo Penta
 5.0 FL Volvo Penta
 5.0 Fi Volvo Penta
 5.8 FL Volvo Penta
 5.7 Gi Volvo Penta

COLOR OPTIONS

Evergreen/White
 32

Ocean Blue/White

Spectra Red/White

GS 205

PERFORMANCE DATA

ENGINE 4.3LX MERCUISER — PROP 13¼ X 21 AL				RANGE*
RPM	MPH	GPH		
2400	15	3.0		160
3200	25	4.0		202
3700	35	7.9		141
WOT	47-49			
0-20 MPH Acceleration — 3.3 sec.				

ENGINE 5.0 FL VOLVO PENTA — PROP 14½ X 19 AL				RANGE*
RPM	MPH	GPH		
2200	15	3.3		144
2800	25	4.3		186
3500	35	8.0		141
WOT	51-53			
0-20 MPH Acceleration — 3.2 sec.				

ENGINE 5.7L MERCUISER — PROP 14 X 19 AL				RANGE*
RPM	MPH	GPH		
2200	15	N/A		N/A
2800	25	N/A		N/A
3500	35	N/A		N/A
WOT	53-57			
0-20 MPH Acceleration — 3.1 sec.				

NOTE: All testing done with two persons and full tank of fuel.
 Performance results will vary depending on load, altitude, and other conditions.

*RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____
 Motor _____ H.P. _____
 Trailer _____
 Accessories _____
 T, T & L _____

TOTAL PRICE \$ _____

GS 215

SPECIFICATIONS

LOA 21'2" (6.45 m.)
 Depth 97" (2.46 m.)
 Maximum Depth 61" (1.55 m.)
 Cockpit Wt. w/5.7L MerCruiser (1373 kg.)
 3050 lbs. Draft:

Transom Width 92" (2.34 m.)
 Transom Deadrise 19°
 LOA on Trailer 24'8" (7.52 m.)
 Fuel Capacity 44 gal. (166.54 L.)
 Maximum Load 1600 lbs. (720 kg.)
 Max. Persons 11 or 1551 lbs. (698 kg.)
 NMMA Certified
 A. Drive Unit Up 17 1/2" (.44 m.)
 B. Drive Unit Down 32" (.81 m.)

STANDARD FEATURES

Instrument panel includes:
 Speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter and
 engine temperature gauges; plus
 switches for bilge pump, blower,
 navigation/anchor lights, panel
 lights, interior lights and horn
 Concealed electric horn
 Gauge pump and blower
 Navigation lighting
 AM/FM stereo cassette with 2 speakers
 Lockable glove box
 Side locker
 Ski tow ring
 Stainless steel bow eye and stem eyes
 6" cleats

Walk-thru curved full glass windshield
 Wraparound bow seats
 Hinged bow seats/storage
 Anchor locker
 Passenger grab handle
 Adjustable fold-out sleeper seats
 with aft jump seats
 Molded sleeper seat bases
 Molded swim platform
 Stainless steel boarding ladder
 Soft top with concealed storage
 Gelcoat accent stripes
 Merc/Volvo controls
 Tilt steering
 Merc/Volvo prop

OPTIONS

Canvas package: tonneau bow cover,
 walk-thru curtain, side curtains,
 stern curtain, soft top boot
 Mooring cover
 Tonneau bow cover
 Convenience package: depth
 sounder, hour meter
 High altitude prop
 Stainless steel prop (Merc. only)

SL seating: bucket seats/aft
 bench seating
 Adjustable starboard bucket/port
 sleeper seating/aft jump seats
 Luxury interior package: U-shaped
 seating with added storage,
 4 stereo speakers, wraparound
 bow rails, stern rail, cockpit table
 Bow filler cushions with table
 Clarion stereo cassette with 4 speakers
 Clarion stereo CD player with 4 speakers

ENGINE OPTIONS

5.7L MerCruiser
 5.7LX MerCruiser
 5.7LX Bravo III MerCruiser
 (SL seating only)
 5.7LX EFI MerCruiser
 7.4L MerCruiser (SL seating only)

5.0 FL Volvo Penta
 5.0 Fi Volvo Penta
 5.7 Gi Volvo Penta
 5.8 FL Volvo Penta
 7.4 GL DP Volvo Penta
 (SL seating only)

COLOR OPTIONS

Evergreen/White Ocean Blue/White Spectra Red/White

GS 215

PERFORMANCE DATA

ENGINE 5.7L MERCURISER — PROP 14 X 19 AL

RPM	MPH	GPH	RANGE*
3000	28	8.9	163
3500	36	13.4	148
4000	47	17.4	133
WOT	50-54	—	—
0-20 MPH Acceleration — 3.7 sec.			

ENGINE 7.4L MERCURISER — PROP 23 MIRAGE

RPM	MPH	GPH	RANGE*
3000	32	10.5	154
3500	38	14.2	139
4000	44	20.5	108
WOT	57-61	—	—
0-20 MPH Acceleration — 3.3 sec.			

ENGINE 5.0FL VOLVO PENTA — PROP 14 1/2 X 19 AL

RPM	MPH	GPH	RANGE*
2000	20	7.2	106
3000	30	8.6	133
4000	40	15.7	97
WOT	48-50	—	—
0-20 MPH Acceleration — 3.3 sec.			

NOTE: All testing done with two persons and full tank of fuel.
 Performance results will vary depending on load, altitude, and other conditions.
 *RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

GS 235

SPECIFICATIONS

LOA 23'3 1/2" (7.09 m.)
 Beam 10'2" (2.59 m.)
 Depth 6 1/2" (1.64 m.)
 Maximum Depth 7 1/2" (1.97 m.)
 Cockpit Depth 37" (.94 m.)
 Max. Wt. w/5.7L MerCruiser
 Approx. lbs. (1778 kg.)
 Draft:

Transom Width 98 1/2" (2.51 m.)
 Transom Deadrise 20°
 LOA on Trailer N/A
 Fuel Capacity 56 gal. (212 L.)
 Maximum Load 2240 lbs. (1008 kg.)
 Max. Persons 16 or 2240 lbs. (1008 kg.)
 NMMA Certified

A. Drive Unit Up 17" (.43 m.)
 B. Drive Unit Down 35" (.89 m.)

STANDARD FEATURES

Instrument panel includes:
 speedometer, tachometer, trim,
 high oil pressure, voltmeter and
 engine temperature gauges; plus
 switches for bilge pump, blower,
 navigation/anchor lights, panel
 lights, interior lights and horn;
 hour meter and depth sounder
 Concealed electric horn
 Bilge pump and blower
 Merc/Volvo stereo with 2 speakers
 Lockable glove box
 Side locker
 Side tow ring
 Stainless steel bow eye and stern eyes
 6 cleats
 Walk-thru curved full glass windshield

Wraparound bow seats
 Full fiberglass cockpit liner
 Deluxe U-shaped cockpit seating
 with deluxe bucket seats
 Cockpit table
 Molded swim platform
 Stainless steel boarding ladder
 Bimini top with concealed storage
 Gelcoat accent stripes
 Merc/Volvo controls
 Tilt steering
 Port side cuddy compartment with
 vented port window
 Merc/Volvo prop
 Starboard side storage compartment
 with ice box
 Bow filler cushions

OPTIONS

Canvas package: tonneau bow cover,
 walk-thru curtain, side curtains, aft
 curtain, soft top boot
 Mooring cover
 Cockpit cover
 Tonneau bow cover
 Camper canvas package
 High altitude prop

Stainless steel prop (Merc. only)
 Merc/Volvo high altitude prop
 Porta-pottie
 Snap-in carpet
 Clarion stereo cassette with
 4 speakers
 Clarion stereo CD player with
 4 speakers

ENGINE OPTIONS

5.7L MerCruiser
 5.7LX MerCruiser
 5.7LX Bravo III MerCruiser
 5.7LX EFI MerCruiser
 7.4L MerCruiser
 7.4L Bravo III MerCruiser

5.0 FL Volvo Penta
 5.7 Gi Volvo Penta
 5.8 FL Volvo Penta
 5.8 FSI Volvo Penta
 7.4 Gi DP Volvo Penta
 7.4 GL DP Volvo Penta

COLOR OPTIONS

Evergreen/White

Ocean Blue/White

Spectra Red/White

GS 235

PERFORMANCE DATA

ENGINE 5.8 FL VOLVO PENTA — PROP 14 X 17 AL

RPM	MPH	GPH	RANGE*
2500	15	N/A	N/A
3400	25	N/A	N/A
4600	35	N/A	N/A
WOT	40-42	—	—

0-20 MPH Acceleration — 3.3 sec.

ENGINE 5.7LX MERCUISER — PROP 14 X 19 AL

RPM	MPH	GPH	RANGE*
2500	15	N/A	N/A
3300	25	N/A	N/A
4700	35	N/A	N/A
WOT	44-46	—	—

0-20 MPH Acceleration — 3.2 sec.

NOTE: All testing done with two persons and full tank of fuel.
 Performance results will vary depending on load, altitude, and other conditions.

***RANGE:** Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

GS 180 SKI & FISH

SPECIFICATIONS

LOA 17'10" (5.49 m.)	Transom Deadrise 20°
Beam 89" (2.28 m.)	LOA on Trailer 22' (6.71 m.)
Depth 43" (1.09 m.)	Fuel Capacity 20 gal. (75.7 L.)
Maximum Depth 53" (1.35 m.)	Maximum Load 1900 lbs. (855 kg.)
Cockpit Depth 28 1/2" (.72 m.)	Max. Persons 8 or 1150 lbs. (518 kg.)
Approx. Wt. 1425 lbs. (641 kg.)	Maximum Horsepower 150
Transom Width 84 1/2" (2.15 m.)	NMMA Certified
Draft:	A. Drive Unit Up 16" (.41 m.)
	B. Drive Unit Down 29" (.74 m.)

STANDARD FEATURES

Instrument panel includes: speedometer, tachometer, and fuel gauges; plus switches for bilge pump, navigation/anchor lights, panel lights, horn, and accessories	Stainless steel bow eye and stern eyes
Bow panel includes: aerator switch, voltmeter, tilt switch, battery charger switch, battery selector switch, trolling motor plug	Walk-thru curved open glass windshield
Concealed electric horn	Wraparound bow seats
Bilge pump	Bow converts to fishing deck
Navigation lighting	2 removable fishing seats
AM/FM stereo cassette with 2 speakers	Anchor locker
Glove box	Passenger grab handle
Ski locker	Molded swim platform
6" cleats	Stainless steel boarding ladder
	Soft top with concealed storage
	Gelcoat accent stripes
	Aerated livewell
	Trolling motor mount
	Trolling motor battery trays
	Rod holders
	Tackle box trays
	Dual cable steering

OPTIONS

Canvas package: tonneau bow cover, walk-thru curtain, side curtains, stern curtain, soft top boot	Tonneau bow cover
Mooring cover	Fishing package: trolling motor, fish finder
Cockpit cover	Ski tow pylon
Clarion stereo cassette with 4 speakers	Convenience package: depth sounder, hour meter

ENGINE OPTIONS

OMC Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom	135 hp Mercury or Mariner*
115 hp Mercury or Mariner*	150 hp Mercury or Mariner*
	120 hp Force*
	<i>*(Engine will be shipped with boat from factory; boat will be pre-rigged with Mercury/Mariner or Force parts same as OMC Pre-Rig)</i>

COLOR OPTIONS

Evergreen/White	Ocean Blue/White	Spectra Red/White
-----------------	------------------	-------------------

GS 180 SKI & FISH

PERFORMANCE DATA

ENGINE 90 EVINRUDE — PROP 13 1/4 X 17

RPM	MPH	GPH	RANGE*
2500	15	2.9	88
3400	25	4.2	102
4600	35	6.3	95
WOT	38-40	—	—
0-20 MPH Acceleration — 3.3 sec.			

ENGINE 115 EVINRUDE — PROP 12 3/4 X 21

RPM	MPH	GPH	RANGE*
2500	15	3.6	71
3300	25	4.6	92
4700	35	7.2	83
WOT	42-44	—	—
0-20 MPH Acceleration — 3.2 sec.			

ENGINE 135 MERCURY (V6) — PROP 13 1/4 X 21 S/S LASER

RPM	MPH	GPH	RANGE*
2400	15	4.2	71
3000	25	5.1	87
4000	35	7.1	87
WOT	46-49	—	—
0-20 MPH Acceleration — 3.1 sec.			

NOTE: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.
***RANGE:** Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat	\$	_____
Motor _____ H.P.		_____
Trailer		_____
Accessories		_____
T, T & L		_____
TOTAL PRICE \$		_____

GS 185 SKI & FISH

SPECIFICATIONS

LOA 18' (5.49 m.)
 Beam 69" (2.28 m.)
 Depth 43" (1.09 m.)
 Maximum Depth 53" (1.35 m.)
 Maximum Depth 28" (.72 m.)
 Cockpit with 4.3 Volvo Penta
 Approx. Wt. 1104.3 (1004 kg.)
 2232
 Draft:

Transom Width 84½" (1.9 m.)
 Transom Deadrise 20°
 LOA on Trailer 22' (6.71 m.)
 Fuel Capacity 20 gal. (75.7 L.)
 Maximum Load 1150 lbs. (518 kg.)
 Max. Persons 8 or 1150 lbs. (518 kg.)
 NMMA Certified

A. Drive Unit Up 16½" (42 cm.)
 B. Drive Unit Down 31½" (8 m.)

STANDARD FEATURES

Instrument panel includes:
 speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter and
 engine temperature gauges; plus
 switches for bilge pump, blower,
 horn, lights and accessories
 Bow panel includes: aerator switch,
 voltmeter, tilt switch, battery
 charger switch, battery selector
 switch, trolling motor plug
 switch, electric horn
 Concealed electric horn
 Bilge pump and blower
 Navigation lighting
 AM/FM stereo cassette with
 2 speakers
 Glove box
 Ski locker
 Ski tow ring
 Stainless steel bow eye and stern eyes
 6" cleats

Walk-thru curved open glass
 windshield
 Wraparound bow seats
 Bow converts to fishing deck
 2 adjustable bucket seats/2
 removable fishing seats/bench seats
 Anchor locker
 Passenger grab handle
 Molded swim platform
 Stainless steel boarding ladder
 Convertible stern sundeck/fishing
 platform
 Soft top with concealed storage
 Gelcoat accent stripes
 Aerated livewell
 Trolling motor mount
 Trolling motor battery trays
 Rod holders
 Tackle box trays
 Merc/Volvo prop

OPTIONS

Canvas package: tonneau bow cover,
 walk-thru curtain, side curtains,
 stern curtain, soft top boot
 Mooring cover
 Cockpit cover
 Tonneau bow cover
 Convenience package: depth
 sounder, hour meter

Fishing package: trolling motor,
 fish finder
 High altitude prop
 Stainless steel prop (Merc. only)
 Clarion stereo cassette with
 4 speakers

ENGINE OPTIONS

3.0LX MerCruiser (WOPS)
 3.0LX MerCruiser (WPS)
 4.3LX MerCruiser
 4.3LX Bravo III MerCruiser

3.0 GS Volvo Penta (WOPS)
 3.0 GS Volvo Penta (WPS)
 4.3 GS Volvo Penta
 4.3 Gi DP Volvo Penta

COLOR OPTIONS

Evergreen/White

Ocean Blue/White

Spectra Red/White

GS 185 SKI & FISH

PERFORMANCE DATA

ENGINE 3.0LX MERCURISER — PROP 13¼ X 21 AL			
RPM	MPH	GPH	RANGE*
2100	15	2.5	102
2900	25	3.5	121
3500	35	7.4	80
WOT	42-45	—	—
0-20 MPH Acceleration — 3.4 sec.			

ENGINE 4.3LX MERCURISER — PROP 13¼ X 21 AL			
RPM	MPH	GPH	RANGE*
2200	15	2.6	99
2900	25	3.8	112
3400	35	7.4	80
WOT	48-51	—	—
0-20 MPH Acceleration — 3.3 sec.			

ENGINE 3.0 GS VOLVO PENTA — PROP 15 X 17 AL			
RPM	MPH	GPH	RANGE*
2000	10	2.1	81
3000	20	3.2	106
4000	35	7.6	78
WOT	41-43	—	—
0-20 MPH Acceleration — 3.1 sec.			

NOTE: All testing done with two persons and full tank of fuel.
 Performance results will vary depending on load, altitude, and other conditions.

*RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____
 Motor _____ H.P. _____
 Trailer _____
 Accessories _____
 T, T & L _____
TOTAL PRICE \$ _____

GS 249

SPECIFICATIONS

LOA 24'10" (7.57 m.)
 Beam 102" (2.59 m.)
 Depth 80½" (2.04 m.)
 Maximum Depth 91" (2.31 m.)
 Cockpit Depth 35" (.89 m.)
 Approx. Wt. w/5.7 MerCruiser
 4385 lbs. (1973 kg.)
 Draft: A. Drive Unit Up 17" (.43 m.)
 B. Drive Unit Down 35" (.89 m.)

Transom Width 98½" (2.50 m.)
 Transom Deadrise 20°
 LOA on Trailer N/A
 Fuel Capacity 56 gal. (211.7 L.)
 Maximum Load 2240 lbs. (1008 kg.)
 Max. Persons 16 or 2240 lbs. (1008 kg.)
 NMMMA Certified

STANDARD FEATURES

Instrument panel includes:
 speedometer, tachometer, trim, fuel,
 oil pressure, voltmeter and engine
 temperature gauges; plus switches
 for bilge pump, blower, navigation/
 anchor lights, panel lights, interior
 lights and horn; hour meter and
 depth sounder

Horn
 Automatic bilge pump and blower
 Compass
 AM/FM stereo cassette with 4 speakers
 Welded bow and stern rails
 Bow pulpit with roller and bow rope
 locker
 Stainless steel bow eye and stern eyes
 Stainless steel cleats
 Complete walkaround deck
 Curved full glass windshield
 Translucent deck hatch

18-gallon water tank
 Main cabin includes: enclosed head
 with 6-gallon porta-pottie, fiberglass
 shower stall, hanging clothes
 locker, cabin table, cabin courtesy
 lights, ice box, alcohol stove, and
 on-demand water faucet

Molded swim platform
 Stainless steel boarding ladder
 Bimini top
 Gelcoat accent stripes
 Merc/Volvo controls
 Tilt steering
 Vented port and mid-cabin windows
 Cockpit area includes: Deluxe captain's
 chair, L-shaped passenger seating
 with convertible aft seat, stern
 storage compartment and
 walk-through transom with gate
 Merc/Volvo prop

OPTIONS

Hydraulic trim tabs
 Galley package: microwave oven,
 12V/110 refrigerator, alcohol/ elec-
 tric stove, 110 dockside power, hot
 water heater
 Snap-in carpet
 Dual battery switch
 Manual china head with pump-out
 Transom shower
 Starboard windshield wiper

Camper canvas package
 Canvas package for bimini top: side,
 aft, clear connector
 Cockpit cover
 High altitude prop
 Merc/Volvo high altitude prop
 Stainless steel prop (Merc only)
 Cockpit table
 Clarion stereo cassette with 4 speakers
 Clarion stereo CD player with 4 speakers

ENGINE OPTIONS

5.7L MerCruiser
 5.7LX MerCruiser
 5.7LX Bravo III MerCruiser
 5.7LX EFI MerCruiser
 7.4L MerCruiser
 7.4L Bravo III MerCruiser

5.0 FL Volvo Penta
 5.7 FL Volvo Penta
 5.8 FL Volvo Penta
 5.8 FS Volvo Penta
 7.4 Gi DP Volvo Penta
 7.4 GL DP Volvo Penta

STANDARD COLOR

Evergreen/White Ocean Blue/White Spectra Red/White

GS 249

PERFORMANCE DATA

ENGINE 5.8 FL VOLVO PENTA — PROP 15 X 17 AL

RPM	MPH	GPH	RANGE*
2500	15	N/A	N/A
3400	25	N/A	N/A
4600	35	N/A	N/A
WOT	38-41	—	—
0-20 MPH Acceleration — 3.6 sec.			

ENGINE 7.4L MERCURUISER — PROP 23 MIRAGE

RPM	MPH	GPH	RANGE*
2500	15	N/A	N/A
3300	25	N/A	N/A
4700	35	N/A	N/A
WOT	42-46	—	—
0-20 MPH Acceleration — 2.3 sec.			

NOTE: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.
***RANGE:** Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

GS 205 ANNIVERSARY EDITION

SPECIFICATIONS

LOA 19'11" (6.07 m.)	Transom Width 88½" (2.25 m.)
Beam 93½" (2.37 m.)	Transom Deadrise 20°
Depth 45½" (1.16 m.)	LOA on Trailer 22' (6.41 m.)
Maximum Depth 56½" (1.44 m.)	Fuel Capacity 34 gal. (128.69 L.)
Cockpit Depth 31½" (.81 m.)	Maximum Load 1450 lbs. (652.5 kg.)
Approx. Wt. w/5.0 FL Volvo Penta	Max. Persons 10 or 1450 lbs. (652.5 kg.)
2499 lbs. (1125 kg.)	NMMA Certified
Draft:	A. Drive Unit Up 16½" (.42 m.)
	B. Drive Unit Down 31½" (.8 m.)

STANDARD FEATURES

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights and accessories	Wraparound bow seats Bow and stern rails Anchor locker Passenger grab handle Deluxe Sport Interior: adjustable buckets, stern bench, sundeck
Concealed electric horn Bilge pump and blower Navigation lighting Clarion AM/FM stereo cassette with 4 speakers	Molded swim platform Stainless steel boarding ladder Color-coordinated soft top with concealed storage
Power antenna Glove box Carpeted ski locker Ski tow ring Stainless steel bow eye and stern eyes 6" cleats Walk-thru curved full glass windshield	Merc/Volvo prop Merc/Volvo controls Tilt steering Depth sounder Hour meter Deluxe sport graphics Electric telescopic stern light Bow filler cushions with table

OPTIONS

Color-coordinated canvas package: tonneau bow cover, walk-thru curtain, side curtains, stern curtain, soft top boot Mooring cover	Clarion stereo CD player with 4 speakers Color-coordinated cockpit cover Color-coordinated tonneau bow cover High altitude prop Stainless steel prop (Merc. only)
---	---

ENGINE OPTIONS

5.7L MerCruiser	5.0 FL Volvo Penta
5.7LX MerCruiser	5.0 Fi Volvo Penta
5.7LX Bravo III MerCruiser	5.8 FL Volvo Penta
5.7LX EFI MerCruiser	5.7 Gi Volvo Penta

COLOR OPTIONS

Plum/White

GS 205 ANNIVERSARY EDITION

PERFORMANCE DATA

ENGINE 5.7L MERCUISER — PROP 14 X 15 AL				RANGE*
RPM	MPH	GPH		
2200	15	N/A		N/A
2800	25	N/A		N/A
3500	35	N/A		N/A
WOT	53-57	—		—
0-20 MPH Acceleration — 3.3 sec.				

NOTE: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*RANGE: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

SALE PRICE

Boat	\$ _____
Motor _____ H.P.	_____
Trailer	_____
Accessories	_____
T, T & L	_____
TOTAL PRICE \$	_____

STERNDRIVE ENGINE INFORMATION

The following pages contain data about sterndrives offered in our 1996 product.

MODEL:
 Horsepower at Prop Shaft 135 hp/101 kw.
 Cylinders 4
 Cubic Inches 181
 Compression Ratio 9.3:1
 Max. Recommended RPM 4400-4800
 Lower Unit Gear Ratio 1.94:1
 Tilt Power
 Trim Power
 Length 33 3/4"
 Width 22 1/8"
 Height 19 1/8" (above crankshaft CL)
 28 3/4" (overall)
 625 lbs. (pkg. weight)

MODEL:
 Horsepower at Prop Shaft 135 hp/101 kw.
 Cylinders 4
 Cubic Inches 181
 Compression Ratio 9.3:1
 Max. Recommended RPM 4400-4800
 Lower Unit Gear Ratio 1.94:1
 Tilt Power
 Trim Power
 Length 33 3/4"
 Width 22 1/8"
 Height 19 1/8" (above crankshaft CL)
 28 3/4" (overall)
 625 lbs. (pkg. weight)

MODEL:
 Horsepower at Prop Shaft 180 hp/134 kw.
 Cylinders 6
 Cubic Inches 262
 Compression Ratio 9.4:1
 Max. Recommended RPM 4400-4800
 Lower Unit Gear Ratio 1.84:1
 Tilt Power
 Trim Power
 Length 31 1/8"
 Width 29"
 Height 20 1/2" (above crankshaft CL)
 802 lbs. (pkg. weight)

MODEL:
 Horsepower at Prop Shaft 180 hp/134 kw.
 Cylinders 6
 Cubic Inches 262
 Compression Ratio 9.4:1
 Max. Recommended RPM 4400-4800
 Lower Unit Gear Ratio 2.43:1
 Tilt Power
 Trim Power
 Length 29"
 Width 29"
 Height 21" (above crankshaft CL)
 896 lbs. (pkg. weight)

MODEL:
 Horsepower at Prop Shaft 210 hp/156 kw.
 Cylinders 8
 Cubic Inches 350
 Compression Ratio 9.1:1
 Max. Recommended RPM 4400-4800
 Lower Unit Gear Ratio 1.47:1
 Tilt Power
 Trim Power
 Length 36 3/4"
 Width 28 1/2"
 Height 20" (above crankshaft CL)
 27 3/4" (overall)
 907 lbs. (pkg. weight)

MODEL:
 Horsepower at Prop Shaft 250 hp/186 kw.
 Cylinders 8
 Cubic Inches 350
 Compression Ratio 9.1:1
 Max. Recommended RPM 4400-4800
 Lower Unit Gear Ratio 1.47:1
 Tilt Power
 Trim Power
 Length 34"
 Width 29"
 Height 21" (above crankshaft at CL)
 938 lbs. (pkg. weight)

MODEL:
 Horsepower at Prop Shaft 250 hp/186 kw.
 Cylinders 8
 Cubic Inches 350
 Compression Ratio 9.1:1
 Max. Recommended RPM 4400-4800
 Lower Unit Gear Ratio 2.0:1
 Tilt Power
 Trim Power
 Length 34"
 Width 29"
 Height 21" (above crankshaft at CL)
 994 lbs. (pkg. weight)

MODEL:
 Horsepower at Prop Shaft 250 hp/186 kw.
 Cylinders 8
 Cubic Inches 350
 Compression Ratio 9.1:1
 Max. Recommended RPM 4400-4800
 Lower Unit Gear Ratio 1.50:1
 Tilt Power
 Trim Power
 Length 33"
 Width 29"
 Height 22" (above crankshaft at CL)
 966 lbs. (pkg. weight)

7.4L MERCURISER*
 w/Power Steering
 300 hp/224 kw.
 8
 454
 8.0:1
 4200-4600
 1.50:1
 Power
 Power
 39"
 32"
 20 1/8" (above crankshaft CL)
 1,125 lbs. (pkg. weight)

7.4L BRAVO III MERCURISER
 300 hp/224 kw.
 8
 454
 8.0:1
 4200-4600
 2.0:1
 Power
 Power
 39"
 32"
 23" (above crankshaft CL)
 1,125 lbs. (pkg. weight)

3.0 GS VOLVO PENTA
 130 hp/96 kw.
 4
 181
 9.3:1
 4600
 1.85:1
 Power
 Power
 35 1/2"
 24 1/2"
 19 1/2" (above crankshaft CL)
 696 lbs. (pkg. weight)

4.3 GS VOLVO PENTA
 185 hp/139 kw.
 6
 262
 9.3:1
 4800
 1.85:1
 Power
 Power
 31 1/2"
 29 1/2"
 20 1/2" (above crankshaft at CL)
 880 lbs. (pkg. weight)

MODEL:
 Horsepower at Prop Shaft
 Cylinders
 Cubic Inches
 Compression Ratio
 Max. Recommended RPM
 Lower Unit Gear Ratio
 Tilt
 Trim
 Length
 Width
 Height
 Weight

MODEL:
 Horsepower at Prop Shaft
 Cylinders
 Cubic Inches
 Compression Ratio
 Max. Recommended RPM
 Lower Unit Gear Ratio
 Tilt
 Trim
 Length
 Width
 Height
 Weight

MODEL:
 Horsepower at Prop Shaft
 Cylinders
 Cubic Inches
 Compression Ratio
 Max. Recommended RPM
 Lower Unit Gear Ratio
 Tilt
 Trim
 Length
 Width
 Height
 Weight

MODEL:
 Horsepower at Prop Shaft
 Cylinders
 Cubic Inches
 Compression Ratio
 Max. Recommended RPM
 Lower Unit Gear Ratio
 Tilt
 Trim
 Length
 Width
 Height
 Weight

4.3 Gi DP VOLVO PENTA
 180 hp/134 kw.
 6
 262
 9.3:1
 4800
 2.30:1
 Power
 Power
 31 1/2"
 31"
 20 1/8" (above crankshaft CL)
 890 lbs. (pkg. weight)

5.0 FL VOLVO PENTA
 190 hp/142 kw.
 8
 302
 8.4:1
 4400
 1.66:1
 Power
 Power
 37 1/2"
 28"
 20 1/8" (above crankshaft CL)
 955 lbs. (pkg. weight)

5.0 FI VOLVO PENTA
 220 hp/164 kw.
 8
 302
 8.5:1
 4600
 1.66:1
 Power
 Power
 37 1/2"
 28 1/2"
 20 1/8" (above crankshaft CL)
 980 lbs. (pkg. weight)

5.7 GI VOLVO PENTA
 250 hp/186 kw.
 8
 350
 8.1:1
 4600
 1.51:1
 Power
 Power
 38 1/2"
 28 1/2"
 20 1/8" (above crankshaft CL)
 991 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.8 FL VOLVO PENTA
235 hp/175 kw.
8
351
8.3:1
4400
1.51:1
Power
Power
37%*
29%*
20 1/2" (above crankshaft CL)
1000 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.8 FSi VOLVO PENTA
265 hp/197 kw.
8
351
8.8:1
4600
1.51:1
Power
Power
37%*
30%*
22" (above crankshaft CL)
1054 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

7.4 GL DP VOLVO PENTA
300 hp/224 kw.
8
454
8.0:1
4600
1.78:1
Power
Power
40%*
31%*
21 1/2" (above crankshaft CL)
1200 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

7.4 Gi DP VOLVO PENTA
330 hp/246 kw.
8
454
8.6:1
1202
1.68:1
Power
Power
40%*
31%*
21 1/2" (above crankshaft CL)
1202 lbs. (pkg. weight)

GLASTRON[®]

700 West River Road • Little Falls, MN 56345