


GLASTRON 1997

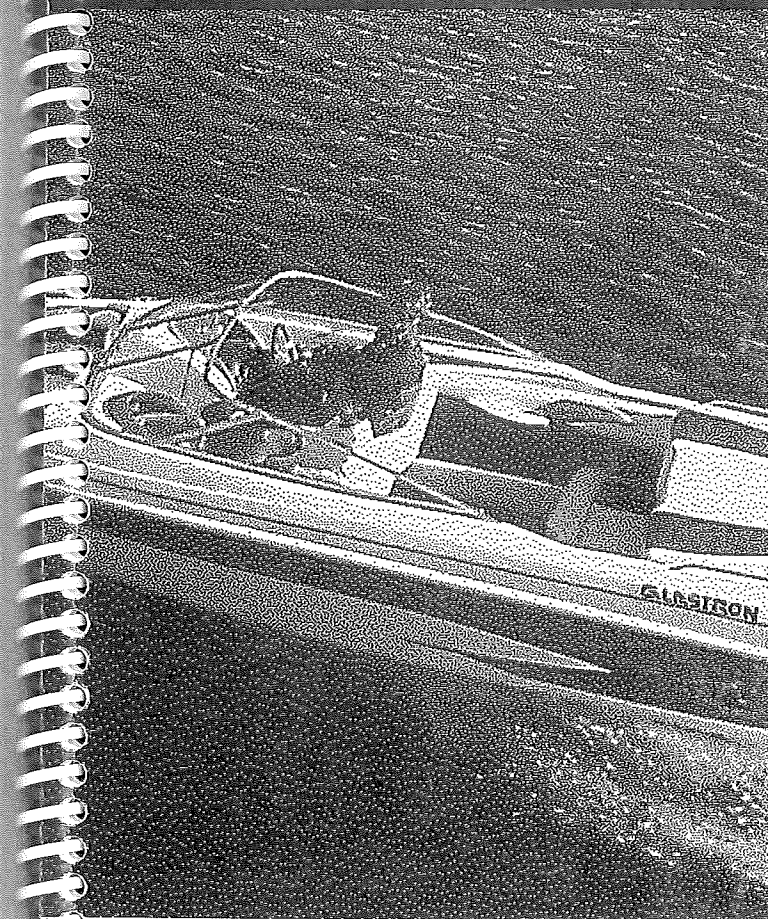

*Product Specification  
Manual*

**GLASTRON®**

*Runabouts Done Right*

[TABLE OF CONTENTS]

Introduction ..... 2

Key Selling Points ..... 4

Features and Benefits ..... 6

Glastron Limited Warranty ..... 8

Definitions of Boat Measurements ..... 10

1997 Glastron Model Line-Up ..... 11

1997 Glastron Model Specifications ..... 12

Sterndrive Engine Information ..... 48

Seating Options ..... 53

Canvas Options ..... 54

Runabouts Done Right™ captures the whole essence of how we at Glastron approach boatbuilding.

For starters, we specialize in runabouts. Because the way we see it, if you want to be really good at something, you need to focus. And our focus just happens to be runabouts. That's what it was in the beginning for Glastron. That's what it has been for over forty years now. And that's what it will be in years to come.

Runabouts Done Right means designing every Glastron model with our distinctive, progressive styling. It means incorporating the conveniences and innovations that today's boaters have come to expect from us. And it means putting boats on the water that will outperform virtually every other brand.

Runabouts Done Right. That's what we do here at Glastron. Better than anyone, we believe.



A GENMAR COMPANY

In many ways, Glastron designers have a tougher job than other boat designers. Yet every year, our boats get better. Better acceleration. Better planing times. Better top speeds. Better turning agility. And better fuel economy. Not just better than other Glastrons, but better than other runabouts in test after test by some of the industry's most respected authorities.

How do we get better? By constantly asking ourselves, "Will it improve performance?" The positioning of the running strakes. The location of the fuel tank. The height of the outdrive. We never take any of it for granted. We never just settle for a good, cosmetic look. It has to make the boat perform better or we go back to the drawing board.


The result of all this obsessing over design? After dozens of awards from dozens of experts, Glastron again in 1996 took top honors from Powerboat magazine for Best Runabout Performance.

## [ FIVE REASONS WHY OUR RUNABOUTS ARE DONE RIGHT. ]

Make sure your customer knows these five facts.


### 1.] Our award-winning SSV hull design.

It's our most unique feature. Until other boatbuilders top our hull design, they'll never top our performance.




### 2.] Our BiTex® hull construction.

Most boats are constructed with traditional woven roving fiberglass. Not ours. Every Glastron is made with BiTex® knitted fiberglass, a material usually found only in boats costing much more. The result: a 75% higher fiber-to-resin ratio, greater strength, reduced weight and an improved finish.




The woven roving fiberglass that's used on most boats is loose and porous, resulting in a low fiber-to-resin ratio.



BiTex fibers are tightly knitted and run in three directions, yielding a 75% higher fiber-to-resin ratio.

### 3.] Our rotocast components.


They fit better, weigh less and they're virtually indestructible. They're also easier to clean.




### 4.] Our fiberglass stringer system.

Every model from 16 to 22 feet is built with our innovative stringer system that's made entirely of foam-filled fiberglass. It's lighter, stronger and four

times wider than conventional wood stringers. And unlike wood, it'll never rot.



Still used by many runabout manufacturers, traditional wood stringers can be a primary source of wood rot in a boat.



Glastron's innovative foam-filled fiberglass stringer system is bigger, stronger and impervious to moisture.

### 5.] Our unmatched warranty.

This is the ultimate indication of how well our boats are built: a five-year limited warranty on the hull and two years on all other components.\*



\* Propulsion warranties vary by manufacturer.

# FEATURES & BENEFITS

**(BEFORE YOUR CUSTOMERS  
MAKE A CHOICE—  
SHOULDN'T THEY ALSO COMPARE  
THESE FEATURES AND BENEFITS?)**

## FEATURES:

1. Stringer system is bonded to hull with fiberglass
2. Hull and deck joined with stainless steel screws, not pop rivets
3. Fiberglass molded bow liner bolted to floor
4. Keel areas are overlapped with fiberglass
5. Floor is resin-coated, top to bottom
6. Hull construction includes BiTex® knitted fiberglass.
7. All deck fittings are backed by under-deck supports glassed into the deck
8. Motor mounts are fiber-glass encapsulated to the hull
9. Aircraft locknuts on bolts
10. Marine-grade carpet—one piece lock looped

## BENEFITS:

- Rigid stringer system for strength
- Better seal; much stronger boat overall
- Eliminates wood rot problem; better appearance; stronger
- Double strength in this all-important area
- Protects against wood rot
- Strongest, lightest and most durable lamination fabric available.
- Strength; durability
- Strength; reduces engine vibration
- Strength; long term durability
- Appearance; no seams

[6]

## FEATURES:

11. Marine-grade vinyl
12. Carpeted storage areas
13. Carpeted ski locker with drain in sub-floor
14. Kneeboard size ski locker
15. Tilt steering wheel standard on most models
16. All models feature automotive-style instrument panel
17. Built-in swim platform with stainless steel boarding ladder below platform
18. Each new model is carefully designed for the proper weight to horsepower ratio
19. Choice of MerCruiser or Volvo Penta power
20. Choice of OMC or Mercury Marine Pre-Rig on all outboards

## BENEFITS:

- UV protected; marine-grade stitching
- Appearance; padding for boating gear
- Protects the ski; lets water drain away from the stringer system
- Convenient storage for today's water sports
- More comfortable steering
- Easy-to-read gauges, convenient controls, improved styling
- Ease of boarding; lower platform than most competition
- Complete design concentration on performance; better planing time; better fuel economy
- Better choices for each type of boat use
- Factory controls and gauges for complete package

There are many more facts and features that have allowed Glastron to be recognized as an industry leader in innovation and safety. Make sure your customers know why Glastrons are...

**RUNABOUTS DONE RIGHT.™**

[7]

# GLASTRON LIMITED WARRANTY

Glastron Boats, a division of Larson/Glastron Boats, Inc., a subsidiary of Genmar Industries, Inc. ("Manufacturer") warrants to the first retail purchaser ("buyer") of the products it manufactures, under the name Glastron Boats, which are purchased from a factory authorized dealer; that should the hull be proven to be structurally defective in material or workmanship under normal operating conditions: Manufacturer will make the structural repairs (or, at its sole discretion, replace the affected part) necessitated thereby for a period of five (5) years from the date the product was purchased by the buyer. Manufacturer also warrants to the buyer to repair (or replace at its sole discretion) non-structural defects in material and workmanship under normal operating conditions subject to the exclusions set forth below for a period of two (2) years. This limited warranty is subject to the following terms and conditions.

If not demanded already, Manufacturer demands that the buyer examine the product to discover any defects in material or workmanship and notify Manufacturer or the selling dealer of same. During the warranty period, warranty repairs will be made without charge by the selling dealer, at the dealer's store or service facility or, at Manufacturer's election, by Manufacturer at its factory. Transportation to and from a Dealership or to Manufacturer's factory shall be at buyer's expense. Manufacturer's election to repair the defective product or replace the defective part is the exclusive remedy of the buyer and is a condition precedent to any legal or equitable action against Manufacturer. Any action for breach of warranty relating to a product must be brought within a period of sixty (60) days following Manufacturer's failure to repair the product or replace the defective part.

## WHAT IS NOT COVERED:

This Warranty does not cover:

1. A product which has been repaired or altered without authorization of Manufacturer by persons other than Manufacturer or an authorized Dealer or altered in any way so as to effect its use and operation;
2. Engines, outdrives, controls, propellers, batteries or other equipment or accessories which are not manufactured by Manufacturer whether or not warranted by such other manufacturers;
3. Gelcoat finishes, cracking, crazing, blistering including osmotic blistering;
4. Windshield breakage;
5. Leakage around windshields, hatches or other apertures;
6. A product which has been subjected to unreasonable use, tampering, abuse, mishandling, improper maintenance, negligence, improper trailer, alteration, accident, or used for racing or commercial purposes, or which has been operated contrary to any printed instructions furnished by Manufacturer;
7. A product which has been overpowered according to the maximum recommended engine horsepower specified on the capacity plate affixed thereto;

[8]

8. Any representations relating to the speed of the product or weight;
9. Loss of time, inconvenience, travel expense, loss of use, haul out, launch, towing, storage charges or other matters not specifically covered hereunder;
10. Dealer preparation, cleaning and final adjustments and alignments in preparing boat for delivery or commissioning;
11. Any act of God.

This warranty gives you specific rights, and you may also have other rights which vary from state to state. This warranty is governed by the laws of the State of Minnesota. This document contains the entire warranty given by Manufacturer and there are no terms, promises, conditions or warranties other than those contained herein. No oral or written information or advice given by Manufacturer, its dealers, representatives, agents or employees shall create a warranty or in any way increase the scope of this warranty. Manufacturer does not authorize any person to extend the time of this warranty or to create or assume for it any other obligation or liability with respect to its products. No person, including a dealer, is authorized to make any repairs or replacements under this warranty without the prior written approval of Manufacturer. Manufacturer reserves the right to improve its products through changes in design, material or parts without being obligated to incorporate such changes in products previously manufactured. This warranty is not transferable or assignable.

**THIS EXPRESS WARRANTY IS IN LIEU OF, AND MANUFACTURER DISCLAIMS, ANY AND ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, WHATSOEVER INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES UNDER THE UNIFORM COMMERCIAL CODE, ANY IMPLIED WARRANTY OF MERCHANTABILITY AND ANY IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, THIS WARRANTY SHALL BE THE SOLE AND EXCLUSIVE REMEDY OF ANY PERSON WHETHER IN CONTRACT, TORT OR OTHERWISE AND MANUFACTURER SHALL NOT BE LIABLE FOR CONSEQUENTIAL, SPECIAL OR INCIDENTAL DAMAGE, LOST PROFITS, INCONVENIENCE, OR DAMAGE RESULTING FROM A BREACH OF THE EXPRESS OR ANY IMPLIED WARRANTY WHICH IS NOT DISCLAIMED HEREIN NOR ANY OTHER LOSS OR DAMAGE, EXCEPT AS SET FORTH ABOVE.**

In the event that the disclaimer and exclusion of warranties and damages are inconsistent with applicable law, those disclaimers and exclusions are limited to the maximum permitted by applicable law, and all remaining implied obligations and warranties are limited in duration to a period of two (2) years or such shorter period as permitted by applicable law.

Some states do not allow limitations on implied warranties, or the exclusion or limitation of incidental or consequential damages, so the limitations or exclusions may not apply to you.

[9]

**Length Overall (LOA)** — Distance along the centerline from the tip of the bow to the aft-most part of the hull.

**Maximum Beam** — Maximum width of the boat.

**Transom Width** — Maximum width of the boat at transom.

**Depth** — Vertical distance from lowest point of the keel to the highest point of the boat, excluding windshields, lights and other removable components.

**Transom** — Vertical distance at boat's centerline from the keel/transom intersection to the transom top.

**Maximum Depth** — Vertical distance from lowest point of the keel to the highest point of boat, including windshields.

**Cockpit Depth** — Vertical distance from boat floor to top of gunwale as measured at the driver's seat.

**Length Overall on Trailer** — Distance measured along the boat centerline, from forward-most point of trailer to aft-most point of motor/outdrive.

**Boat Height on Trailer** — Vertical distance from ground to highest point of boat, including windshield.

**Draft (Drive unit up)** — Total number of inches of boat and/or motor and drive unit below the waterline. Measured unloaded, with the motor/drive unit in the full up position.

**Draft (Drive unit down)** — Total number of inches of boat and/or motor and drive unit below the waterline. Measured unloaded, with the motor/drive unit in the full down position.

#### SPECIAL EDITIONS

SE 170  
SE 175  
SE 177  
SE 195  
SE 199  
SE 175 SKI & FISH

#### OUTBOARDS

GS 160  
GS 180

#### STERNDRIVE RUNABOUTS

GS 185  
GS 187  
GS 205  
GS 225  
GS 235

#### SKI & FISH

GS 180 SKI & FISH  
GS 185 SKI & FISH  
GS 205 SKI & FISH

#### SPORT CRUISERS

GS 209  
GS 229  
GS 249

#### MODEL DESIGNATOR CODE

0 — Outboard Model  
5 — Open Bow Sterndrive Model  
7 — Closed Bow Sterndrive Model  
9 — Cuddy Cabin Sterndrive Model

**[SPECIFICATIONS]**

LOA 17' 1" (5.21 m.)  
 Beam 88" (2.24 m.)  
 Depth 43" (1.09 m.)  
 Maximum Depth 59" (1.5 m.)  
 Cockpit Depth 28½" (.72 m.)  
 Approx. Wt. 1125 lbs. (506 kg.)  
 Transom Width 73¼" (1.86 m.)  
 Transom Deadrise 21°  
 Draft: A. Drive Unit Up 15½" (.39 m.)  
 B. Drive Unit Down 28½" (.72 m.)

**[STANDARD FEATURES]**

Instrument panel includes: speedometer, tachometer; and fuel gauges; plus switches for bilge pump, navigation/anchor light, panel lights, horn, and accessories  
 Electric horn  
 Bilge pump  
 Navigation lighting  
 AM/FM stereo cassette with 2 speakers  
 Glove box  
 Ski locker

Stainless steel bow eye and stern eyes  
 6" cleats  
 Walk-thru curved full glass windshield  
 Wraparound bow seats  
 Bow storage drawers  
 Anchor locker  
 Passenger grab handle  
 Adjustable bucket/bench seating  
 Molded swim platform  
 Stainless steel boarding ladder  
 Soft top with concealed storage and boot

**[OPTIONS]**

Canvas package; tonneau bow cover, walk-thru curtain, side curtains, stern curtain  
 Mooring cover  
 Cockpit cover  
 Tonneau bow cover  
 Clarion stereo cassette M8430 with 2 speakers

Automatic bilge pump  
 Dual cable steering  
 Ski tow pylon  
 Convenience Package: hour meter, depth sounder  
 Tilt steering

**[ENGINE OPTIONS]**

OMC and Mercury Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom, OMC Systems check-OMC only

90 hp Mercury or Mariner\*  
 115 Mercury or Mariner\*  
 135 hp Mercury or Mariner\*  
 90 hp Force\*  
 120 hp Force\*  
 \*(Engine will be shipped from Mercury Marine)

**[COLOR OPTIONS]**

Indigo Blue/Beige Boston Green/Beige

**[PERFORMANCE DATA]**

**Engine 90 Evinrude — Prop 13¼ x 17**

RPM	MPH	GPH	RANGE*
2500	15	2.9	88
3400	25	4.2	102
4600	35	6.3	95
WOT	38-40	—	—

0-20 MPH Acceleration 3.3 — sec.

**Engine 115 Evinrude — Prop 12½ x 21**

RPM	MPH	GPH	RANGE*
2500	15	3.6	71
3300	25	4.6	92
4700	35	7.2	83
WOT	42-44	—	—

0-20 MPH Acceleration — 3.2 sec.

**Engine 130 Johnson — Prop 14¼ x 21**

RPM	MPH	GPH	RANGE*
2100	15	3.5	73
3300	25	4.4	97
4000	35	6.9	87
WOT	45-46	—	—

0-20 MPH Acceleration — 3.2 sec.

**Engine 135 Mercury (V6) — Prop 13¼ x 21 S/S Laser**

RPM	MPH	GPH	RANGE*
2400	15	4.2	71
3000	25	5.1	87
4000	35	7.1	82
WOT	45-48	—	—

0-20 MPH Acceleration — 3.1 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.  
 \*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

**[SALE PRICE]**

Boat \$ \_\_\_\_\_

Motor \_\_\_\_\_ H.P. \_\_\_\_\_

Trailer \_\_\_\_\_

Accessories \_\_\_\_\_

T,T & L \_\_\_\_\_

**TOTAL PRICE \$** \_\_\_\_\_



**[SPECIFICATIONS]**

LOA 17' 1" (5.21 m.)  
 Beam 88" (2.24 m.)  
 Depth 43" (1.09 m.)  
 Maximum Depth 59" (1.5 m.)  
 Cockpit Depth 28½" (.72 m.)  
 Approx. Wt. w/3.0 GS Volvo  
 Penta 1650 lbs. (743 kg.)  
 Transom Width 73¼" (1.86 m.)  
 Draft: A. Drive Unit Up 16" (.41 m.)  
 B. Drive Unit Down 31" (.79 m.)

Transom Deadrise 21°  
 LOA on Trailer 21' 6" (6.55 m.)  
 Fuel Capacity 20 gal. (75.7 L.)  
 Maximum Load 1250 lbs.  
 (563 kg.)  
 Max. Person 8 or 1150 lbs.  
 (518 kg.)  
 NMMA Certified

**[STANDARD FEATURES]**

Instrument panel includes:  
 speedometer, tachometer,  
 trim, fuel, oil pressure, volt-  
 meter and engine tempera-  
 ture gauges; plus switches for  
 bilge pump, blower, horn,  
 lights, and accessories  
 Electric horn  
 Bilge pump and blower  
 Navigation lighting  
 AM/FM stereo cassette with  
 2 speakers  
 Glove box  
 Ski locker  
 Ski tow ring

Stainless steel bow eye and  
 stern eye  
 6" cleats  
 Walk-thru curved full glass  
 windshield  
 Wraparound bow seats  
 Bow storage drawers  
 Anchor locker  
 Passenger grab handle  
 Fold-out sleeper seats with aft  
 jump seats  
 Molded swim platform  
 Stainless steel boarding ladder  
 Soft top with concealed storage  
 and boot  
 Merc/Volvo prop

**[OPTIONS]**

Canvas package: tonneau bow  
 cover, walk-thru curtain, side  
 curtains, stern curtain  
 Mooring cover  
 Cockpit cover  
 Tonneau bow cover  
 Clarion stereo cassette M8430  
 with 2 speakers

Automatic bilge pump  
 High altitude prop  
 Convenience Package: hour  
 meter, depth sounder  
 SL Seating: 2 bucket seats, aft  
 bench seating, sun lounge  
 Tilt steering

**[ENGINE OPTIONS]**

3.0LX MerCruiser (WOPS)  
 3.0LX MerCruiser (WPS)  
 4.3LX Gen+ MerCruiser

3.0 GS Volvo Penta (WOPS)  
 3.0 GS Volvo Penta (WPS)  
 4.3 GL Volvo Penta

**[COLOR OPTIONS]**

Indigo Blue/Beige

Boston Green/Beige

**[PERFORMANCE DATA]**

**Engine 3.0LX MerCruiser — Prop 13¼ x 21 AL**

RPM	MPH	GPH	RANGE*
2100	15	2.5	102
2900	25	3.5	121
3500	35	7.4	80
WOT	42-45	—	—

0-20 MPH Acceleration — 3.4 sec.

**Engine 3.0 GS Volvo Penta — Prop 15 x 17**

RPM	MPH	GPH	RANGE*
2000	10	2.1	81
3000	20	3.2	106
4000	35	7.6	78
WOT	41-43	—	—

0-20 MPH Acceleration — 3.7 sec.

**Engine 4.3 GL Volvo Penta — Prop 14 x 21 AL**

RPM	MPH	GPH	RANGE*
2400	15	3.0	90
3200	25	4.0	112
3700	35	7.9	77
WOT	46-48	—	—

0-20 MPH Acceleration — 3.2 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.  
 \*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

**[SALE PRICE]**

Boat \$ \_\_\_\_\_

Motor \_\_\_\_\_ H.P. \_\_\_\_\_

Trailer \_\_\_\_\_

Accessories \_\_\_\_\_

T, T & L \_\_\_\_\_

**TOTAL PRICE \$** \_\_\_\_\_

**[SPECIFICATIONS]**

LOA 17' 1" (5.21 m.)  
 Beam 88" (2.24 m.)  
 Depth 43" (1.09 m.)  
 Maximum Depth 59" (1.5 m.)  
 Cockpit Depth 28½" (.72 m)  
 Approx. Wt. w/3.0 GS Volvo  
 Penta 1650 lbs. (743 kg.)  
 Transom Width 73¼" (1.86 m.)  
 Draft: A. Drive Unit Up 16" (.41 m.)  
 B. Drive Unit Down 31" (.79 m.)

Transom Deadrise 21°  
 LOA on Trailer 21' 6" (6.55 m.)  
 Fuel Capacity 20 gal. (75.7 L.)  
 Maximum Load 1250 lbs. (563 kg.)  
 Max. Person 8 or 1150 lbs.  
 (518 kg.)  
 NMMA Certified

**[STANDARD FEATURES]**

Instrument panel includes:  
 speedometer, tachometer,  
 trim, fuel, oil pressure, volt-  
 meter and engine tempera-  
 ture gauges; plus switches for  
 bilge pump, blower, horn,  
 lights, and accessories

Electric horn  
 Bilge pump and blower  
 Navigation lighting  
 AM/FM stereo cassette with  
 2 speakers  
 Glove box  
 Ski locker  
 Ski tow ring

Stainless steel bow eye and  
 stern eyes  
 6" cleats  
 Walk-thru curved full glass  
 windshield  
 Anchor locker  
 Passenger grab handle  
 Two bucket seats/aft bench  
 seating/sun lounge  
 Molded swim platform  
 Stainless steel boarding ladder  
 Soft top with concealed storage  
 and boot  
 Merc/Volvo prop

**[OPTIONS]**

Canvas package: side curtains,  
 stern curtain  
 Mooring cover  
 Cockpit cover  
 Clarion stereo cassette M8430  
 with 2 speakers

Tilt steering  
 Automatic bilge pump  
 Bow pad  
 High altitude prop  
 Convenience Package: hour  
 meter, depth sounder

**[ENGINE OPTIONS]**

3.0LX MerCruiser (WOPS)  
 3.0LX MerCruiser (WPS)  
 4.3LX Gen+ MerCruiser

3.0 GS Volvo Penta (WOPS)  
 3.0 GS Volvo Penta (WPS)  
 4.3 GL Volvo Penta

**[COLOR OPTIONS]**

Indigo Blue/Beige

Boston Green/Beige

**[PERFORMANCE DATA]**

**Engine 3.0LX MerCruiser — Prop 13¼ x 21 AL**

RPM	MPH	GPH	RANGE*
2100	15	2.5	102
2900	25	3.5	121
3500	35	7.4	80
WOT	42-45	—	—

0-20 MPH Acceleration — 3.4 sec.

**Engine 3.0 GS Volvo Penta — Prop 15 x 17**

RPM	MPH	GPH	RANGE*
2000	10	2.1	81
3000	20	3.2	106
4000	35	7.6	78
WOT	41-43	—	—

0-20 MPH Acceleration — 3.7 sec.

**Engine 4.3 GL Volvo Penta — Prop 14 x 21 AL**

RPM	MPH	GPH	RANGE*
2400	15	3.0	90
3200	25	4.0	112
3700	35	7.9	77
WOT	46-48	—	—

0-20 MPH Acceleration — 3.2 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

\*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

**[SALE PRICE]**

Boat \$ \_\_\_\_\_

Motor \_\_\_\_\_ H.P. \_\_\_\_\_

Trailer \_\_\_\_\_

Accessories \_\_\_\_\_

T, T & L \_\_\_\_\_

**TOTAL PRICE \$** \_\_\_\_\_

**[SPECIFICATIONS]**

LOA 18' 7" (5.66 m.)  
 Beam 90 1/2" (2.31 m.)  
 Depth 47" (1.19 m.)  
 Maximum Depth 63" (1.6 m.)  
 Cockpit Depth 28 1/2" (.73 m.)  
 Approx. Wt. w/4.3LX GEN+ MerCruiser 2000 lbs. (900 kg.)  
 Transom Width 75" (1.9 m.)  
 Draft: A. Drive Unit Up 16 1/2" (.42 m.)  
 B. Drive Unit Down 31 1/2" (.8 m.)

Transom Deadrise 21°  
 LOA on Trailer 22' (6.71 m.)  
 Fuel Capacity 35 gal. (132.5 L.)  
 Maximum Load 1500 lbs. (675 kg.)  
 Max. Person 10 or 1410 lbs. (635 kg.)  
 NMMA Certified

**[STANDARD FEATURES]**

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, volt-meter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories  
 Electric horn  
 Bilge pump and blower  
 Navigation lighting  
 AM/FM stereo cassette with 2 speakers  
 Glove box  
 Ski locker  
 Ski tow ring

Stainless steel bow eye and stern eyes  
 6" cleats  
 Walk-thru curved full glass windshield  
 Wraparound bow seats  
 Bow storage drawers  
 Anchor locker  
 Passenger grab handle  
 Adjustable fold-out sleeper seats with aft jump seats  
 Molded swim platform  
 Stainless steel boarding ladder  
 Soft top with concealed storage and boot  
 Merc/Volvo prop

**[OPTIONS]**

Canvas package: tonneau bow cover, walk-thru curtain, side curtains, stern curtain  
 Mooring cover  
 Cockpit cover  
 Tonneau bow cover  
 Clarion stereo cassette M8430 with 2 speakers

Automatic bilge pump  
 High altitude prop  
 Convenience Package: hour meter, depth sounder  
 SL Seating: 2 bucket seats/aft bench seat/sun lounge  
 Tilt steering

**[ENGINE OPTIONS]**

3.0LX MerCruiser (WOPS)  
 3.0LX MerCruiser (WPS)  
 4.3LX Gen+ MerCruiser  
 5.7L MerCruiser

3.0 GS Volvo Penta (WOPS)  
 3.0 GS Volvo Penta (WPS)  
 4.3 GL Volvo Penta  
 5.7 GL Volvo Penta

**[COLOR OPTIONS]**

Indigo Blue/Beige  
 Boston Green/Beige

**[PERFORMANCE DATA]**

**Engine 4.3LX Gen+ MerCruiser — Prop 13 1/4 x 21 AL**

RPM	MPH	GPH	RANGE*
2400	15	3.0	160
3200	25	4.0	202
3700	35	7.9	141
WOT	47-49	—	—

0-20 MPH Acceleration — 3.3 sec.

**Engine 5.7L MerCruiser — Prop 13 1/4 x 21 AL**

RPM	MPH	GPH	RANGE*
2200	15	3.3	144
2800	25	4.3	186
3500	35	8.0	141
WOT	53-57	—	—

0-20 MPH Acceleration — 3.1 sec.

**Engine 3.0 GS Volvo Penta — Prop 15 x 17 AL**

RPM	MPH	GPH	RANGE*
2300	15	2.8	179
3000	25	3.8	211
3800	35	7.8	144
WOT	42-44	—	—

0-20 MPH Acceleration — 3.7 sec.

**Engine 4.3 GL Volvo Penta — Prop 15 X 17 AL**

RPM	MPH	GPH	RANGE*
2000	15	2.8	161
3000	25	3.8	197
4000	35	6.9	152
WOT	45-47	—	—

0-20 MPH Acceleration — 3.2 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.  
 \*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

**[SALE PRICE]**

Boat \$ \_\_\_\_\_

Motor \_\_\_\_\_ H.P. \_\_\_\_\_

Trailer \_\_\_\_\_

Accessories \_\_\_\_\_

T, T & L \_\_\_\_\_

**TOTAL PRICE \$** \_\_\_\_\_

**[SPECIFICATIONS]**

LOA 18' 7" (5.66 m.)  
 Beam 90 1/2" (2.31 m.)  
 Depth 53" (1.34 m.)  
 Maximum Depth 69" (1.75 m.)  
 Cockpit Depth 35" (.89 m.)  
 Approx. Wt. w/4.3LX Gen+  
 MerCruiser 2000 lbs. (900 kg.)  
 Transom Width 75" (1.9 m.)  
 Draft: A. Drive Unit Up 16 1/2" (.42 m.)  
 B. Drive Unit Down 31 1/2" (.8 m.)

Transom Deadrise 21°  
 LOA on Trailer 22' (6.71 m.)  
 Fuel Capacity 35 gal. (132.5 L.)  
 Maximum Load 1500 lbs. (675 kg.)  
 Max. Person 8 or 1150 lbs.  
 (635 kg.)  
 NMMA Certified

**[STANDARD FEATURES]**

Instrument panel includes:  
 speedometer, tachometer,  
 trim, fuel, oil pressure, volt-  
 meter and engine tempera-  
 ture gauges; plus switches for  
 bilge pump, blower, horn,  
 lights, and accessories

Electric horn  
 Automatic bilge pump  
 Blower  
 Navigation lighting  
 AM/FM stereo cassette with  
 2 speakers  
 Ski tow ring

Stainless steel bow eye and  
 stern eyes  
 6" cleats  
 Passenger grab handle  
 Starboard bucket seat/port  
 sleeper seat w/aft jump seats  
 Molded swim platform  
 Lockable cabin door  
 Cabin light  
 Forward V-berth  
 Forward deck hatch  
 Stainless steel boarding ladder  
 Soft top with concealed storage  
 and boot  
 Merc/Volvo prop

**[OPTIONS]**

Canvas package: side curtains,  
 stern curtain  
 Mooring cover  
 Cockpit cover  
 Clarion Stereo cassette M8430  
 with 2 speakers

Tilt steering  
 High altitude prop  
 Convenience Package: hour  
 meter, depth sounder  
 SL Seating: 2 bucket seats/aft  
 bench seat/sun lounge

**[ENGINE OPTIONS]**

3.0LX MerCruiser (WOPS)  
 3.0LX MerCruiser (WPS)  
 4.3LX Gen+ MerCruiser  
 5.7L MerCruiser

3.0 GS Volvo Penta (WOPS)  
 3.0 GS Volvo Penta (WPS)  
 4.3 GL Volvo Penta  
 5.7 GL Volvo Penta

**[COLOR OPTIONS]**

Indigo Blue/Beige  
 Boston Green/Beige

**[PERFORMANCE DATA]**

**Engine 4.3LX Gen+ MerCruiser — Prop 13 1/4 x 21 AL**

RPM	MPH	GPH	RANGE*
2400	15	3.0	160
3200	25	4.0	202
3700	35	7.9	141
WOT	47-49	—	—

0-20 MPH Acceleration — 3.4 sec.

**Engine 5.7L MerCruiser — Prop 13 1/4 x 21 AL**

RPM	MPH	GPH	RANGE*
2200	15	3.3	144
2800	25	4.3	186
3500	35	8.0	141
WOT	53-57	—	—

0-20 MPH Acceleration — 3.3 sec.

**Engine 3.0 GS Volvo Penta — Prop 15 x 17 AL**

RPM	MPH	GPH	RANGE*
2300	15	2.8	179
3000	25	3.8	211
3800	35	7.8	144
WOT	42-44	—	—

0-20 MPH Acceleration — 3.8 sec.

**Engine 4.3 GL Volvo Penta — Prop 15 X 17 AL**

RPM	MPH	GPH	RANGE*
2000	15	2.8	161
3000	25	3.8	197
4000	35	6.9	152
WOT	45-47	—	—

0-20 MPH Acceleration — 3.5 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.  
 \*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

**[SALE PRICE]**

Boat \$ \_\_\_\_\_

Motor \_\_\_\_\_ H.P. \_\_\_\_\_

Trailer \_\_\_\_\_

Accessories \_\_\_\_\_

T, T & L \_\_\_\_\_

**TOTAL PRICE \$** \_\_\_\_\_

[SPECIFICATIONS]

LOA 17' 1" (5.21 m.)  
 Beam 88" (2.24 m.)  
 Depth 43" (1.09 m.)  
 Maximum Depth 59" (1.5 m.)  
 Cockpit Depth 28½" (.72 m.)  
 Approx. Wt. w/3.0LX MerCruiser  
 1750 lbs. (788 kg.)  
 Transom Width 73¼" (1.86 m.)  
 Draft: A. Drive Unit Up 16" (.41 m.)  
 B. Drive Unit Down 31" (.79 m.)

Transom Deadrise 21°  
 LOA on Trailer 21' 6" (6.55 m.)  
 Fuel Capacity 20 gal. (75.7 L.)  
 Maximum Load 1250 lbs. (538 kg.)  
 Max. Person 8 or 1150 lbs.  
 (518 kg.)  
 NMMA Certified

[STANDARD FEATURES]

Instrument panel includes:  
 speedometer, tachometer,  
 trim, fuel, oil pressure, volt-  
 meter and engine tempera-  
 ture gauges; plus switches for  
 bilge pump, blower, horn,  
 lights, and accessories  
 Bow panel includes: aerator  
 switch, voltmeter, tilt switch,  
 battery charger switch,  
 battery selector switch,  
 trolling motor plug  
 Electric horn  
 Bilge pump and blower  
 Navigation lighting  
 AM/FM stereo cassette with  
 2 speakers  
 Glove box  
 Ski locker  
 Ski tow ring  
 Stainless steel bow eye and  
 stern eyes

6" cleats  
 Walk-thru curved open glass  
 windshield  
 Wraparound bow seats  
 Bow converts to fishing deck  
 2 adjustable bucket seats/  
 2 removable fishing  
 seats/bench seat  
 Anchor locker  
 Passenger grab handle  
 Molded swim platform  
 Stainless steel boarding ladder  
 Convertible stern  
 sundeck/fishing platform  
 Soft top with concealed storage  
 and boat  
 Aerated livewell  
 Trolling motor mount  
 Trolling motor battery trays  
 Rod holder  
 Tackle box trays  
 Merc/Volvo prop

[OPTIONS]

Canvas package: tonneau bow  
 cover, walk-thru curtain, side  
 curtains, stern curtain  
 Mooring cover  
 Cockpit cover  
 Tonneau bow cover  
 Clarion stereo cassette M8430  
 with 2 speakers

Automatic bilge pump  
 Fishing package: trolling motor,  
 fish finder  
 High altitude prop  
 Convenience Package: hour  
 meter, depth sounder  
 Tilt steering

[ENGINE OPTIONS]

3.0LX MerCruiser (WOPS)  
 3.0LX MerCruiser (WPS)  
 4.3LX Gen+ MerCruiser

3.0 GS Volvo Penta (WOPS)  
 3.0 GS Volvo Penta (WPS)  
 4.3 GL Volvo Penta

[COLOR OPTIONS]

Indigo Blue/Beige

Boston Green/Beige

[PERFORMANCE DATA]

Engine 3.0LX MerCruiser — Prop 13¼ x 21 AL

RPM	MPH	GPH	RANGE*
2100	15	2.5	102
2900	25	3.5	121
3500	35	7.4	80
WOT	42-45	—	—

0-20 MPH Acceleration — 3.4 sec.

Engine 3.0 GS Volvo Penta — Prop 15 x 17

RPM	MPH	GPH	RANGE*
2000	10	2.1	81
3000	20	3.2	106
4000	35	7.6	78
WOT	41-43	—	—

0-20 MPH Acceleration — 3.7 sec.

Engine 4.3 GL Volvo Penta — Prop 14 x 21 AL

RPM	MPH	GPH	RANGE*
2400	15	3.0	90
3200	25	4.0	112
3700	35	7.9	77
WOT	46-48	—	—

0-20 MPH Acceleration — 3.2 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

\*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

[SALE PRICE]

Boat \$ \_\_\_\_\_

Motor \_\_\_\_\_ H.P. \_\_\_\_\_

Trailer \_\_\_\_\_

Accessories \_\_\_\_\_

T, T & L \_\_\_\_\_

TOTAL PRICE \$ \_\_\_\_\_

**[SPECIFICATIONS]**

LOA 15' 11½" (4.86 m.)  
 Beam 84" (2.13 m.)  
 Depth 37" (.94 m.)  
 Maximum Depth 42" (1.07 m.)  
 Cockpit Depth 24" (.61 m.)  
 Approx. Wt. 1050 lbs. (473 kg.)  
 Transom Width 82" (2.08 m.)  
 Transom Deadrise 13°  
 Draft: A. Drive Unit Up 15½" (.39 m.)  
       B. Drive Unit Down 28½" (.72 m.)

**[STANDARD FEATURES]**

Instrument panel includes:  
 speedometer, tachometer, fuel  
 and trim gauges; plus switches  
 for bilge pump, navigation/  
 anchor lights, panel lights,  
 horn, and accessories

Electric horn  
 Bilge pump  
 Navigation lighting  
 AM/FM stereo cassette with  
 2 speakers  
 Glove box

Ski/kneeboard locker  
 Stainless steel bow eye and  
 stern eyes  
 4" cleats  
 Smoked plex windscreen  
 Wraparound bow seats  
 Bow storage  
 Passenger grab handle  
 Bucket/bench seating  
 Molded swim platform  
 Stainless steel boarding ladder  
 Rear ski storage rack

**[OPTIONS]**

Mooring cover  
 Dual cable steering  
 Clarion stereo M8430 with  
 2 speakers

Ski tow pylon  
 Automatic bilge pump  
 Skiff windshield

**[ENGINE OPTIONS]**

OMC and Mercury Pre-Rig  
 includes: ignition switch with  
 ignition interrupt switch,  
 speedometer, tachometer, trim  
 gauge, fuel gauge, voltmeter,  
 manufacturer controls, pre-  
 drilled transom, OMC Systems  
 check-OMC only

75 hp Mercury or Mariner\*  
 90 hp Mercury or Mariner\*  
 115 hp Mercury or Mariner\*  
 75 hp Force\*  
 90 hp Force\*  
 120 hp Force\*  
 \* (Engine will be shipped from Mercury  
 Marine)

**[COLOR OPTIONS]**

Delta Blue/White    Imperial Plum/White    Island Teal/White

**[PERFORMANCE DATA]**

**Engine 90 Evinrude — Prop 13¼ x 17**

RPM	MPH	GPH	RANGE*
2500	15	2.5	86
3400	25	4.0	90
4600	35	6.0	84
WOT	42-44	—	—

0-20 MPH Acceleration — 3.3 sec.

**Engine 115 Evinrude — Prop 12¼ x 21**

RPM	MPH	GPH	RANGE*
2500	15	3.4	63
3300	25	4.3	84
4700	35	7.0	72
WOT	46-48	—	—

0-20 MPH Acceleration — 3.2 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

\*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

**[SALE PRICE]**

Boat \$ \_\_\_\_\_

Motor \_\_\_\_\_ H.P. \_\_\_\_\_

Trailer \_\_\_\_\_

Accessories \_\_\_\_\_

T, T & L \_\_\_\_\_

**TOTAL PRICE \$** \_\_\_\_\_

**[SPECIFICATIONS]**

LOA 17' 10 1/2" (5.46 m.)  
 Beam 89 1/2" (2.28 m.)  
 Depth 43" (1.09 m.)  
 Maximum Depth 53" (1.35 m.)  
 Cockpit Depth 28 1/2" (.72 m.)  
 Approx. Wt. 1300 lbs. (585 kg.)  
 Transom Width 84 1/2" (2.15 m.)  
 Transom Deadrise 20°

LOA on Trailer 22' (6.71 m.)  
 Fuel Capacity 20 gal. (75.7 L.)  
 Maximum Load 1798 lbs. (809 kg.)  
 Max. Person 8 or 1150 lbs.  
 (518 kg.)  
 Maximum Horsepower 150  
 NMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.)  
 B. Drive Unit Down 29" (.74 m.)

**[STANDARD FEATURES]**

Instrument panel includes:  
 speedometer, tachometer, fuel  
 and trim gauges; plus switches  
 for bilge pump, navigation/  
 anchor lights, panel lights,  
 horn, and accessories  
 Electric horn  
 Navigation lighting  
 AM/FM stereo cassette with  
 2 speakers  
 Glove box  
 Ski locker  
 Tilt steering  
 Dual cable steering  
 Bilge pump

Stainless steel bow eye and  
 stern eyes  
 6" cleats  
 Walk-thru curved full glass  
 windshield  
 Wraparound hinged bow seats  
 w/storage  
 Anchor locker  
 Passenger grab handle  
 Adjustable buckets/bench seating  
 Molded swim platform  
 Stainless steel boarding ladder  
 Soft top with concealed storage  
 and boot  
 Gelcoat accent stripes

**[OPTIONS]**

Canvas package: tonneau bow  
 cover, walk-thru curtain, side  
 curtains, stern curtain  
 Mooring cover  
 Tonneau bow cover  
 Cockpit cover  
 Clarion stereo cassette M8430  
 with 2 speakers  
 Clarion stereo cassette M3170  
 with 4 speakers

Clarion stereo CD M4275 with  
 4 speakers  
 Ski tow pylon  
 Convenience package: hour  
 meter, depth sounder  
 Power antenna  
 Telescopic stern light  
 Automatic bilge pump  
 Bow filler cushion with table

**[ENGINE OPTIONS]**

OMC and Mercury Pre-Rig  
 includes: ignition switch with  
 ignition interrupt switch,  
 speedometer, tachometer, trim  
 gauge, fuel gauge, voltmeter,  
 manufacturer controls, pre-  
 drilled transom, OMC Systems  
 check—OMC only

115 hp Mercury or Mariner\*  
 135 hp Mercury or Mariner\*  
 150 hp Mercury or Mariner\*  
 120 hp Force\*  
 \*(Engine will be shipped from Mercury  
 Marine)

**[COLOR OPTIONS]**

Delta Blue/White    Imperial Plum/White    Island Teal/White

**[PERFORMANCE DATA]**

**Engine 90 Evinrude — Prop 13 1/4 x 17**

RPM	MPH	GPH	RANGE*
2500	15	2.9	88
3400	25	4.2	102
4600	35	6.3	95
WOT	38-40	—	—

0-20 MPH Acceleration — 3.3 sec.

**Engine 115 Evinrude — Prop 12 3/4 x 21**

RPM	MPH	GPH	RANGE*
2500	15	3.6	71
3300	25	4.6	92
4700	35	7.2	83
WOT	42-44	—	—

0-20 MPH Acceleration — 3.2 sec.

**Engine 135 Mercury (V6) — Prop 13 1/2 x 21 S/S Laser**

RPM	MPH	GPH	RANGE*
2400	15	4.2	64
3000	25	5.1	88
4000	35	7.1	86
WOT	46-49	—	—

0-20 MPH Acceleration — 3.1 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

\*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

**[SALE PRICE]**

Boat \$ \_\_\_\_\_

Motor \_\_\_\_\_ H.P. \_\_\_\_\_

Trailer \_\_\_\_\_

Accessories \_\_\_\_\_

T, T & L \_\_\_\_\_

**TOTAL PRICE \$** \_\_\_\_\_

**[SPECIFICATIONS]**

LOA 18' (5.49 m.)  
 Beam 89½" (2.28 m.)  
 Depth 43" (1.09 m.)  
 Maximum Depth 53" (1.35 m.)  
 Cockpit Depth 28¾" (.72 m.)  
 Approx. Wt. w/4.3 GL Volvo  
 Penta 2100 lbs. (945 kg.)  
 Transom Width 84½" (2.15 m.)  
 Draft: A. Drive Unit Up 16" (.41 m.)  
 B. Drive Unit Down 31" (.79 m.)

Transom Deadrise 20°  
 LOA on Trailer 21' 6" (6.55 m.)  
 Fuel Capacity 20 gal. (75.7 L.)  
 Maximum Load 1150 lbs. (518 kg.)  
 Max. Person 8 or 1150 lbs.  
 (518 kg.)  
 NMMA Certified

**[STANDARD FEATURES]**

Instrument panel includes:  
 speedometer, tachometer,  
 trim, fuel, oil pressure, volt-  
 meter and engine tempera-  
 ture gauges; plus switches for  
 bilge pump, blower, horn,  
 lights, and accessories

Electric horn  
 Navigation lighting  
 AM/FM stereo cassette with  
 2 speakers  
 Glove box  
 Ski tow ring  
 Ski locker  
 Stainless steel bow eye and  
 stern eyes  
 Bilge pump and blower

Tilt steering  
 6" cleats  
 Wraparound hinged bow seats  
 w/storage  
 Walk-thru curved full glass  
 windshield  
 Anchor locker  
 Passenger grab handle  
 Adjustable fold-out sleeper  
 seats with aft jump seats  
 Molded swim platform  
 Stainless steel boarding ladder  
 Soft top with concealed storage  
 and boot  
 Gelcoat accent stripes  
 Merc/Volvo controls  
 Merc/Volvo prop

**[OPTIONS]**

Canvas package: tonneau bow  
 cover, walk-thru curtain, side  
 curtains, stern curtain  
 Mooring cover  
 Cockpit cover  
 Tonneau bow cover  
 High altitude prop  
 Clarion stereo cassette M8430  
 with 2 speakers  
 Clarion stereo cassette M3170  
 with 4 speakers  
 Clarion stereo CD M4275 with  
 4 speakers  
 Automatic bilge pump

SL Seating: 2 bucket seats/aft  
 bench seating/sun lounge  
 Adjustable starboard  
 bucket/port sleeper seating/aft  
 jump seats  
 Bow filler cushion with table  
 Convenience package: hour  
 meter, depth sounder  
 Rail package: stainless steel  
 bow and stern rails, stainless  
 steel grab handles  
 Power antenna  
 Telescopic stern light

**[ENGINE OPTIONS]**

3.0LX MerCruiser (WOPS)      3.0 GS Volvo Penta (WOPS)  
 3.0LX MerCruiser (WPS)      3.0 GS Volvo Penta (WPS)  
 4.3LX Gen+ MerCruiser      4.3 GL Volvo Penta

**[COLOR OPTIONS]**

Delta Blue/White      Imperial Plum/White      Island Teal/White

**[PERFORMANCE DATA]**

**Engine 3.0LX MerCruiser — Prop 13¼ x 21 AL**

RPM	MPH	GPH	RANGE*
2100	15	2.5	102
2900	25	3.5	121
3500	35	7.4	85
WOT	42-45	—	—

0-20 MPH Acceleration — 3.4 sec.

**Engine 3.0 GS Volvo Penta — Prop 15 x 17 AL**

RPM	MPH	GPH	RANGE*
2000	10	2.1	81
3000	20	3.2	106
4000	35	7.6	82
WOT	41-43	—	—

0-20 MPH Acceleration — 3.7 sec.

**Engine 4.3 GL Volvo Penta — Prop 14 x 19 AL**

RPM	MPH	GPH	RANGE*
2200	15	3.0	90
2900	25	4.0	113
3400	35	7.9	80
WOT	47-49	—	—

0-20 MPH Acceleration — 3.2 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.  
 \*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

**[SALE PRICE]**

Boat \$ \_\_\_\_\_

Motor \_\_\_\_\_ H.P. \_\_\_\_\_

Trailer \_\_\_\_\_

Accessories \_\_\_\_\_

T, T & L \_\_\_\_\_

TOTAL PRICE \$ \_\_\_\_\_



**[SPECIFICATIONS]**

LOA 18' (5.49 m.)  
 Beam 89½" (2.28 m.)  
 Depth 43" (1.09 m.)  
 Maximum Depth 53" (1.35 m.)  
 Cockpit Depth 28½" (.72 m.)  
 Approx. Wt. w/4.3 GL Volvo  
 Penta 2100 lbs. (945 kg.)  
 Transom Width 84½" (2.15 m.)  
 Draft: A. Drive Unit Up 16" (.41 m.)  
 B. Drive Unit Down 31" (.79 m.)

Transom Deadrise 20°  
 LOA on Trailer 21' 6" (6.55 m.)  
 Fuel Capacity 20 gal. (75.7 L.)  
 Maximum Load 1150 lbs.  
 (518 kg.)  
 Max. Person 8 or 1150 lbs.  
 (518 kg.)  
 NMMA Certified

**[STANDARD FEATURES]**

Instrument panel includes:  
 speedometer, tachometer,  
 trim, fuel, oil pressure, volt-  
 meter and engine tempera-  
 ture gauges; plus switches for  
 bilge pump, blower, horn,  
 lights, and accessories

Electric horn  
 Navigation lighting  
 AM/FM stereo cassette with  
 2 speakers  
 Glove box  
 Ski locker  
 Ski tow ring  
 Stainless steel bow eye and  
 stern eyes

Bilge pump and blower  
 Tilt steering  
 6" cleats  
 Walk-thru curved full glass  
 windshield  
 Bow access step  
 Passenger grab handle  
 Molded swim platform  
 Stainless steel boarding ladder  
 Soft top with concealed storage  
 and boot  
 Gelcoat accent stripes  
 Merc/Volvo controls  
 SL Seating: 2 bucket seats/aft  
 bench seating/sun lounge  
 Merc/Volvo prop

**[OPTIONS]**

Canvas package: side curtains,  
 stern curtain  
 Mooring cover  
 Cockpit cover  
 Clarion stereo cassette M8430  
 with 2 speakers  
 Clarion stereo cassette M3170  
 with 4 speakers  
 Clarion Stereo CD M4275 with  
 4 speakers

Automatic bilge pump  
 High altitude prop  
 Bow pad  
 Convenience package: hour  
 meter, depth sounder  
 Rail package: stainless steel bow  
 and stern rails, stainless steel  
 grab handles  
 Power antenna  
 Telescopic stern light

**[ENGINE OPTIONS]**

3.0LX MerCruiser (WOPS)  
 3.0LX MerCruiser (WPS)  
 4.3LX Gen+ MerCruiser

3.0 GS Volvo Penta (WOPS)  
 3.0 GS Volvo Penta (WPS)  
 4.3 GL Volvo Penta

**[COLOR OPTIONS]**

Delta Blue/White    Imperial Plum/White    Island Teal/White

**[PERFORMANCE DATA]**

**Engine 3.0LX MerCruiser — Prop 13¼ x 21 AL**

RPM	MPH	GPH	RANGE*
2100	15	2.5	102
2900	25	3.5	121
3500	35	7.4	85
WOT	42-45	—	—

0-20 MPH Acceleration — 3.4 sec.

**Engine 3.0 GS Volvo Penta — Prop 15 x 17 AL**

RPM	MPH	GPH	RANGE*
2000	10	2.1	81
3000	20	3.2	106
4000	35	7.6	82
WOT	41-43	—	—

0-20 MPH Acceleration — 3.7 sec.

**Engine 4.36 GL Volvo Penta — Prop 14 x 19 AL**

RPM	MPH	GPH	RANGE*
2200	15	3.0	90
2900	25	4.0	113
3400	35	7.9	80
WOT	47-49	—	—

0-20 MPH Acceleration — 3.2 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.  
 \*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

**[SALE PRICE]**

Boat \$ \_\_\_\_\_

Motor \_\_\_\_\_ H.P. \_\_\_\_\_

Trailer \_\_\_\_\_

Accessories \_\_\_\_\_

T, T & L \_\_\_\_\_

**TOTAL PRICE \$ \_\_\_\_\_**

**[SPECIFICATIONS]**

LOA 19' 11" (6.07 m.)  
 Beam 93½" (2.37 m.)  
 Depth 45¼" (1.16 m.)  
 Maximum Depth 56½" (1.4 m.)  
 Cockpit Depth 31¼" (.81 m.)  
 Approx. Wt. w/5.7 GL Volvo  
 Penta 2499 lbs. (1125 kg.)  
 Transom Width 88½" (2.25 m.)

Draft: A. Drive Unit Up 16¼" (.42 m.)  
 B. Drive Unit Down 31½" (.8 m.)

**[STANDARD FEATURES]**

Instrument panel includes:  
 speedometer, tachometer,  
 trim, fuel, oil pressure, volt-  
 meter and engine tempera-  
 ture gauges; plus switches for  
 bilge pump, blower, horn,  
 lights, and accessories  
 Electric horn  
 AM/FM stereo cassette with  
 2 speakers  
 Glove box  
 Ski locker  
 Ski tow ring  
 Stainless steel bow eye and  
 stern eyes  
 6" cleats

Transom Deadrise 20°  
 LOA on Trailer 24' 8" (7.52 m.)  
 Fuel Capacity 34 gal. (128.69 L.)  
 Maximum Load 1450 lbs. (655 kg.)  
 Max. Person 10 or 1450 lbs.  
 (655 kg.)  
 NMMA Certified

Walk-thru curved full glass  
 windshield  
 Bilge pump and blower  
 Wraparound bow seats  
 Hinged bow seats/storage  
 Anchor locker  
 Passenger grab handle  
 Adjustable fold-out sleeper  
 seats with aft jump seats  
 Molded swim platform  
 Stainless steel boarding ladder  
 Soft top with concealed storage  
 and boot  
 Gelcoat accent stripes  
 Merc/Volvo controls  
 Tilt steering  
 Merc/Volvo prop

**[OPTIONS]**

Canvas package: tonneau bow  
 cover, walk-thru curtain, side  
 curtains, stern curtain  
 Mooring cover  
 Cockpit cover  
 Tonneau bow cover  
 High altitude prop  
 Clarion stereo cassette M8430  
 with 2 speakers  
 Clarion stereo cassette M3170  
 with 4 speakers  
 Clarion stereo CD M4275 with  
 4 speakers  
 Stainless steel prop (Merc. only)

Automatic bilge pump  
 SL Seating: 2 bucket seats/aft  
 bench seating/sun lounge  
 Adjustable starboard  
 bucket/port sleeper seating/aft  
 jump seats  
 Bow filler cushion with table  
 Convenience package: hour  
 meter, depth sounder  
 Rail package: Stainless steel  
 bow and stern rails, stainless  
 steel grab handles  
 Power antenna  
 Telescopic stern light

**[ENGINE OPTIONS]**

4.3LX Gen+ MerCruiser	5.7LX Bravo III	5.7 GL Volvo Penta
4.3LX Gen+ Bravo III	5.7LX EFI MerCruiser	5.7 GLi Volvo Penta
5.7L MerCruiser	4.3 GL Volvo Penta	5.7 GS Volvo Penta
5.7L EFI MerCruiser	4.3 GL DP Volvo Penta	5.7 GS DP Volvo Penta
5.7LX MerCruiser	4.3 Gi DP Volvo Penta	5.7 GSi Volvo Penta

**[COLOR OPTIONS]**

Delta Blue/White    Imperial Plum/White    Island Teal/White

**[PERFORMANCE DATA]**

Engine 4.3LX Gen+ MerCruiser — Prop 13¼ x 21 AL

RPM	MPH	GPH	RANGE*
2400	15	3.0	160
3200	25	4.0	202
3700	35	7.9	141
WOT	46-48	—	—

0-20 MPH Acceleration — 3.3 sec.

Engine 4.3 GL Volvo Penta — Prop 14 x 19 AL

RPM	MPH	GPH	RANGE*
2000	15	2.8	161
3000	25	3.8	197
4000	35	6.9	152
WOT	45-47	—	—

0-20 MPH Acceleration — 3.4 sec.

Engine 5.7L MerCruiser — Prop 14 x 19 AL

RPM	MPH	GPH	RANGE*
2200	15	3.3	144
2800	25	4.3	186
3500	35	8.0	141
WOT	54-56	—	—

0-20 MPH Acceleration — 3.1 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

\*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

**[SALE PRICE]**

Boat \$ \_\_\_\_\_

Motor \_\_\_\_\_ H.P. \_\_\_\_\_

Trailer \_\_\_\_\_

Accessories \_\_\_\_\_

T, T & L \_\_\_\_\_

TOTAL PRICE \$ \_\_\_\_\_

**[SPECIFICATIONS]**

LOA 22' (6.71 m.)  
 Beam 10 1/4" (2.58 m.)  
 Depth 48" (1.22 m.)  
 Maximum Depth 60" (1.52 m.)  
 Cockpit Depth 34" (.86 m.)  
 Approx. Wt. w/5.7L MerCruiser 3300 lb. (1485 kg.)  
 Transom Width 95 1/2" (29.18 m.)  
 Draft: A. Drive Unit Up 17 1/2" (.44 m.)  
 B. Drive Unit Down 33" (.84 m.)

Transom Deadrise 20°  
 LOA on Trailer 25' 10" (7.87 m.)  
 Fuel Capacity 47 gal. (177.9 L.)  
 Maximum Load 1600 lbs. (720 kg.)  
 Max Person 11 or 1551 lbs. (698 kg.)  
 NMMA Certified

**[STANDARD FEATURES]**

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, volt-meter and engine temperature gauges; plus switches for bilge pump, blower, navigation/anchor lights, panel lights, interior lights and horn; hour meter and depth sounder

Electric horn  
 Navigation lighting  
 Clarion stereo cassette M8430 with 4 speakers  
 Lockable glove box  
 Ski locker  
 Ski tow ring  
 Stainless steel bow eye and stern eyes  
 6" cleats  
 Bilge pump and blower

Walk-thru curved full glass windshield  
 Wraparound bow seats  
 Hinged bow seats/storage  
 Anchor locker  
 Passenger grab handle  
 SL Seating: bucket seats/aft bench seating  
 Molded swim platform  
 Stainless steel boarding ladder  
 Soft top with concealed storage and boot  
 Gelcoat accent stripes  
 Merc/Volvo controls  
 Merc/Volvo prop  
 Tilt steering  
 Premier package: stainless steel bow and stern rails, stainless steel grab handles, power antenna, telescopic stern light

**[OPTIONS]**

Canvas package: tonneau bow cover, walk-thru curtain, side curtains, stern curtain  
 Mooring cover  
 Cockpit cover  
 Tonneau bow cover  
 Clarion stereo cassette M3170 with 4 speakers

Clarion stereo CD M4275 player with 4 speakers  
 Deluxe U-shaped cockpit seating with deluxe bucket seats  
 Bow filler cushions with table  
 Stainless steel prop (Merc. only)  
 High altitude prop  
 Automatic bilge pump  
 Snap-in carpet

**[ENGINE OPTIONS]**

5.7L MerCruiser	7.4L Bravo III	5.7 GSi Volvo Penta
5.7L EFI MerCruiser	7.4LX EFI MerCruiser	7.4 GL Volvo Penta
5.7LX MerCruiser	5.7 GL Volvo Penta	7.4 GL DP Volvo Penta
5.7LX Bravo III	5.7 GLi Volvo Penta	7.4 Gi Volvo Penta
5.7LX EFI MerCruiser	5.7 GS Volvo Penta	
7.4L MerCruiser	5.7 GS DP Volvo Penta	

**[COLOR OPTIONS]**

Delta Blue/White      Imperial Plum/White      Island Teal/White

**[PERFORMANCE DATA]**

**Engine 5.7L MerCruiser — Prop 14 x 19 al**

RPM	MPH	GPH	RANGE*
3000	28	8.9	163
3500	36	13.4	148
4000	43	16.4	110
WOT	48-50	—	—

0-20 MPH Acceleration — 3.7 sec.

**Engine 7.4L MerCruiser — Prop 23 Mirage**

RPM	MPH	GPH	RANGE*
3000	32	10.5	154
3500	38	14.2	139
4000	44	20.5	108
WOT	58-60	—	—

0-20 MPH Acceleration — 3.3 sec.

**Engine 5.7 GL Volvo Penta — Prop 14 1/2 x 19 AL**

RPM	MPH	GPH	RANGE*
2000	20	7.2	106
3000	30	8.6	133
4000	40	15.7	97
WOT	47-49	—	—

0-20 MPH Acceleration — 3.8 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.  
 \*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

**[SALE PRICE]**

Boat \$ \_\_\_\_\_

Motor \_\_\_\_\_ H.P. \_\_\_\_\_

Trailer \_\_\_\_\_

Accessories \_\_\_\_\_

T, T & L \_\_\_\_\_

**TOTAL PRICE \$** \_\_\_\_\_

**[SPECIFICATIONS]**

LOA 23' 3/2" (7.09 m.)  
 Beam 102" (2.59 m.)  
 Depth 64 1/2" (1.64 m.)  
 Maximum Depth 77 1/2" (1.97 m.)  
 Cockpit Depth 37" (.94 m.)  
 Approx. Wt. w/5.7L MerCruiser  
 3950 lbs. (1778 kg.)  
 Draft: A. Drive Unit Up 17" (.42 m.)  
 B. Drive Unit Down 35" (.89 m.)

Transom Width 98 1/2" (2.51 m.)  
 Transom Deadrise 20°  
 LOA on Trailer 26' 10" (8.18 m.)  
 Fuel Capacity 56 gal. (212 L.)  
 Maximum Load 2240 lbs. (1008 kg.)  
 Max. Person 16 or 2240 lbs. (1008 kg.)  
 NMMA Certified

**[STANDARD FEATURES]**

Instrument panel includes:  
 speedometer, tachometer,  
 trim, fuel, oil pressure, volt-  
 meter and engine tempera-  
 ture gauges; plus switches for  
 bilge pump, blower, naviga-  
 tion/anchor lights, panel lights,  
 interior lights and horn; hour  
 meter and depth sounder

Electric horn  
 Clarion stereo cassette M8430  
 with 4 speakers  
 Lockable glove box  
 Ski locker  
 Ski tow ring  
 Stainless steel bow eye and  
 stern eyes  
 6" cleats  
 Walk-thru curved full glass  
 windshield  
 Wraparound bow seats  
 Lockable glove box

Bow filler cushions  
 Bilge pump and blower  
 Full fiberglass cockpit liner  
 Deluxe U-shaped cockpit seating  
 with deluxe bucket seats  
 Cockpit table  
 Molded swim platform  
 Stainless steel boarding ladder  
 Bimini top with concealed  
 storage and boot  
 Gelcoat accent stripes  
 Merc/Volvo controls  
 Tilt steering  
 Port side cuddy compartment  
 with vented port window  
 Starboard side storage  
 compartment with ice box  
 Premier package: stainless steel  
 rails, stainless steel grab  
 handles, power antenna,  
 telescopic stern light  
 Merc/Volvo prop

**[OPTIONS]**

Canvas package: tonneau bow  
 cover, walk-thru curtain, side  
 curtains, aft curtain  
 Mooring cover  
 Cockpit cover  
 Tonneau bow cover  
 Camper canvas package  
 Automatic bilge pump

High altitude prop  
 Stainless steel prop (Merc. only)  
 Porta-pottie  
 Snap-in carpet  
 Clarion stereo cassette M3170  
 with 4 speakers  
 Clarion stereo CD M4275 with  
 4 speakers

**[ENGINE OPTIONS]**

5.7L MerCruiser	7.4L Bravo III	5.7 GSi Volvo Penta
5.7L EFI MerCruiser	7.4LX EFI MerCruiser	7.4 GL Volvo Penta
5.7LX MerCruiser	5.7 GL Volvo Penta	7.4 GL DP Volvo Penta
5.7LX Bravo III	5.7 GLi Volvo Penta	7.4 Gi Volvo Penta
5.7LX EFI MerCruiser	5.7 GS Volvo Penta	
7.4L MerCruiser	5.7 GS DP Volvo Penta	

**[COLOR OPTIONS]**

Delta Blue/White      Imperial Plum/White      Island Teal/White

**[PERFORMANCE DATA]**

**Engine 5.7L MerCruiser — Prop 14 x 19 AL**

RPM	MPH	GPH	RANGE*
2500	15	7.5	101
3300	25	10.9	115
4700	35	13.5	130
WOT	44-46	—	—

0-20 MPH Acceleration — 3.7 sec.

**Engine 5.7 GL Volvo Penta — Prop 14 x 17 AL**

RPM	MPH	GPH	RANGE*
2500	15	7.4	102
3400	25	10.7	118
4600	35	13.2	133
WOT	40-42	—	—

0-20 MPH Acceleration — 3.9 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.  
 \*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

**[SALE PRICE]**

Boat \$ \_\_\_\_\_

Motor \_\_\_\_\_ H.P. \_\_\_\_\_

Trailer \_\_\_\_\_

Accessories \_\_\_\_\_

T, T & L \_\_\_\_\_

**TOTAL PRICE \$** \_\_\_\_\_

**[SPECIFICATIONS]**

LOA 17' 10 1/2" (5.49 m.)	Transom Deadrise 20°
Beam 89 1/4" (2.28 m.)	LOA on Trailer 22' (6.71 m.)
Depth 43" (1.09 m.)	Fuel Capacity 20 gal. (75.7 L.)
Maximum Depth 53" (1.35 m.)	Maximum Load 1150 lbs. (518 kg.)
Cockpit Depth 28 1/4" (.72 m.)	Max. Person 8 or 1150 lbs. (518 kg.)
Approx. Wt. 1425 lbs. (641 kg.)	Maximum Horsepower 150
Transom Width 84 1/2" (2.15 m.)	NMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.)  
 B. Drive Unit Down 29" (.74 m.)

**[STANDARD FEATURES]**

Instrument panel includes: speedometer, tachometer, fuel and trim gauges; plus switches for bilge pump, navigation/ anchor lights, panel lights, horn, and accessories	Walk-thru curved open glass windshield
Bow panel includes: aerator switch, voltmeter, tilt switch, battery charger switch, battery selector switch, trolling motor plug	Bilge pump and blower Wraparound bow seats Bow converts to fishing deck 2 adjustable bucket seats/2 remo- vable fishing seats/bench seats
Electric horn	Anchor locker
Navigation lighting	Passenger grab handle
AM/FM stereo cassette with 2 speakers	Molded swim platform
Glove box	Stainless steel boarding ladder
Ski locker	Soft top with concealed storage and boot
6" cleats	Gelcoat accent stripes
Stainless steel bow eye and stern eyes	Aerated livewell
	Molded trolling motor mount
	Trolling motor battery trays
	Rod holders
	Tackle box trays
	Dual cable steering

**[OPTIONS]**

Canvas package: tonneau bow cover, walk-thru curtain, side curtains, stern curtain	Convenience package: hour meter, depth sounder
Mooring cover	Tilt steering
Cockpit cover	Clarion stereo cassette M8430 with 2 speakers
Tonneau bow cover	Clarion stereo cassette M3170 with 4 speakers
Fishing package: trolling motor, fish finder	Clarion stereo CD M4275 with 4 speakers
Ski tow pylon	Automatic bilge pump
Snap-in carpet	

**[ENGINE OPTIONS]**

OMC and Mercury Pre-Rig includes: ignition switch with ignition interrupt switch, speed- ometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre- drilled transom, OMC Systems check-OMC only	115 hp Mercury or Mariner* 135 hp Mercury or Mariner* 150 hp Mercury or Mariner* 120 hp Force* <i>*(Engine will be shipped from Mercury Marine)</i>
--	---

**[COLOR OPTIONS]**

Delta Blue/White      Imperial Plum/White      Island Teal/White

**[PERFORMANCE DATA]**

**Engine 90 Evinrude — Prop 13 1/4 x 17**

RPM	MPH	GPH	RANGE*
2500	15	2.9	88
3400	25	4.2	102
4600	35	6.3	95
WOT	38-40	—	—

0-20 MPH Acceleration — 3.3 sec.

**Engine 115 Evinrude — Prop 12 1/4 x 21**

RPM	MPH	GPH	RANGE*
2500	15	3.6	71
3300	25	4.6	92
4700	35	7.2	83
WOT	42-44	—	—

0-20 MPH Acceleration — 3.2 sec.

**Engine 135 Mercury (V6) — Prop 13 1/8 x 21 s/s laser**

RPM	MPH	GPH	RANGE*
2400	15	4.2	64
3000	25	5.1	88
4000	35	7.1	86
WOT	46-49	—	—

0-20 MPH Acceleration — 3.1 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.  
 \*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

**[SALE PRICE]**

Boat \$ \_\_\_\_\_

Motor \_\_\_\_\_ H.P. \_\_\_\_\_

Trailer \_\_\_\_\_

Accessories \_\_\_\_\_

T, T & L \_\_\_\_\_

TOTAL PRICE \$ \_\_\_\_\_

**[SPECIFICATIONS]**

LOA 18' (5.49 m.)  
 Beam 89½" (2.28 m.)  
 Depth 43" (1.09 m.)  
 Maximum Depth 53" (1.35 m.)  
 Cockpit Depth 28½" (.72 m.)  
 Approx. Wt w/4.3 GL Volvo  
 Penta 2232 lbs. (1004 kg.)  
 Transom Width 84½" (2.15 m.)

Transom Deadrise 20°  
 LOA on Trailer 21' 6" (6.55 m.)  
 Fuel Capacity 20 gal. (75.7 L.)  
 Maximum Load 1150 lbs. (518 kg.)  
 Max. Person 8 or 1150 lbs.  
 (518 kg.)  
 NMMA Certified

Draft: A. Drive Unit Up 16½" (.42 m.)  
 B. Drive Unit Down 31½" (.8 m.)

**[STANDARD FEATURES]**

Instrument panel includes:  
 speedometer, tachometer,  
 trim, fuel, oil pressure, volt-  
 meter and engine tempera-  
 ture gauges; plus switches for  
 bilge pump, blower, horn,  
 lights, and accessories  
 Bow panel includes: aerator  
 switch, voltmeter, tilt switch,  
 battery charger switch,  
 battery selector switch,  
 trolling motor plug  
 Electric horn  
 Navigation lighting  
 AM/FM stereo cassette with  
 2 speakers  
 Glove box  
 Ski locker  
 Ski tow ring  
 Stainless steel bow eye and  
 stern eyes  
 6" cleats

Walk-thru curved open glass  
 windshield  
 Bilge pump and blower  
 Wraparound bow seats  
 Bow converts to fishing deck  
 2 adjustable bucket seats/  
 2 removable fishing  
 seats/bench seats  
 Anchor locker  
 Passenger grab handle  
 Molded swim platform  
 Stainless steel boarding ladder  
 Convertible stern  
 sundeck/fishing platform  
 Soft top with concealed storage  
 and boot  
 Gelcoat accent stripes  
 Aerated livewell  
 Molded trolling motor mount  
 Trolling motor battery trays  
 Rod holders  
 Tackle box trays  
 Merc/Volvo prop

**[OPTIONS]**

Canvas package: tonneau bow  
 cover, walk-thru curtain, side  
 curtains, stern curtain  
 Mooring cover  
 Cockpit cover  
 Tonneau bow cover  
 Fishing package: trolling motor,  
 fish finder  
 Stainless steel prop (Merc. only)  
 High altitude prop  
 Convenience package: hour  
 meter, depth sounder

Tilt steering  
 Clarion stereo cassette M8430  
 with 2 speakers  
 Clarion stereo cassette M4275  
 with 4 speakers  
 Clarion stereo CD M3170 with  
 4 speakers  
 Automatic bilge pump  
 Telescopic stern light  
 Power antenna  
 Snap-in carpet

**[ENGINE OPTIONS]**

3.0LX MerCruiser (WOPS)  
 3.0LX MerCruiser (WPS)  
 4.3LX Gen+ MerCruiser

3.0 GS Volvo Penta (WOPS)  
 3.0 GS Volvo Penta (WPS)  
 4.3 GL Volvo Penta

**[COLOR OPTIONS]**

Delta Blue/White    Imperial Plum/White    Island Teal/White

**[PERFORMANCE DATA]**

Engine 3.0LX MerCruiser — Prop 13¼ x 21 AL

RPM	MPH	GPH	RANGE*
2100	15	2.5	102
2900	25	3.5	121
3500	35	7.4	85
WOT	42-45	—	—
0-20 MPH Acceleration — 3.4 sec.			

Engine 3.0 GS Volvo Penta — Prop 15 x 17 AL

RPM	MPH	GPH	RANGE*
2000	10	2.1	81
3000	20	3.2	106
4000	35	7.6	82
WOT	41-43	—	—
0-20 MPH Acceleration — 3.7 sec.			

Engine 4.3 GL Volvo Penta — Prop 14 x 19 AL

RPM	MPH	GPH	RANGE*
2200	15	3.0	90
2900	25	4.0	113
3400	35	7.9	80
WOT	47-49	—	—
0-20 MPH Acceleration — 3.2 sec.			

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.  
 \*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

**[SALE PRICE]**

Boat \$ \_\_\_\_\_

Motor \_\_\_\_\_ H.P. \_\_\_\_\_

Trailer \_\_\_\_\_

Accessories \_\_\_\_\_

T, T & L \_\_\_\_\_

TOTAL PRICE \$ \_\_\_\_\_

**[SPECIFICATIONS]**

LOA 19' 11" (6.07 m.)  
 Beam 93½" (2.37 m.)  
 Depth 45½" (1.16 m.)  
 Maximum Depth 56¼" (1.4 m.)  
 Cockpit Depth 31¼" (.81 m.)  
 Approx. Wt. w/5.7 GL Volvo  
 Penta 2499 lbs. (1125 kg.)  
 Transom Width 88½" (2.25 m.)

Transom Deadrise 20°  
 LOA on Trailer 24' 8" (7.52 m.)  
 Fuel Capacity 34 gal. (128.69 L.)  
 Maximum Load 1450 lbs. (653 kg.)  
 Max. Person 10 or 1450 lbs.  
 (653 kg.)  
 NMMA Certified

Draft: A. Drive Unit Up 16½" (.42 m.)  
 B. Drive Unit Down 31¼" (.8 m.)

**[STANDARD FEATURES]**

Instrument panel includes:  
 speedometer, tachometer,  
 trim, fuel, oil pressure, volt-  
 meter and engine tempera-  
 ture gauges; plus switches for  
 bilge pump, blower, horn,  
 lights, and accessories  
 Bow panel includes: aerator  
 switch, voltmeter, tilt switch,  
 battery charger switch,  
 battery selector switch,  
 trolling motor plug  
 Electric horn  
 Navigation lighting  
 AM/FM stereo cassette with  
 2 speakers  
 Glove box  
 Ski locker  
 Ski tow ring  
 Stainless steel bow eyes and  
 stern eyes  
 6" cleats

Walk-thru curved open glass  
 windshield  
 Bilge pump and blower  
 Wraparound bow seats  
 Bow converts to fishing deck  
 2 adjustable bucket seats/  
 2 removable fishing  
 seats/bench seats  
 Anchor locker  
 Passenger grab handle  
 Molded swim platform  
 Stainless steel boarding ladder  
 Convertible stern sundeck/  
 fishing platform  
 Soft top with concealed storage  
 and boot  
 Aerated livewell  
 Molded trolling motor mount  
 Trolling motor battery trays  
 Rod holders  
 Tackle box trays  
 Merc/Volvo prop

**[OPTIONS]**

Canvas package: tonneau bow  
 cover, walk-thru curtain, side  
 curtains, stern curtain  
 Mooring cover  
 Cockpit cover  
 Clarion stereo cassette M8430  
 with 2 speakers  
 Clarion stereo cassette M3170  
 with 4 speakers  
 Clarion stereo CD M4275 with  
 4 speakers

Fishing package: trolling motor,  
 fish finder  
 High altitude prop  
 Stainless steel prop (Merc. only)  
 Convenience package: hour  
 meter, depth sounder  
 Tilt steering  
 Automatic bilge pump  
 Telescopic stern light  
 Power antenna  
 Snap-in carpet

**[ENGINE OPTIONS]**

43LX Gen+ MerCruiser	5.7 LX Bravo III	5.7 GL Volvo Penta
43LX Gen+ Bravo III	5.7LX EFI MerCruiser	5.7 GLi Volvo Penta
5.7L MerCruiser	4.3 GL Volvo Penta	5.7 GS Volvo Penta
5.7L EFI MerCruiser	4.3 GL DP Volvo Penta	5.7 GS DP Volvo Penta
5.7 LX MerCruiser	4.3 Gi DP Volvo Penta	5.7 GSi Volvo Penta

**[COLOR OPTIONS]**

Delta Blue/White      Imperial Plum/White      Island Teal/White

**[PERFORMANCE DATA]**

Engine 4.3LX Gen+ MerCruiser — Prop 13¼ x 21 AL

RPM	MPH	GPH	RANGE*
2400	15	3.0	160
3200	25	4.0	202
3700	35	7.9	141
WOT	46-48	—	—

0-20 MPH Acceleration — 3.3 sec.

Engine 4.3 GL Volvo Penta — Prop 14 x 19 AL

RPM	MPH	GPH	RANGE*
2000	15	2.8	161
3000	25	3.8	197
4000	35	6.9	152
WOT	45-47	—	—

0-20 MPH Acceleration — 3.4 sec.

Engine 5.7L MerCruiser — Prop 14 x 19 AL

RPM	MPH	GPH	RANGE*
2200	15	3.3	144
2800	25	4.3	186
3500	35	8.0	141
WOT	54-56	—	—

0-20 MPH Acceleration — 3.1 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

\*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

**[SALE PRICE]**

Boat \$ \_\_\_\_\_

Motor \_\_\_\_\_ H.P. \_\_\_\_\_

Trailer \_\_\_\_\_

Accessories \_\_\_\_\_

T, T & L \_\_\_\_\_

**TOTAL PRICE \$** \_\_\_\_\_

**[SPECIFICATIONS]**

LOA 20' 1 1/4" (6.13 m.)  
 Beam 94 1/2" (2.39 m.)  
 Depth 71" (1.80 m.)  
 Maximum Depth 50" (1.27 m.)  
 Cockpit Depth 35 1/4" (.90 m.)  
 Approx. Wt. w/5.7L MerCruiser  
 2800 lbs. (1260 kg.)  
 Transom Width 90" (2.29 m.)  
 Draft: A. Drive Unit Up 18 1/2" (.47 m.)  
 B. Drive Unit Down 33" (.84 m.)

Transom Deadrise 19°  
 LOA on Trailer 24' 8"  
 Fuel Capacity 45 gal. (170.33 L.)  
 Maximum Load 1450 lbs  
 (655 kg.)  
 Max. Person 8 or 1150 lbs.  
 (518 kg.)  
 NMMA Certified

**[STANDARD FEATURES]**

Instrument panel includes:  
 speedometer, tachometer,  
 trim, fuel, oil pressure, volt-  
 meter and engine tempera-  
 ture gauges; plus switches for  
 bilge pump, blower, horn,  
 lights, and accessories

Electric horn  
 Automatic bilge pump  
 Blower  
 Navigation lighting  
 AM/FM stereo cassette with  
 2 speakers  
 Floor storage area  
 Ski tow ring  
 Stainless steel bow eye & stern eyes  
 Tilt steering

Lockable cabin doors  
 6" cleats  
 Walk-thru curved full glass  
 windshield  
 Bow access step  
 Anchor locker  
 Passenger grab handle  
 Molded swim platform  
 Stainless steel boarding ladder  
 Soft top with concealed storage  
 and boot  
 Gelcoat accent stripes  
 Merc/Volvo prop  
 BS Seating: starboard bucket/  
 port sleeper/aft jump seats  
 Stainless steel bow rails and  
 stern rail

**[OPTIONS]**

Canvas package: side curtains,  
 stern curtain  
 Mooring cover  
 Cockpit cover  
 Clarion stereo cassette M8430  
 with 2 speakers  
 Clarion stereo cassette M3170  
 with 4 speakers  
 Clarion stereo CD M4275 with  
 4 speakers  
 Porta-pottie

Bow pad  
 High altitude prop  
 Stainless steel prop (Merc. only)  
 L Seating: starboard bucket/  
 L-shape bench seat  
 SL Seating: 2 bucket seats/aft  
 bench/sun lounge  
 Telescopic stern light  
 Convenience package: hour  
 meter, depth sounder

**[ENGINE OPTIONS]**

4.3LX Gen+ MerCruiser  
 4.3LX Gen+ Bravo III MerCruiser  
 5.7L MerCruiser  
 5.7L EFI MerCruiser  
 5.7LX MerCruiser  
 5.7LX Bravo III MerCruiser  
 5.7LX EFI MerCruiser  
 4.3 GL Volvo Penta

4.3 GL DP Volvo Penta  
 4.3 Gi DP Volvo Penta  
 5.7 GL Volvo Penta  
 5.7 GLi Volvo Penta  
 5.7 GS Volvo Penta  
 5.7 GS DP Volvo Penta  
 5.7 GSi Volvo Penta  
 TAMD 22 Volvo Penta (Diesel)

**[COLOR OPTIONS]**

Delta Blue/White      Imperial Plum/White      Island Teal/White

**[PERFORMANCE DATA]**

Engine 4.3LX Gen+ MerCruiser — Prop 13 1/4 x 21 AL

RPM	MPH	GPH	RANGE*
2400	15	3.0	160
3200	25	4.0	202
3700	35	7.9	141
WOT	44-46	—	—

0-20 MPH Acceleration — 3.5 sec.

Engine 4.3 GL Volvo Penta — Prop 14 x 19 AL

RPM	MPH	GPH	RANGE*
2000	15	2.8	161
3000	25	3.8	197
4000	35	6.9	152
WOT	43-45	—	—

0-20 MPH Acceleration — 3.6 sec.

Engine 5.7L MerCruiser — Prop 14 x 19 AL

RPM	MPH	GPH	RANGE*
2200	15	3.3	144
2800	25	4.3	186
3500	35	8.0	141
WOT	51-53	—	—

0-20 MPH Acceleration — 3.3 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.  
 \*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

**[SALE PRICE]**

Boat \$ \_\_\_\_\_

Motor \_\_\_\_\_ H.P. \_\_\_\_\_

Trailer \_\_\_\_\_

Accessories \_\_\_\_\_

T, T & L \_\_\_\_\_

**TOTAL PRICE \$** \_\_\_\_\_



**[SPECIFICATIONS]**

LOA 24' 10" (7.57 m.)  
 Beam 102" (2.59 m.)  
 Depth 80½" (2.04 m.)  
 Maximum Depth 91" (2.31 m.)  
 Cockpit Depth 35" (.89 m.)  
 Approx. Wt. w/5.7L MerCruiser  
 4385 lbs. (1973 kg.)

Draft: A. Drive Unit Up 17" (.42 m.)  
 B. Drive Unit Down 35" (.89 m.)

**[STANDARD FEATURES]**

Instrument panel includes:  
 speedometer, tachometer,  
 trim, fuel, oil pressure, volt-  
 meter and engine tempera-  
 ture gauges; plus switches for  
 bilge pump, blower, navigation/  
 anchor lights, panel lights,  
 interior lights and horn; hour  
 meter and depth sounder  
 Horn  
 Automatic bilge pump  
 Blower  
 Clarion stereo M8430 cassette  
 with 4 speakers  
 Welded bow and stern rails  
 Bow pulpit w/roller & bow  
 rope locker  
 Stainless steel bow eye and  
 stern eyes  
 Stainless steel cleats  
 Complete walkaround deck  
 Curved full glass windshield  
 Translucent deck hatch

**[OPTIONS]**

Galley package: microwave  
 oven, 12V/110 refrigerator,  
 alcohol/electric stove, 110  
 dockside power, hot water  
 heater  
 Snap-in carpet  
 Dual battery switch  
 Cockpit table  
 Hydraulic trim tabs  
 Transom shower  
 Starboard windshield wiper  
 Camper canvas package

**[ENGINE OPTIONS]**

5.7L MerCruiser  
 5.7L EFI MerCruiser  
 5.7LX MerCruiser  
 5.7LX Bravo III  
 5.7LX EFI MerCruiser  
 7.4L MerCruiser  
 7.4L Bravo III  
 7.4LX EFI MerCruiser  
 5.7 GL Volvo Penta  
 5.7 GLi Volvo Penta  
 5.7 GS Volvo Penta  
 5.7 GS DP Volvo Penta

**[COLOR OPTIONS]**

Delta Blue/White    Imperial Plum/White    Island Teal/White

Transom Width 98½" (2.50 m.)  
 Transom Deadrise 20°  
 LOA on Trailer 26' 10" (8.18 m.)  
 Fuel Capacity 56 gal. (211.7 L.)  
 Maximum Load 2240 lbs. (1008 kg.)  
 Max. Person 16 or 2240 lbs. (1008 kg.)  
 NMMA Certified

Compass  
 Merc/Volvo prop  
 18-gallon water tank  
 Main cabin includes: enclosed  
 head with 6-gallon porta-  
 pottie, fiberglass shower stall,  
 hanging clothes locker, cabin  
 table, cabin courtesy lights, ice  
 box, alcohol stove, and on-  
 demand water faucet  
 Molded swim platform  
 Stainless steel boarding ladder  
 Bimini top  
 Gelcoat accent stripes  
 Merc/Volvo controls  
 Tilt steering  
 Ventedport & mid-cabin windows  
 Cockpit area includes: Deluxe  
 captain's chair, L-shaped pass-  
 enger seating with convertible  
 aft seat, stern storage  
 compartment and walk-  
 through transom with gate

Canvas package for bimini top:  
 side, aft, clear connector  
 Cockpit cover  
 High altitude prop  
 Stainless steel prop (Merc. only)  
 Clarion stereo cassette M3170  
 with 4 speakers  
 Clarion stereo CD M4275 with  
 4 speakers  
 Manual china head with pump-out  
 Grey water holding tank  
 Telescopic stern light

**[PERFORMANCE DATA]**

Engine 5.7 GL Volvo Penta — Prop 15 x 17 AL

RPM	MPH	GPH	RANGE*
2500	15	7.4	102
3400	25	10.7	118
4600	35	13.2	133
WOT	38-41	—	—

0-20 MPH Acceleration — 3.6 sec.

Engine 5.7L MerCruiser— Prop 23 Mirage

RPM	MPH	GPH	RANGE*
2500	15	10.5	72
3300	25	13.5	93
4200	35	18.5	95
WOT	46-49	—	—

0-20 MPH Acceleration — 2.9 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

\*Range: Mileage range at designated RPM and MPH as shown above starting with a full tank of gas.

**[SALE PRICE]**

Boat \$ \_\_\_\_\_

Motor \_\_\_\_\_ H.P. \_\_\_\_\_

Trailer \_\_\_\_\_

Accessories \_\_\_\_\_

T, T & L \_\_\_\_\_

**TOTAL PRICE \$** \_\_\_\_\_

# STERNDRIVE ENGINE INFORMATION

The following pages contain data about sterndrives offered in our 1997 product.

**MODEL:**  
 Horsepower at Prop Shaft  
 Cylinders  
 Cubic Inches  
 Compression Ratio  
 Max. Recommended RPM  
 Lower Unit Gear Ratio  
 Tilt  
 Trim  
 Length  
 Width  
 Height  
 Weight

**3.0LX MERCRAUISER**  
 135 hp/101 kw.  
 4  
 181  
 9.3:1  
 4400-4600  
 1.94:1  
 Power  
 Power  
 34"  
 23"  
 20" (above crankshaft at CL)  
 635 lbs. (pkg. weight)

**MODEL:**  
 Horsepower at Prop Shaft  
 Cylinders  
 Cubic Inches  
 Compression Ratio  
 Max. Recommended RPM  
 Lower Unit Gear Ratio  
 Tilt  
 Trim  
 Length  
 Width  
 Height  
 Weight

**4.3LX GEN+ MERCRAUISER**  
 190 hp/141 kw.  
 6  
 262  
 9.4:1  
 4400-4800  
 1.84:1  
 Power  
 Power  
 33"  
 30"  
 21" (above crankshaft at CL)  
 840 lbs. (pkg. weight)

**MODEL:**  
 Horsepower at Prop Shaft  
 Cylinders  
 Cubic Inches  
 Compression Ratio  
 Max. Recommended RPM  
 Lower Unit Gear Ratio  
 Tilt  
 Trim  
 Length  
 Width  
 Height  
 Weight

**4.3LX GEN+ BRAVO III MERCRAUISER**  
 190 hp/141 kw.  
 6  
 262  
 9.4:1  
 4400-4800  
 2.43:1  
 Power  
 Power  
 33"  
 30"  
 21" (above crankshaft at CL)  
 894 lbs. (pkg. weight)

**MODEL:**  
 Horsepower at Prop Shaft  
 Cylinders  
 Cubic Inches  
 Compression Ratio  
 Max. Recommended RPM  
 Lower Unit Gear Ratio  
 Tilt  
 Trim  
 Length  
 Width  
 Height  
 Weight

**5.7L MERCRAUISER**  
 210 hp/156 kw.  
 8  
 350  
 9.1:1  
 4200-4600  
 1.62:1  
 Power  
 Power  
 37"  
 29"  
 21" (above crankshaft at CL)  
 938 lbs. (pkg. weight)

**MODEL:**  
 Horsepower at Prop Shaft  
 Cylinders  
 Cubic Inches  
 Compression Ratio  
 Max. Recommended RPM  
 Lower Unit Gear Ratio  
 Tilt  
 Trim  
 Length  
 Width  
 Height  
 Weight

**5.7LX MERCRAUISER**  
 250 hp/186 kw.  
 8  
 350  
 9.1:1  
 4400-4800  
 1.47:1  
 Power  
 Power  
 37"  
 29"  
 22" (above crankshaft at CL)  
 938 lbs. (pkg. weight)

**MODEL:**  
 Horsepower at Prop Shaft  
 Cylinders  
 Cubic Inches  
 Compression Ratio  
 Max. Recommended RPM  
 Lower Unit Gear Ratio  
 Tilt  
 Trim  
 Length  
 Width  
 Height  
 Weight

**5.7LX BRAVO III MERCRAUISER**  
 250 hp/186 kw.  
 8  
 350  
 9.1:1  
 4400-4800  
 2.2:1  
 Power  
 Power  
 37"  
 29"  
 21" (above crankshaft at CL)  
 994 lbs. (pkg. weight)

**MODEL:**  
 Horsepower at Prop Shaft  
 Cylinders  
 Cubic Inches  
 Compression Ratio  
 Max. Recommended RPM  
 Lower Unit Gear Ratio  
 Tilt  
 Trim  
 Length  
 Width  
 Height  
 Weight

**5.7LX EFI MERCRAUISER**  
 250 hp/186 kw.  
 8  
 350  
 9.1:1  
 4400-4800  
 1.62:1  
 Power  
 Power  
 37"  
 30"  
 22" (above crankshaft at CL)  
 966 lbs. (pkg. weight)

**MODEL:**  
 Horsepower at Prop Shaft  
 Cylinders  
 Cubic Inches  
 Compression Ratio  
 Max. Recommended RPM  
 Lower Unit Gear Ratio  
 Tilt  
 Trim  
 Length  
 Width  
 Height  
 Weight

**7.4L MERCRAUISER**  
 300 hp/224 kw.  
 8  
 454  
 8.0:1  
 4200-4600  
 1.50:1  
 Power  
 Power  
 39"  
 32"  
 20" (above crankshaft at CL)  
 1,141 lbs. (pkg. weight)

**MODEL:**  
 Horsepower at Prop Shaft  
 Cylinders  
 Cubic Inches  
 Compression Ratio  
 Max. Recommended RPM  
 Lower Unit Gear Ratio  
 Tilt  
 Trim  
 Length  
 Width  
 Height  
 Weight

**7.4L BRAVO III MERCRAUISER**  
 300 hp/224 kw.  
 8  
 454  
 8.0:1  
 4200-4600  
 2.0:1  
 Power  
 Power  
 39"  
 32"  
 23" (above crankshaft at CL)  
 1,162 lbs. (pkg. weight)

**MODEL:**  
 Horsepower at Prop Shaft 300 hp/231 kw.  
 Cylinders 8  
 Cubic Inches 454  
 Compression Ratio 8.0:1  
 Max. Recommended RPM 4200-4600  
 Lower Unit Gear Ratio 1.50:1  
 Tilt Power  
 Trim Power  
 Length 39"  
 Width 32"  
 Height 24" (above crankshaft at CL)  
 Weight 1156 lbs. (pkg. weight)

**MODEL:**  
 Horsepower at Prop Shaft 135 hp/100 kw.  
 Cylinders 4  
 Cubic Inches 181  
 Compression Ratio 9.2:1  
 Max. Recommended RPM 4600  
 Lower Unit Gear Ratio 1.97:1  
 Tilt Power  
 Trim Power  
 Length 34"  
 Width 24 1/4"  
 Height 19 3/4" (above crankshaft at CL)  
 Weight 665 lbs. (pkg. weight)

**MODEL:**  
 Horsepower at Prop Shaft 190 hp/141 kw.  
 Cylinders 6  
 Cubic Inches 262  
 Compression Ratio 9.4:1  
 Max. Recommended RPM 4600  
 Lower Unit Gear Ratio 1.85:1  
 Tilt Power  
 Trim Power  
 Length 31 1/4"  
 Width 29 1/2"  
 Height 20 1/4" (above crankshaft at CL)  
 Weight 880 lbs. (pkg. weight)

**MODEL:**  
 Horsepower at Prop Shaft 205 hp/152 kw.  
 Cylinders 6  
 Cubic Inches 262  
 Compression Ratio 9.4:1  
 Max. Recommended RPM 4800  
 Lower Unit Gear Ratio 2.30:1  
 Tilt Power  
 Trim Power  
 Length 31 3/4"  
 Width 29 1/2"  
 Height 20 1/4" (above crankshaft at CL)  
 Weight 891 lbs. (pkg. weight)

**MODEL:**  
 Horsepower at Prop Shaft 190 hp/141 kw.  
 Cylinders 6  
 Cubic Inches 262  
 Compression Ratio 9.4:1  
 Max. Recommended RPM 4600  
 Lower Unit Gear Ratio 2.30:1  
 Tilt Power  
 Trim Power  
 Length 31 3/4"  
 Width 29 1/2"  
 Height 20 1/4" (above crankshaft at CL)  
 Weight 891 lbs. (pkg. weight)

[50]

**MODEL:**  
 Horsepower at Prop Shaft 250 hp/185 kw.  
 Cylinders 8  
 Cubic Inches 350  
 Compression Ratio 9.1:1  
 Max. Recommended RPM 4600  
 Lower Unit Gear Ratio 1.51:1  
 Tilt Power  
 Trim Power  
 Length 38 1/2"  
 Width 28 1/4"  
 Height 21 1/4" (above crankshaft at CL)  
 Weight 979 lbs. (pkg. weight)

**MODEL:**  
 Horsepower at Prop Shaft 250 hp/186 kw.  
 Cylinders 8  
 Cubic Inches 350  
 Compression Ratio 9.1:1  
 Max. Recommended RPM 4600  
 Lower Unit Gear Ratio 1.95:1  
 Tilt Power  
 Trim Power  
 Length 38 1/2"  
 Width 28 1/4"  
 Height 21 1/4" (above crankshaft at CL)  
 Weight 990 lbs. (pkg. weight)

**MODEL:**  
 Horsepower at Prop Shaft 215 hp/159 kw.  
 Cylinders 8  
 Cubic Inches 350  
 Compression Ratio 3.4:8  
 Max. Recommended RPM 4600  
 Lower Unit Gear Ratio 1.60:1  
 Tilt Power  
 Trim Power  
 Length 38 1/2"  
 Width 28 1/4"  
 Height 20 1/4" (above crankshaft at CL)  
 Weight 979 lbs. (pkg. weight)

**MODEL:**  
 Horsepower at Prop Shaft 225 hp/167 kw.  
 Cylinders 8  
 Cubic Inches 350  
 Compression Ratio 9.1:1  
 Max. Recommended RPM 4600  
 Lower Unit Gear Ratio 1.60:1  
 Tilt Power  
 Trim Power  
 Length 38 1/2"  
 Width 28 1/4"  
 Height 20 1/4" (above crankshaft at CL)  
 Weight 991 lbs. (pkg. weight)

**MODEL:**  
 Horsepower at Prop Shaft 280 hp/207 kw.  
 Cylinders 8  
 Cubic Inches 350  
 Compression Ratio 9.1:1  
 Max. Recommended RPM 5000  
 Lower Unit Gear Ratio 1.95:1  
 Tilt Power  
 Trim Power  
 Length 38 1/2"  
 Width 28 1/4"  
 Height 20 1/4" (above crankshaft at CL)  
 Weight 1002 lbs. (pkg. weight)

[51]

# SEATING OPTIONS

**MODEL:**  
 Horsepower at Prop Shaft 300 hp/222 kw.  
 Cylinders 8  
 Cubic Inches 454  
 Compression Ratio 8.0:1  
 Max. Recommended RPM 4600  
 Lower Unit Gear Ratio 1.43:1  
 Tilt Power  
 Trim Power  
 Length 40 1/4"  
 Width 31 1/2"  
 Height 21 1/8" (above crankshaft at CL)  
 Weight 1188 lbs. (pkg. weight)


**MODEL:**  
 Horsepower at Prop Shaft 300 hp/224 kw.  
 Cylinders 8  
 Cubic Inches 454  
 Compression Ratio 8.0:1  
 Max. Recommended RPM 4600  
 Lower Unit Gear Ratio 1.78:1  
 Tilt Power  
 Trim Power  
 Length 40 1/4"  
 Width 31 1/2"  
 Height 21 1/4" (above crankshaft at CL)  
 Weight 1200 lbs. (pkg. weight)

**MODEL:**  
 Horsepower at Prop Shaft 330 hp/244 kw.  
 Cylinders 8  
 Cubic Inches 454  
 Compression Ratio 8.0:1  
 Max. Recommended RPM 4600  
 Lower Unit Gear Ratio 1.43:1  
 Tilt Power  
 Trim Power  
 Length 40 1/4"  
 Width 31 1/2"  
 Height 21 1/2" (above crankshaft at CL)  
 Weight 1193 lbs. (pkg. weight)


**MODEL:**  
 Horsepower at Prop Shaft 98 hp/73 kw.  
 Cylinders 4  
 Cubic Inches 122  
 Compression Ratio 17.5:1  
 Max. Recommended RPM 4500  
 Lower Unit Gear Ratio 2.18:1  
 Tilt Power  
 Trim Power  
 Length 31 1/2"  
 Width 28 3/4"  
 Height 18" (above crankshaft at CL)  
 Weight 742 lbs. (pkg. weight)

**MODEL:**  
 Horsepower at Prop Shaft 139 hp/103 kw.  
 Cylinders 4  
 Cubic Inches 146  
 Compression Ratio 17.5:1  
 Max. Recommended RPM 4000  
 Lower Unit Gear Ratio 2.30:1  
 Tilt Power  
 Trim Power  
 Length 37 3/4"  
 Width 29 1/2"  
 Height 19 3/4" (above crankshaft at CL)  
 Weight 970 lbs. (pkg. weight)


\*Europe only

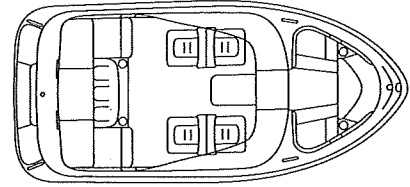


**SS Seating:**  
 Adjustable Fold-out Sleeper Seats/Aft Jump Seats

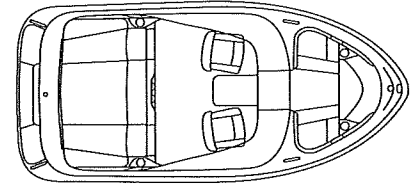


**SL Seating:**  
 2 Bucket Seats/Aft Bench/Sun Lounge

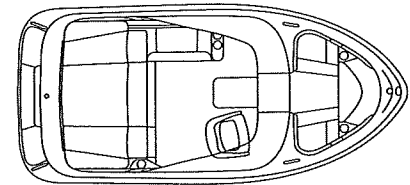


**L-Shaped Seating:**  
 Deluxe Starboard Bucket/L-Bench Seat

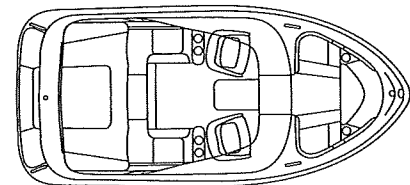


**U-Shaped Seating:**  
 Deluxe Bucket Seats/U-Rear Bench

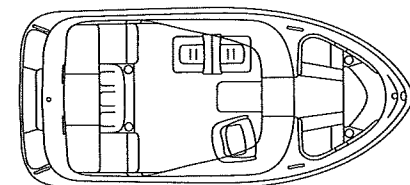


**BS Seating:**  
 Adjustable Starboard Bucket/Port Sleeper Seat/Aft Jump Seats

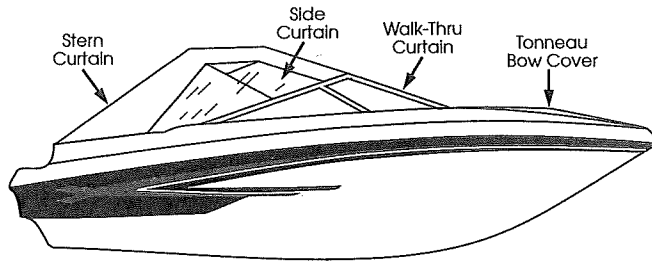

Canvas Package for Open Bow

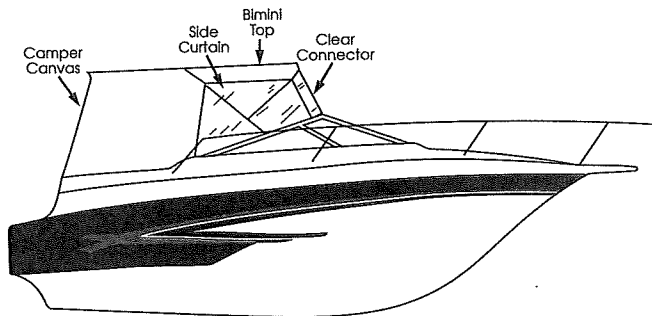

Camper Canvas Package

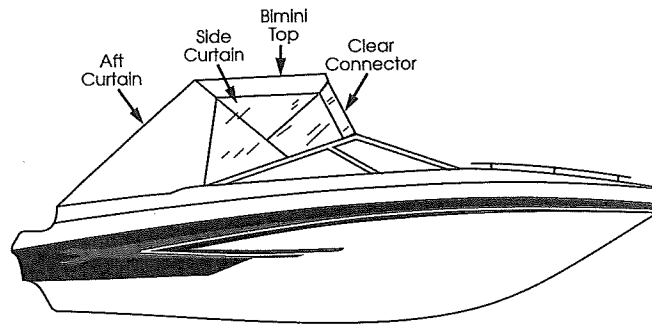

Bimini Canvas Package





**GLASTRON®**

*Runabouts Done Right*

700 West River Road, Little Falls, MN 56345