

The image shows the cover of a spiral-bound manual. The cover is dark with a starburst graphic in the center. The text 'GLASTRON 2000' is printed at the top, and 'Product Specifications Manual' is printed at the bottom. The spiral binding is on the left side.

GLASTRON 2000

**Product
Specifications Manual**

Table of Contents

Model Directory	3
Glastron's Track Record	4
Glastron Performance	5
SSV Hull Design	6
Fiberglass Comparison	7
A Watertight Story	8
A Better Warranty	9
Glastron Limited Warranty.....	10-11
Features & Benefits	12-13
Seating Choices	14
Canvas Choices	15
Financing Guide	16
Definitions of Measurements	17
2000 Model Specifications	18-61
Sterndrive Engine Information ...	62-67



Model Designator Key

0 = Outboard
 5 = Open Bow Sterndrive
 7 = Closed Bow Sterndrive
 9 = Cuddy Cabin Sterndrive

Model Directory

SX Series

SX 170	18
SX 175/SX 175 Millennia.....	20
SX 177/SX 177 Millennia.....	22
SX 195/SX 195 Millennia.....	24
SX 175 SF/SX 175 SF Millennia	26
SX 199	28

GS Outboard Bowriders

GS 160	30
GS 160 Ski & Fish.....	32

GX Outboard Bowrider

GX 180	34
--------------	----

GX Sterndrive Bowriders

GX 185	36
GX 205	38
GX 225	40
GX 205 Collector's Edition.....	42

GX Ski & Fish

GX 180 Ski & Fish.....	44
GX 185 Ski & Fish.....	46
GX 205 Ski & Fish.....	48

GS Sport Cruisers


GS 209	50
GS 229	52
GS 249	54

Glastron/Carlson Sportboats


CSX 18.....	56
CSX 21.....	58
CSX 23.....	60

Glastron's Track Record

- **Founded in 1956**, Glastron was one of the very first companies to mass-produce fiberglass boats.
- **Glastron specializes primarily in building runabouts.** Their product line now encompasses other types of boats, but even those models exhibit the distinctive styling and performance that Glastron's runabouts are known for.
- In 44 years, Glastron has manufactured **more fiberglass runabouts than any other manufacturer**—over 335,000 at last count.
- In recent years, the company's products have achieved notable popularity with boaters. Since 1992, **Glastron sales have grown more than ten times the industry average.**

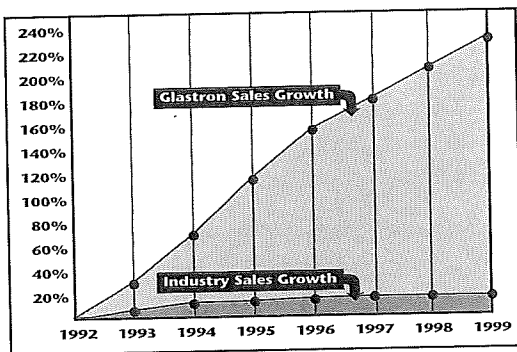


Glastron Performance

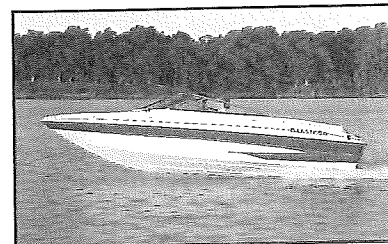


- Glastron's **penchant for performance** is known throughout the industry.
- Glastron has collected **dozens of design and performance awards** over the years. Among them: twelve Product Excellence Awards from Powerboat magazine.
- Every Glastron model delivers performance attributes that every family boater can appreciate (and every Glastron owner knows):
 - Quick planing times
 - Impressive top end speeds
 - Low minimum planing speeds (particularly important for tubing, kneeboarding, and wakeboarding)
 - Agile handling
 - Excellent fuel economy
- In short, **Glastron boats do what boats are meant to do.**

SSV® Hull Design

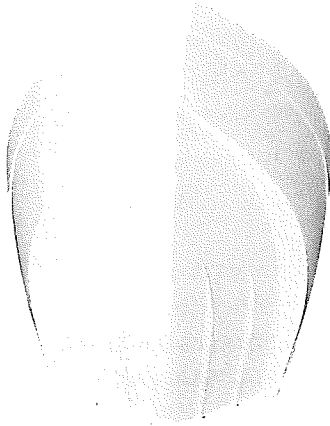


- A boat's hull design is the most important thing that determines how that boat will perform. That's why Glastron has made hull design its first priority right from day one.
- The legendary SSV® hull (Super Stable Vee) is the biggest reason Glastron boats run, corner and plane so well.
- In boating circles, people recognize the SSV hull as **one of the best-performing hulls ever designed**. Want more proof? Just ask any Glastron owner.
- Glastron's SSV® hull is patented. So only Glastron has it. And no matter what other manufacturers may tell you, they don't have an SSV hull.

Fiberglass Comparison



Most boatbuilders still use woven roving fiberglass, the kind used in shower stalls and hot tubs. Fiber strands are loose and porous, resulting in a low fiber-to-resin ratio. In fact, most boats made with woven roving actually contain more resin than fiberglass.



Glastron uses multi-axial knitted fiberglass fabric. It's the same kind of hi-tech material used in offshore performance boats, snowboards and space shuttles. And it's one reason their hulls and decks are up to 50% stronger and 15% lighter.



A Watertight Story

Wood has long been a major component in boats. But trapped moisture can cause wood to deteriorate. That's why Glastron has gone to extremes to make sure you'll never have to worry about wood rot.

PermaPanel

- Wherever wood is used in our boats, Glastron uses only PermaPanel pressure-treated marine plywood. It's so reliable that it comes with a **lifetime limited warranty**.

- We make most of our seat shells, seat bases and engine covers from **nylon rotocast materials**. They're light, fit perfectly, and are virtually indestructible

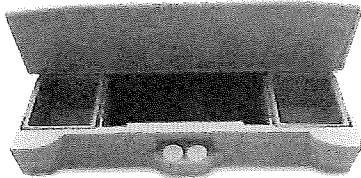

- Many Glastron models feature **fiberglass floors**. Their integrated construction provides a uniform fit, seamless beauty and easy clean-up. And they'll never rot.

Glastron's Unmatched Warranty

Every boatbuilder claims to make a top quality product. So how can you tell who really builds the best boat? It's simple, really. Just ask about the warranty. Take a look at who stands behind their product. If you want to know who builds it better, then look at who backs it better.



- Every Glastron comes with a **5-year limited hull warranty**.

- Glastron also provides a **2-year limited warranty on other components...twice** as long as most boatbuilders.



- All PermaPanel wood components come with a **lifetime limited warranty**.

Propulsion warranties vary by manufacturer. Full details can be found in the Glastron Owner's Manual.

Glastron Limited Warranty

Glastron Boats, a Division of Larson/Glastron Boats, Inc., a subsidiary of Genmar Industries, Inc. warrants to the first retail purchaser of a new Glastron boat bought from a factory authorized dealer that the hull is free from defects in materials and workmanship for a period of five (5) years, and free from defects in materials and workmanship in other components for a period of two (2) years, measured from the date of retail sale. Glastron warrants that it will repair or replace, at its sole discretion, those parts of the boat manufactured by Glastron and which are found, within reasonable judgment of Glastron, to contain defects within the applicable warranty periods.

This Glastron boat, including any alleged defective part, must be returned to an authorized Glastron dealer within the warranty period to obtain warranty service. The Glastron dealer will carry out the warranty procedures on the Purchaser's behalf. All warranty work will be performed at an authorized dealer, at the Glastron factory or at another repair facility that Glastron selects. Purchaser is responsible for the expense associated with transporting the boat to and from the repair facility.

Glastron's obligation with respect to this warranty is limited to making repairs or replacement of parts, and no claim of breach of warranty shall be cause for cancellation or recession of the contract of sale of the Glastron boat. Any action for breach of warranty relating to a boat must be brought within a period of sixty (60) days following Glastron's failure to repair or replace alleged defects.

WHAT IS NOT COVERED:

This Warranty does not cover:

1. A boat, including its components, that has been altered or modified so as to adversely affect its operation, performance or durability.
2. Engines, outdrives, controls, propellers, batteries or other equipment or accessories which are not manufactured by Glastron, whether or not warranted by other manufacturers.
3. Gelcoat finishes (including blistering, and osmotic blistering, cracking, crazing or discoloration), mirrors, window glass, chrome and chrome painted fixtures, stainless steel or aluminum finishes.
4. Leakage around windshields, hatches or other designed openings.

5. Any boat which has been misused, used in a negligent manner, used for racing, used for rental or commercial purposes, used with an improper trailer or trailered improperly, used without proper maintenance, operated contrary to any instruction furnished by Glastron, or operated in violation of any Federal, State, Coast Guard or other governmental agency laws, rules or regulations.
6. A boat which has been overpowered, according to the maximum recommended engine horsepower specified on the capacity plate, or which has had the transom altered with bracket or jack plate.
7. Weight, speed, fuel economy or other estimated performance characteristics.
8. Loss of time, inconvenience, rental charges, travel expense, loss of use, boat payments, in-and-out-of-water charges, trailering or towing charges, storage charges, loss of or damage to personal property, or other remedies not specifically allowed.
9. Dealer preparation, adjustments, alignments and cleaning in preparing the boat for delivery.
10. Repairs made necessary by normal wear and use.

Remedy under this warranty is expressly limited to repair or replacement of defects in materials or workmanship, and **does not include incidental or consequential damages** which are specially **DISCLAIMED**.

NOTE: SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. The express limited warranty described above is exclusive. All **IMPLIED WARRANTIES ARE LIMITED IN THEIR DURATION TO THE TWO (2) YEAR WARRANTY PERIOD**. ALL IMPLIED WARRANTIES, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED IN THEIR ENTIRETY AFTER EXPIRATION OF THE TWO (2) YEAR WARRANTY PERIOD. There are no warranties which extend beyond the description of the face hereof.

NOTE: SOME STATES DO NOT ALLOW LIMITATION ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

This document contains the entire warranty given by Glastron. Glastron does not authorize any person or persons, including its Glastron dealers, to change the terms of this express limited warranty, which is Glastron's only warranty. Glastron reserves the right to change or improve the design or manufacture of Glastron boats without obligation to modify any boat previously manufactured.

Before your customers make a choice, make sure they know these facts.

FEATURES:**BENEFITS:**


- | | |
|---|---|
| 1. Patented SSV® hull design | Quick planing; superior handling; enhanced fuel economy |
| 2. Knitted fiberglass hull construction | 15% lighter; 50% stronger; better finish |
| 3. Hulls on outboard models specially designed for outboard power | Asymmetrical strakes compensate for prop torque |
| 4. PermaPanel pressure-treated wood | Lifetime warranty; no worry about wood rot |
| 5. Fiberglass molded bow liner | Better appearance; stronger |
| 6. Keel areas are overlapped with fiberglass | Double strength in this all-important area |
| 7. All deck fittings are backed by under-deck supports fiberglassed into deck | Strength; durability |
| 8. Motor mounts are fiberglass encapsulated onto the hull | Strength; reduces engine vibration |
| 9. Aircraft locknuts on bolts | Strength; long-term durability |
| 10. One-piece, lock looped marine-grade carpet | Better appearance; no seams |

- | | |
|--|---|
| 11. Marine-grade vinyl; marine-grade stitching | UV protected |
| 12. Carpeted storage areas | Appearance; provides padding for gear |
| 13. Kneeboard-size ski locker | Convenient storage for watersport toys |
| 14. Ski locker drain in subfloor | Lets water drain into bilge, keeping locker dry |
| 15. Tilt steering wheel standard on most models | More comfortable steering |
| 16. All models feature automotive-style instrument panel | Easy-to-read gauges; convenient controls; improved styling |
| 17. Lower, built-in swim platform with stainless steel boarding ladder below | Ease of boarding |
| 18. Each new model is carefully designed for the proper weight-to-horsepower ratio | Better planing time; better fuel economy; better top speed |
| 19. Choice of MerCruiser or Volvo Penta sterndrive power | Customer can select preferred brand |
| 20. Choice of OMC, Mercury Marine or Yamaha Marine pre-rig on all outboards | Factory controls and gauges match power choice for complete package |


There are many more facts and features that have allowed Glastron to be recognized as an industry leader in innovation and safety. Make sure your customers know why Glastrons are...

Runabouts Done Right®


Canvas Choices



Soft Top




Bimini Top



Canvas Package



Camper Canvas Package



Cockpit Cover




Bow Cover

Mooring Cover


GX, GS Sport Cruiser, and Glastron/Carlson models feature color-coordinated Sunbrella® canvas.

SX models, GS 160, and GS 160 SF feature white vinyl canvas.


Seating Choices

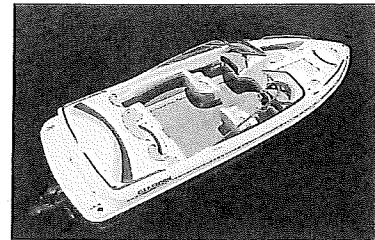


Bucket/Sunlounge Seating (SL)

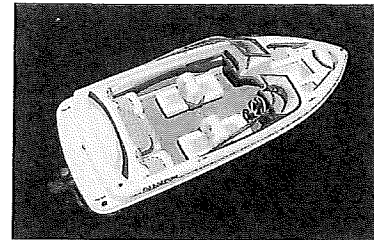

Sleeper Seating (SS)

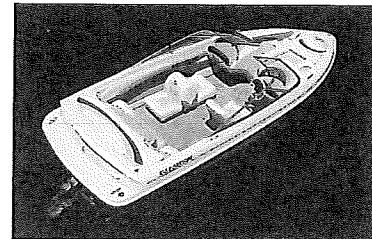

Bucket/Sleeper Seating (BS)

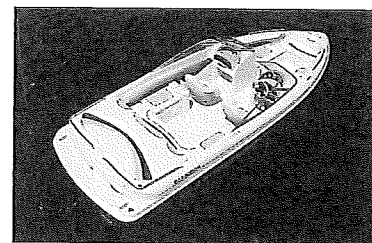

U-Shaped Seating (U)

Monthly Payments

Length of Loan	Interest Rate	Payment Per \$1000
3 years	7%	30.88
	8%	31.34
	9%	31.80
	10%	32.27
	11%	32.74
	12%	33.21
4 years	7%	23.95
	8%	24.41
	9%	24.89
	10%	25.36
	11%	25.85
	12%	26.33
5 years	7%	19.80
	8%	20.28
	9%	20.76
	10%	21.25
	11%	21.74
	12%	22.24
6 years	7%	17.05
	8%	17.53
	9%	18.03
	10%	18.53
	11%	19.03
	12%	19.55
7 years	7%	15.09
	8%	15.59
	9%	16.09
	10%	16.60
	11%	17.12
	12%	17.65
8 years	7%	13.63
	8%	14.14
	9%	14.65
	10%	15.17
	11%	15.71
	12%	16.25
9 years	7%	12.51
	8%	13.02
	9%	13.54
	10%	14.08
	11%	14.63
	12%	15.18
10 years	7%	11.61
	8%	12.13
	9%	12.67
	10%	13.22
	11%	13.78
	12%	14.35

Definitions of Measurements

Length Overall (LOA) — Distance along the centerline from the tip of the bow to the aft-most part of the hull.

Maximum Beam — Maximum width of the boat.

Transom Width — Maximum width of the boat at transom.

Depth — Vertical distance from lowest point of the keel to the highest point of the boat, excluding windshields, lights and other removable components.

Transom Deadrise — Angle of the hull, as measured in degrees, relative to the water.

Maximum Depth — Vertical distance from lowest point of the keel to the highest point of boat, including windshields.

Cockpit Depth — Vertical distance from boat floor to top of gunwale as measured at the driver's seat.

Length Overall on Trailer — Distance measured along the boat centerline, from forward-most point of trailer to aft-most point of motor/outdrive.

Boat Height on Trailer — Vertical distance from ground to highest point of boat, including windshield.

Draft (drive unit up) — Total number of inches of boat and/or motor and drive unit below the waterline. Measured unloaded, with the motor/drive unit in the full up position.

Draft (drive unit down) — Total number of inches of boat and/or motor and drive unit below the waterline. Measured unloaded, with the motor/drive unit in the full down position.

Specifications

LOA 17' 1" (5.21 m.)	Transom Deadrise 21°
Beam 88" (2.24 m.)	LOA on Trailer 21' 6" (6.55 m.)
Depth 43" (1.09 m.)	Fuel Capacity 23 gal. (87 L.)
Maximum Depth 59" (1.50 m.)	Maximum Load 1890 lbs. (857 kg.)
Cockpit Depth 28½" (.72 m.)	Max. Persons 8 or 1175 lbs. (533 kg.)
Approx. Wt. 1350 lbs. (612 kg.)	Maximum Horsepower 150 (112 kw.)
Transom Width 73¼" (1.86 m.)	NMMA Certified
Draft: A. Drive Unit Up 15½" (.39 m.)	
B. Drive Unit Down 28½" (.72 m.)	

Standard Features

Instrument panel includes: speedometer, tachometer, and fuel gauges; plus switches for bilge pump, navigation/anchor light, panel lights, horn, and accessories	6" cleats
Electric horn	Walk-thru curved windshield
Bilge pump	Wraparound hinged bow seats/storage
Navigation lighting	Stainless steel bow eye & stern eyes
AM/FM stereo cassette w/2 speakers	Passenger grab handles
Ski/kneeboard locker	Adjustable bucket/bench seating
Glove box	Molded swim platform
	Stainless steel boarding ladder
	Soft top w/concealed storage & boot
	Color-coordinated carpet

Options

Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain	Automatic bilge pump
Mooring cover	Dual cable steering
Cockpit cover	Convenience Package: hour meter, depth sounder
Bow cover	Tilt steering
Clarion stereo cassette w/2 speakers	Telescopic 3-step boarding ladder
Clarion stereo CD w/2 speakers	Ski tow pylon

Color Options

Azure Blue/White Laguna Teal/White Laser Red/White

Engine Options

OMC Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom, OMC Systems check

Mercury or Yamaha Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom

Mercury/Mariner 90 ELPTO*
Mercury/Mariner 115 ELPTO*
Mercury/Mariner 125 ELPTO*
Mercury/Mariner 135 L*
Mercury/Mariner 135 L Optimax*
Mercury/Mariner 150 L*
Mercury/Mariner 150 L Optimax*
Yamaha 90 TLRY*
Yamaha C 115 TLRY*
Yamaha 115 TLRY*
Yamaha 130 TLRY*
Yamaha 150 EFI TLRY*

* Engine will be shipped from Mercury Marine or Yamaha Marine; boat will be pre-rigged with Mercury/Mariner or Yamaha parts.

Performance

Engine: Johnson 115 FastStrike, Prop: 14 x 19

RPM	MPH	GPH	RANGE*
2500	15	2.9	107
3200	25	4.2	123
4200	35	6.3	115
WOT	43-45	—	—

0-20 MPH Acceleration: 3.5 sec.

Engine: Johnson 150 FastStrike, Prop: 14½ x 19

RPM	MPH	GPH	RANGE*
2400	15	3.7	84
3300	30	5.0	124
4500	40	7.5	110
WOT	49-52	—	—

0-20 MPH Acceleration: 3.25 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

SX 175 SX 175 Millennia

GLASTRON 2000

Specifications

LOA 17' 1" (5.21 m.)
 Beam 88" (2.24 m.)
 Depth 43" (1.09 m.)
 Maximum Depth 59" (1.50 m.)
 Cockpit Depth 28 1/2" (.72 m.)
 Approx. Wt. w/3.0 GS Volvo Penta 1980 lbs. (898 kg.)

Transom Width 73 1/4" (1.86 m.)
 Transom Deadrise 21°
 LOA on Trailer 21' 6" (6.55 m.)
 Fuel Capacity 23 gal. (87 L.)
 Maximum Load 1150 lbs. (518 kg.)
 Max. Persons 8 or 1150 lbs. (518 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.)
 B. Drive Unit Down 31" (.79 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories

Electric horn
 Bilge pump & blower
 Navigation lighting
 AM/FM stereo cassette w/2 speakers
 Ski/kneeboard locker
 Ski tow ring
 Stainless steel bow eye and stern eyes
 6" cleats

Walk-thru curved windshield
 Wraparound hinged bow seats/storage
 Bow anchor locker
 Passenger grab handles
 Fold-out sleeper seats w/aft jump seats
 Molded swim platform
 Stainless steel boarding ladder
 Soft top w/concealed storage & boat
 Merc/Volvo prop
 Glove box
 Color-coordinated carpet (SX 175 only)
 Fiberglass pan liner
 (SX 175 Millennia only)

Options

Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain
 Mooring cover
 Cockpit cover
 Bow cover
 Clarion stereo cassette w/2 speakers
 Clarion stereo CD w/2 speakers
 Convenience Package: hour meter, depth sounder

High altitude prop
 SL Seating: 2 bucket seats/aft bench seat/sunlounge
 Tilt steering
 Telescopic 3-step boarding ladder
 Automatic bilge pump
 Color-coordinated snap-in carpet
 (SX 175 Millennia only)

Colors-SX 175

Azure Blue/White Laguna Teal/White Laser Red/White

Colors-SX 175 Millennia

White w/Blue Graphics White w/Teal Graphics White w/Red Graphics

Engine Options

3.0L MerCruiser (WOPS) (135 hp) 3.0 GS Volvo Penta (WOPS) (135 hp)
 3.0L MerCruiser (WPS) (135 hp) 3.0 GS Volvo Penta (WPS) (135 hp)
 4.3L MerCruiser (190 hp) 4.3 GL Volvo Penta (190 hp)

Performance

Engine: 3.0 GS Volvo Penta, Prop: 13 1/2 x 19

RPM	MPH	GPH	RANGE*
2000	10	2.1	99
3000	20	3.2	129
4000	35	7.6	95
WOT	40-43	—	—

0-20 MPH Acceleration: 3.8 sec.

Engine: 4.3L MerCruiser, Prop: 13 1/2 x 23

RPM	MPH	GPH	RANGE*
2400	15	3.0	104
3200	35	5.0	145
4000	45	8.5	110
WOT	48-50	—	—

0-20 MPH Acceleration: 3.5 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____
 Motor _____ H.P. _____
 Trailer _____
 Accessories _____
 T, T & L _____
TOTAL PRICE \$ _____

Specifications

LOA 17' 1" (5.21 m.)
 Beam 88" (2.24 m.)
 Depth 43" (1.09 m.)
 Maximum Depth 59" (1.50 m.)
 Cockpit Depth 28 1/2" (.72 m.)
 Approx. Wt. w/3.0 GS Volvo Penta 1975 lbs. (896 kg.)

Transom Width 73 1/2" (1.86 m.)
 Transom Deadrise 21°
 LOA on Trailer 21' 6" (6.55 m.)
 Fuel Capacity 23 gal. (87 L.)
 Maximum Load 1025 lbs. (465 kg.)
 Max. Persons 7 or 1025 lbs. (465 kg.)
 NIMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.)
 B. Drive Unit Down 31" (.79 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories

Electric horn
 Bilge pump & blower
 Navigation lighting
 AM/FM stereo cassette w/2 speakers
 Ski/kneeboard locker
 Ski tow ring
 Lockable bow storage compartment
 Glove box
 Stainless steel bow eye & stern eyes

6" cleats
 Bow anchor locker
 Walk-thru curved windshield
 Passenger grab handle
 SL Seating: 2 bucket seats/aft bench seat/sunlounge
 Molded swim platform
 Stainless steel boarding ladder
 Soft top w/concealed storage & boot
 Merc/Volvo prop
 Stainless steel bow rails
 Color-coordinated carpet (SX 177 only)
 Fiberglass pan liner (SX 177 Millennium only)

Options

Canvas Package: side curtains, stern curtain
 Mooring cover
 Cockpit cover
 Clarion stereo cassette w/2 speakers
 Clarion stereo CD w/2 speakers
 Automatic bilge pump

High altitude prop
 Convenience Package: hour meter, depth sounder
 Telescopic 3-step boarding ladder
 Tilt steering
 Color-coordinated snap-in carpet (SX 177 Millennium only)

Colors-SX 177

Azure Blue/White Laguna Teal/White Laser Red/White

Colors-SX 177 Millennium

White w/Blue Graphics White w/Teal Graphics White w/Red Graphics

Engine Options

3.0L MerCruiser (WOPS) (135 hp) 3.0 GS Volvo Penta (WOPS) (135 hp)
 3.0L MerCruiser (WPS) (135 hp) 3.0 GS Volvo Penta (WPS) (135 hp)
 4.3L MerCruiser (190 hp) 4.3 GL Volvo Penta (190 hp)

Performance

Engine: 3.0 GS Volvo Penta, Prop: 14 1/2 x 19

RPM	MPH	GPH	RANGE*
2000	10	2.1	99
3000	20	3.2	129
4000	35	7.6	95
WOT	40-43	—	—

0-20 MPH Acceleration: 3.8 sec.

Engine: 4.3L MerCruiser, Prop: 13 1/2 x 23

RPM	MPH	GPH	RANGE*
2400	15	3.0	104
3200	35	5.0	145
4000	45	8.5	110
WOT	48-50	—	—

0-20 MPH Acceleration: 3.5 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

SX 195 SX 195 Millennia

GLASTRON 2000

Specifications

LOA 18' 7" (5.66 m.)
Beam 90 1/2" (2.31 m.)
Depth 47" (1.19 m.)
Maximum Depth 63" (1.60 m.)
Cockpit Depth 28 1/2" (.73 m.)
Approx. Wt. w/4.3L MerCruiser
2210 lbs. (1002 kg.)

Transom Width 75" (1.90 m.)
Transom Deadrise 21°
LOA on Trailer 22' (6.71 m.)
Fuel Capacity 35 gal. (132.5 L.)
Maximum Load 1275 lbs. (578 kg.)
Max. Persons 9 or 1275 lbs. (578 kg.)
NMMA Certified

Draft: A. Drive Unit Up 16 1/2" (.42 m.)
B. Drive Unit Down 31 1/2" (.80 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories

Electric horn
Bilge pump & blower
Navigation lighting
AM/FM stereo cassette w/2 speakers
Ski/kneeboard locker
Ski tow ring
Stainless steel bow eye & stern eyes
6" cleats

Walk-thru curved windshield
Wraparound hinged bow seats/storage
Passenger grab handles
Adjustable fold-out sleeper seats with aft jump seats
Molded swim platform
Stainless steel boarding ladder
Soft top w/concealed storage & boot
Merc/Volvo prop
Glove box
Color-coordinated carpet (SX 195 only)
Fiberglass pan liner (SX 195 Millennia only)

Options

Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain
Mooring cover
Cockpit cover
Bow cover
Clarion stereo cassette w/2 speakers
Clarion stereo CD w/2 speakers
Automatic bilge pump
High altitude prop

Convenience Package: hour meter, depth sounder
SL Seating: 2 bucket seats/aft bench seat/sunlounge
Tilt steering
Telescopic 3-step boarding ladder
Color-coordinated snap-in carpet (SX 195 Millennia only)

Colors-SX 195

Azure Blue/White Laguna Teal/White Laser Red/White

Colors-SX 195 Millennia

White w/Blue Graphics White w/Teal Graphics White w/Red Graphics

Engine Options

3.0L MerCruiser (WOPS) (135 hp) 3.0 GS Volvo Penta (WOPS) (135 hp)
3.0L MerCruiser (WPS) (135 hp) 3.0 GS Volvo Penta (WPS) (135 hp)
4.3L MerCruiser (190 hp) 4.3 GL Volvo Penta (190 hp)
5.0L MerCruiser (220 hp) 5.0 GL Volvo Penta (220 hp)

Performance

Engine: 4.3L MerCruiser, Prop: 13 1/2 x 23

RPM	MPH	GPH	RANGE*
2000	15	2.8	169
3000	25	3.8	207
4000	35	6.9	160
WOT	47-49	—	—

0-20 MPH Acceleration: 3.5 sec.

Engine: 5.0 GL Volvo Penta, Prop: 14 1/4 x 23

RPM	MPH	GPH	RANGE*
2500	15	3.5	135
3500	40	8.5	148
4000	45	9.8	145
WOT	51-53	—	—

0-20 MPH Acceleration: 3.3 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

SX 175 SF SX 175 SF Millennia

GLASTRON 2000

Specifications

LOA 17' 1" (5.21 m.)
 Beam 88" (2.24 m.)
 Depth 43" (1.09 m.)
 Maximum Depth 59" (1.50 m.)
 Cockpit Depth 28 1/2" (.72 m.)
 Approx. Wt. w/3.0L MerCruiser
 2035 lbs. (923 kg.)

Transom Width 73 1/2" (1.86 m.)
 Transom Deadrise 21°
 LOA on Trailer 21' 6" (6.55 m.)
 Fuel Capacity 23 gal. (87 L.)
 Maximum Load 1150 lbs. (518 kg.)
 Max. Persons 8 or 1150 lbs. (518 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.)
 B. Drive Unit Down 31" (.79 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights and accessories

Bow panel includes: aerator switch, voltmeter, tilt switch, battery charger switch, battery selector switch, trolling motor plug

Electric horn
 Bilge pump & blower
 Navigation lighting
 AM/FM stereo cassette w/2 speakers
 Ski/kneeboard locker
 Ski tow ring
 Stainless steel bow eye & stern eyes
 6" cleats
 Walk-thru curved windshield
 Glove box
 Passenger grab handles

Wraparound bow seating, converts to fishing deck
 Reversible bow seats/fishing deck
 2 adjustable bucket seats/2 removable fishing seats/bench seat
 Bow storage compartments
 Molded swim platform
 Stainless steel boarding ladder
 Convertible stem sundeck/fishing platform
 Soft top w/concealed storage & boot
 Aerated livewell
 Trolling motor mount
 Trolling motor battery trays
 Rod holder
 Tackle box trays
 Merc/Volvo prop
 Color-coordinated carpet
 (SX 175 SF only)
 Fiberglass pan liner
 (SX 175 SF Millennia only)

Options

Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain
 Mooring cover
 Cockpit cover
 Bow cover
 Clarion stereo cassette w/2 speakers
 Clarion stereo CD w/2 speakers
 Automatic bilge pump

Fishing Package: trolling motor, fish finder
 High altitude prop
 Convenience Package: hour meter, depth sounder
 Tilt steering
 Telescopic 3-step boarding ladder
 Color-coordinated snap-in carpet
 (SX 175 SF Millennia only)

Colors-SX 175 SF

Azure Blue/White Laguna Teal/White Laser Red/White

Colors-SX 175 SF Millennia

White w/Blue Graphics White w/Teal Graphics White w/Red Graphics

Engine Options

3.0L MerCruiser (WOPS) (135 hp)
 3.0L MerCruiser (WPS) (135 hp)
 4.3L MerCruiser (190 hp)

3.0 GS Volvo Penta (WOPS) (135 hp)
 3.0 GS Volvo Penta (WPS) (135 hp)
 4.3 GL Volvo Penta (190 hp)

Performance

Engine: 3.0L MerCruiser, Prop: 14 1/2 x 19

RPM	MPH	GPH	RANGE*
2000	10	2.1	99
3000	20	3.2	129
4000	35	7.6	95
WOT	39-41	—	—

0-20 MPH Acceleration: 3.9 sec.

Engine: 4.3 GL Volvo Penta, Prop: 14 1/2 x 23

RPM	MPH	GPH	RANGE*
2400	15	3.0	104
3200	35	5.0	145
4000	45	8.5	110
WOT	48-50	—	—

0-20 MPH Acceleration: 3.6 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 18' 7" (5.66 m.)
 Beam 90 3/4" (2.31 m.)
 Depth 49" (1.25 m.)
 Maximum Depth 61" (1.55 m.)
 Cockpit Depth 33" (.84 m.)
 Approx. Wt. w/4.3 GL Volvo Penta
 2350 lbs. (1066 kg.)

Transom Width 75" (1.90 m.)
 Transom Deadrise 21°
 LOA on Trailer 22' (6.71 m.)
 Fuel Capacity 35 gal. (132.5 L.)
 Maximum Load 1150 lbs. (521 kg.)
 Max. Persons 9 or 1150 lbs. (521 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 16 1/2" (.42 m.)
 B. Drive Unit Down 31 1/2" (.80 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories

Electric horn
 Automated bilge pump
 Navigation lighting
 AM/FM stereo cassette w/2 speakers
 Blower
 Ski tow ring
 Stainless steel bow eye & stern eyes
 Stainless steel bow rails
 6" cleats

Cabin light
 Lockable cabin door
 Walk-thru curved windshield
 V-berth w/storage
 Passenger grab handle
 Std. bucket seats/port sleeper w/aft jump seats
 Molded swim platform
 Stainless steel boarding ladder
 Soft top w/concealed storage & boot
 Merc/Volvo prop
 Bow rope locker
 Color-coordinated carpet
 Forward deck hatch w/screen

Options

Canvas Package: side curtains, stern curtain
 Mooring cover
 Cockpit cover
 Clarion stereo cassette w/2 speakers
 Clarion stereo CD w/2 speakers
 High altitude prop

Convenience Package: hour meter, depth sounder
 SL Seating: 2 bucket seats/aft bench seat/sunlounge
 Tilt steering
 Telescopic 3-step boarding ladder

Color Options

Azure Blue/White Laguna Teal/White Laser Red/White

Engine Options

3.0L MerCruiser (WOPS) (135 hp) 3.0 GS Volvo Penta (WOPS) (135 hp)
 3.0L MerCruiser (WPS) (135 hp) 3.0 GS Volvo Penta (WPS) (135 hp)
 4.3L MerCruiser (190 hp) 4.3 GL Volvo Penta (190 hp)

Performance

Engine: 4.3L MerCruiser, Prop: 13 1/2" x 23"

RPM	MPH	GPH	RANGE*
2000	15	2.8	169
3000	25	3.8	207
4000	35	6.9	160
WOT	46-48	—	—

0-20 MPH Acceleration: 3.6 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 15' 11 1/2" (4.86 m.)
 Beam 84" (2.13 m.)
 Depth 37" (.94 m.)
 Maximum Depth 42" (1.07 m.)
 Cockpit Depth 24" (.61 m.)
 Approx. Wt. 1050 lbs. (473 kg.)
 Transom Width 82" (2.08 m.)
 Draft: A. Drive Unit Up 15 1/2" (.39 m.)
 B. Drive Unit Down 28 1/2" (.72 m.)

Transom Deadrise 13°
 LOA on Trailer 20' 10" (6.35 m.)
 Fuel Capacity 16 gal. (60.6 L.)
 Maximum Load 1292 lbs. (581 kg.)
 Max. Persons 5 or 725 lbs. (326 kg.)
 Maximum Horsepower 120
 NMMA Certified

Standard Features

Instrument panel includes: speedometer, tachometer, fuel and trim gauges; plus switches for bilge pump, horn, navigation/anchor lights, panel lights, and accessories
 Electric horn
 Bilge pump
 Navigation lighting
 AM/FM stereo cassette w/2 speakers
 Glove box
 Kneeboard locker

Stainless steel bow eye & stern eyes
 4" cleats
 Smoked plexiglass windshield
 Bow seating area
 Bow storage compartments
 Passenger grab handle
 Bucket/bench seating
 Molded swim platform
 Stainless steel boarding ladder
 Rear ski storage rack

Options

Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain
 Cockpit cover
 Bow cover
 Mooring cover
 Dual cable steering

Clarion stereo w/4 speakers
 Clarion stereo CD w/4 speakers
 Ski tow pylon
 Automatic bilge pump
 Walk-thru curved full glass windshield
 Soft top w/boot (glass windshield only)

Color Options

White w/Blue/Yellow/Silver Graphics
 White w/Teal/Yellow/Silver Graphics

White w/Red/Yellow/Silver Graphics

Engine Options

OMC Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom, OMC systems check
 Mercury or Yamaha Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom

Mercury/Mariner 75 ELPTO*
 Mercury/Mariner 90 ELPTO*
 Mercury/Mariner 115 ELPTO*
 Yamaha 70 TLRY*
 Yamaha 90 TLRY*
 Yamaha C 115 TLRY*
 Yamaha 115 TLRY*

* Engine will be shipped from Mercury Marine or Yamaha Marine; boat will be pre-rigged with Mercury/Mariner or Yamaha parts.

Performance

Engine: 90 Johnson, Prop: 13 1/4 x 17

RPM	MPH	GPH	RANGE*
2500	15	2.5	86
3400	25	4.0	90
4600	35	6.0	84
WOT	42-44	—	—

0-20 MPH Acceleration: 3.3 sec.

Engine: 115 Johnson, Prop: 12 1/4 x 21

RPM	MPH	GPH	RANGE*
2500	15	3.4	64
3300	25	4.3	84
4700	35	7.0	72
WOT	46-48	—	—

0-20 MPH Acceleration: 3.2 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____
 Motor _____ H.P. _____
 Trailer _____
 Accessories _____
 T, T & L _____
TOTAL PRICE \$ _____

Specifications

LOA 17' 10" (5.40 m.)
 Beam 91" (2.30 m.)
 Depth 43" (1.09 m.)
 Maximum Depth 53" (1.35 m.)
 Cockpit Depth 29 1/2" (.75 m.)
 Approx. Wt. 1420 lbs. (646 kg.)
 Transom Width 86" (2.2 m.)

Transom Deadrise 20°
 LOA on Trailer 22' 2" (6.75 m.)
 Fuel Capacity 29 gal. (109.7 L.)
 Maximum Load 1725 lbs. (782 kg.)
 Max. Persons 8 or 1225 lbs. (556 kg.)
 Maximum Horsepower 150 (112 kw.)
 NMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.)
 B. Drive Unit Down 29" (.74 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, fuel and trim gauges; plus switches for bilge pump, horn, navigation/anchor lights, panel lights, and accessories

Electric horn

Navigation lighting

AM/FM stereo cassette w/2 speakers

Glove box w/built in cooler & overboard drain

Ski/kneeboard locker

Tilt steering

Dual cable steering

Bilge pump

Stainless steel bow eye & stern eyes

6" cleats

Walk-thru curved full glass windshield

Wraparound bow seats w/hinged bow backrest w/storage

Passenger grab handle

Adjustable buckets/bench seating

Molded swim platform

Stainless steel boarding ladder

Color-coordinated Sunbrella soft top & boot w/concealed storage

Gelcoat accent stripes

Courtesy lights

Options

Color-coordinated Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain

Mooring cover

Color-coordinated bow cover

Color-coordinated cockpit cover

Color-coordinated bimini top w/boot

Clarion stereo cassette w/4 speakers

Clarion stereo CD w/4 speakers

Ski tow pylon

Convenience Package: hour meter, depth sounder

Power antenna (Clarion stereos only)

Telescopic stern light

Automatic bilge pump

Telescopic 3-step boarding ladder

Color Options

Azure Blue/Beige Laguna Teal/Beige Laser Red/Beige

Engine Options

OMC Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom, OMC systems check

Mercury or Yamaha Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom

Mercury/Mariner 115 ELPTO*
 Mercury/Mariner 125 ELPTO*
 Mercury/Mariner 135 L*
 Mercury/Mariner 135 L Optimax*
 Mercury/Mariner 150 L*
 Mercury/Mariner 150 L Optimax*
 Yamaha C 115 TLR*
 Yamaha 115 TLR*
 Yamaha 130 TLR*
 Yamaha 150 EFI TLR*

* Engine will be shipped from Mercury Marine or Yamaha Marine; boat will be pre-rigged with Mercury/Mariner or Yamaha parts.

Performance

Engine: 90 Johnson, Prop: 13 1/4 x 17

RPM	MPH	GPH	RANGE*
2500	15	2.9	93
3400	25	4.2	107
4600	35	6.3	100
WOT	38-40	—	—

0-20 MPH Acceleration: 3.3 sec.

Engine: 115 Johnson, Prop: 12 1/4 x 21

RPM	MPH	GPH	RANGE*
2500	15	3.6	75
3300	25	4.6	98
4700	35	7.2	88
WOT	42-44	—	—

0-20 MPH Acceleration: 3.2 sec.

Engine: 135 Mercury (V6), Prop: 13 1/4 x 21

RPM	MPH	GPH	RANGE*
2400	15	4.2	64
3000	25	5.1	88
4000	35	7.1	89
WOT	46-49	—	—

0-20 MPH Acceleration: 3.1 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 18' (5.48 m.)
 Beam 91" (2.30 m.)
 Depth 43" (1.09 m.)
 Maximum Depth 53" (1.35 m.)
 Cockpit Depth 29½" (.75 m.)
 Approx. Wt. w/4.3 GL Volvo Penta
 2245 lbs. (987 kg.)

Transom Width 84" (2.13 m.)
 Transom Deadrise 20°
 LOA on Trailer 22' 4" (6.80 m.)
 Fuel Capacity 29 gal. (109.7 L.)
 Maximum Load 1275 lbs. (578 kg.)
 Max. Persons 8 or 1275 lbs. (578 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.)
 B. Drive Unit Down 31" (.79 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories

Electric horn
 Navigation lighting
 AM/FM stereo cassette w/2 speakers
 Glove box w/built in cooler & overboard drain
 Ski tow ring
 Ski/kneeboard locker
 Stainless steel bow eye & stern eyes
 Bilge pump & blower
 6" cleats

Wraparound bow seats w/hinged bow backrest w/storage
 Walk-thru curved full glass windshield
 Passenger grab handle
 Adjustable fold-out sleeper seats with aft jump seats
 Molded swim platform
 Stainless steel boarding ladder
 Color-coordinated Sunbrella soft top & boot w/concealed storage
 Gelcoat accent stripes
 Merc/Volvo prop
 Courtesy lights
 Tilt steering

Options

Color-coordinated Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain
 Mooring cover
 Color-coordinated cockpit cover
 Color-coordinated bow cover
 Color-coordinated bimini top w/boot
 High altitude prop
 Clarion stereo cassette w/4 speakers
 Clarion stereo CD w/4 speakers
 Automatic bilge pump

Telescopic 3-step boarding ladder
 SL Seating: 2 bucket seats/aft bench seat/sunlounge
 Adjustable starboard bucket/port sleeper seating/aft jump seats
 Convenience Package: hour meter, depth sounder
 Stainless steel stern rails
 Power antenna (Clarion stereos only)
 Telescopic stern light

Color Options

Azure Blue/Beige Laguna Teal/Beige Laser Red/Beige

Engine Options

3.0L MerCruiser (WOPS) (135 hp)
 3.0L MerCruiser (WPS) (135 hp)
 4.3L MerCruiser (190 hp)

3.0 GS Volvo Penta (WOPS) (135 hp)
 3.0 GS Volvo Penta (WPS) (135 hp)
 4.3 GL Volvo Penta (190 hp)

Performance

Engine: 3.0L MerCruiser, Prop: 13½ x 21

RPM	MPH	GPH	RANGE*
2100	15	2.5	108
2900	25	3.5	129
3500	35	7.4	85
WOT	42-44	—	—

0-20 MPH Acceleration: 3.4 sec.

Engine: 3.0 GS Volvo Penta, Prop: 15 x 17

RPM	MPH	GPH	RANGE*
2000	10	2.1	86
3000	20	3.2	113
4000	35	7.6	83
WOT	41-43	—	—

0-20 MPH Acceleration: 3.7 sec.

Engine: 4.3 GL Volvo Penta, Prop: 14 x 19

RPM	MPH	GPH	RANGE*
2200	15	3.0	90
2900	25	4.0	113
3400	35	7.9	80
WOT	48-50	—	—

0-20 MPH Acceleration: 3.2 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 19' 11" (6.10 m.)
 Beam 96" (2.80 m.)
 Depth 45 3/4" (1.16 m.)
 Maximum Depth 56 3/4" (1.40 m.)
 Cockpit Depth 32" (.80 m.)
 Approx. Wt. w/5.0 GL Volvo Penta
 2375 lbs. (1156 kg.)

Transom Width 92" (2.30 m.)
 Transom Deadrise 20°
 LOA on Trailer 24' 9" (7.50 m.)
 Fuel Capacity 35 gal. (132.5 L.)
 Maximum Load 1475 lbs. (669 kg.)
 Max. Persons 10 or 1475 lbs. (669 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 16 1/2" (.42 m.)
 B. Drive Unit Down 31 1/2" (.80 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories

Electric horn
 AM/FM stereo cassette w/2 speakers
 Glove box w/built in cooler & overboard drain
 Ski/kneeboard locker
 Ski tow ring
 Stainless steel bow eye & stern eyes
 6" cleats
 Walk-thru curved full glass windshield

Wraparound bow seats w/hinged bow backrest w/storage
 Courtesy lights
 Bilge pump & blower
 Passenger grab handle
 Adjustable fold-out sleeper seats w/aft jump seats
 Molded swim platform
 Stainless steel boarding ladder
 Color-coordinated Sunbrella soft top & boot w/concealed storage
 Gelcoat accent stripes
 Tilt steering
 Merc/Volvo prop

Options

Color-coordinated Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain
 Mooring cover
 Color-coordinated cockpit cover
 Color-coordinated bow cover
 Color-coordinated bimini top w/boot
 High altitude prop
 Clarion stereo cassette w/4 speakers
 Clarion stereo CD w/4 speakers
 Stainless steel prop (Merc only)
 Automatic bilge pump

Telescopic 3-step boarding ladder
 SL Seating: 2 bucket seats/aft bench seat/sunlounge
 Adjustable starboard bucket/port sleeper seating/aft jump seats
 Convenience Package: hour meter, depth sounder
 Stainless steel stern rails
 Power antenna (Clarion stereos only)
 Telescopic stern light
 U-shaped cockpit seating w/filler cushions

Color Options

Azure Blue/Beige Laguna Teal/Beige Laser Red/Beige

Engine Options

4.3L MerCruiser (190 hp)
 4.3L Bravo III MerCruiser (190 hp)
 5.0L MerCruiser (220 hp)
 5.0L EFI MerCruiser (240 hp)
 5.7L Bravo III MerCruiser (250 hp)
 5.7L EFI MerCruiser (260 hp)
 5.7L MerCruiser (250 hp)

4.3 GL Volvo Penta (190 hp)
 4.3 GL DP Volvo Penta (190 hp)
 5.0 GL Volvo Penta (220 hp)
 5.0 Gi Volvo Penta (250 hp)
 5.7 GS Volvo Penta (250 hp)
 5.7 GS DP Volvo Penta (250 hp)
 5.7 GSi Volvo Penta (260 hp)

Performance

Engine: 4.3L MerCruiser, Prop: 13 3/4 x 21

RPM	MPH	GPH	RANGE*
2400	15	3.0	153
3200	25	4.0	191
3700	35	7.9	136
WOT	46-48	—	—

0-20 MPH Acceleration: 3.3 sec.

Engine: 4.3 GL Volvo Penta, Prop: 14 x 19

RPM	MPH	GPH	RANGE*
2000	15	2.8	164
3000	25	3.8	201
4000	35	6.9	155
WOT	45-47	—	—

0-20 MPH Acceleration: 3.4 sec.

Engine: 5.7L MerCruiser, Prop: 14 x 19

RPM	MPH	GPH	RANGE*
2200	15	3.3	139
2800	25	4.3	178
3500	35	8.0	134
WOT	54-56	—	—

0-20 MPH Acceleration: 3.1 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____
 Motor _____ H.P. _____
 Trailer _____
 Accessories _____
 T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 22' (6.71 m.)
 Beam 101½" (2.58 m.)
 Depth 48" (1.22 m.)
 Maximum Depth 60" (1.52 m.)
 Cockpit Depth 34" (.86 m.)
 Approx. Wt. w/5.7L MerCruiser
 3350 lbs. (1519 kg.)

Transom Width 96" (2.43 m.)
 Transom Deadrise 20°
 LOA on Trailer 25' 10" (7.87 m.)
 Fuel Capacity 47 gal. (177.9 L.)
 Maximum Load 1555 lbs. (705 kg.)
 Max Persons 11 or 1555 lbs. (705 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 17½" (.44 m.)
 B. Drive Unit Down 33" (.84 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, navigation/anchor lights, panel lights, interior lights and horn; hour meter and depth sounder

Electric horn
 Navigation lighting
 Clarion stereo cassette w/4 speakers
 Glove box w/built in cooler & overboard drain
 Ski locker
 Ski tow ring
 Stainless steel bow eye & stern eyes
 6" cleats
 Bilge pump & blower
 Walk-thru curved full glass windshield

Wraparound bow seats w/hinged bow backrest w/storage
 Passenger grab handle
 SL Seating: 2 bucket seats/aft bench seat/sunlounge
 Molded swim platform
 Stainless steel telescopic 3-step boarding ladder
 Color-coordinated Sunbrella soft top & boot w/concealed storage
 Gelcoat accent stripes
 Merc/Volvo prop
 Tilt steering
 Premier Package: stainless steel bow and stern rails, stainless steel grab handles, power antenna, telescopic stern light
 Courtesy lights

Options

Color-coordinated Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain
 Mooring cover
 Color-coordinated cockpit cover
 Color-coordinated bow cover
 Color-coordinated bimini top w/boot
 Clarion stereo CD w/4 speakers

Clarion stereo CD remote ready w/4 speakers
 Deluxe U-shaped cockpit seating w/filler cushions
 Stainless steel prop (Merc only)
 High altitude prop
 Automatic bilge pump
 Snap-in carpet

Color Options

Azure Blue/Beige Laguna Teal/Beige Laser Red/Beige

Engine Options

5.0L MerCruiser (220 hp)
 5.0L EFI MerCruiser (240 hp)
 5.7L MerCruiser (250 hp)
 5.7L Bravo III MerCruiser (250 hp)
 5.7L EFI MerCruiser (260 hp)
 5.7L EFI Bravo III MerCruiser (260 hp)
 7.4L MPI Bravo I MerCruiser (310 hp)
 7.4L MPI Bravo III MerCruiser (310 hp)

5.0 GL Volvo Penta (220 hp)
 5.0 Gi Volvo Penta (250 hp)
 5.7 GS Volvo Penta (250 hp)
 5.7 GS DP Volvo Penta (250 hp)
 5.7 GSi Volvo Penta (280 hp)
 7.4 Gi Volvo Penta (310 hp)
 7.4 Gi DP Volvo Penta (310 hp)

Performance

Engine: 5.7 GS Volvo Penta, Prop: 14 x 19

RPM	MPH	GPH	RANGE*
3000	30	7.6	167
3500	36	9.8	156
4000	41	12.7	137
WOT	48-50	—	—

0-20 MPH Acceleration: 3.7 sec.

Engine: 7.4L MerCruiser, Prop: 23 Mirage

RPM	MPH	GPH	RANGE*
3000	32	10.5	129
3500	38	14.2	113
4000	44	20.5	91
WOT	56-58	—	—

0-20 MPH Acceleration: 3.3 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 19' 11" (6.10 m.)
 Beam 96" (2.40 m.)
 Depth 45 3/4" (1.16 m.)
 Maximum Depth 56 3/4" (1.40 m.)
 Cockpit Depth 32" (.80 m.)
 Approx. Wt. w/5.0 GL Volvo Penta
 2375 lbs. (1077 kg.)

Transom Width 92" (2.30 m.)
 Transom Deadrise 20°
 LOA on Trailer 24' 9" (7.50 m.)
 Fuel Capacity 35 gal. (132.5 L.)
 Maximum Load 1475 lbs. (669 kg.)
 Max. Persons 10 or 1475 lbs. (669 kg.)
 NIMMA Certified

Draft: A. Drive Unit Up 16 1/2" (.42 m.)
 B. Drive Unit Down 31 1/2" (.80 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights, and accessories

Wraparound bow seats w/hinged bow backrest w/storage
 Courtesy lights
 Bilge pump & blower
 Passenger grab handle
 Electric horn
 SL seating: 2 adjustable bucket seats/aft bench seat/sunlounge
 Molded swim platform
 Flip-up bucket seat cushions
 Color-coordinated Sunbrella bimini top w/boot

Color-coordinated cockpit cover
 Docking lights
 Mooring cover
 Stainless steel prop (Merc only)
 High altitude prop
 Porta-pottie

Color-coordinated bow cover
 Docking lights
 Mooring cover
 Stainless steel prop (Merc only)
 High altitude prop
 Porta-pottie

Color-coordinated cockpit cover

Options

Collector's Edition Package #1: 12V air compressor, 12V carry-on refrigerator and charge guard
 Collector's Edition Package #2: handheld spot light, 12V wet/dry sport vac & 4 dock fenders w/storage
 Color-coordinated cockpit cover

Color Options

Beige/Forest Green w/Gold accents

Engine Options

5.0L MerCruiser (220 hp)
 5.0L EFI MerCruiser (240 hp)
 5.7L MerCruiser (250 hp)
 5.7L Bravo III MerCruiser (250 hp)
 5.7L EFI MerCruiser (260 hp)

5.0 GL Volvo Penta (220 hp)
 5.0 Gi Volvo Penta (250 hp)
 5.7 GS Volvo Penta (250 hp)
 5.7 GS DP Volvo Penta (250 hp)
 5.7 GSi Volvo Penta (260 hp)

Performance

Engine: 4.3L MerCruiser, Prop: 13 1/2 x 21

RPM	MPH	GPH	RANGE*
2400	15	3.0	153
3200	25	4.0	191
3700	35	7.9	136
WOT	44-47	—	—

0-20 MPH Acceleration: 3.3 sec.

Engine: 4.3 GL Volvo Penta, Prop: 14 x 19

RPM	MPH	GPH	RANGE*
2000	15	2.8	164
3000	25	3.8	201
4000	35	6.9	155
WOT	43-46	—	—

0-20 MPH Acceleration: 3.4 sec.

Engine: 5.7L MerCruiser, Prop: 14 x 19

RPM	MPH	GPH	RANGE*
2200	15	3.3	139
2800	25	4.3	178
3500	35	8.0	134
WOT	52-55	—	—

0-20 MPH Acceleration: 3.1 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 15' 11 1/2" (4.86 m.)
 Beam 84" (2.13 m.)
 Depth 37" (.94 m.)
 Maximum Depth 42" (1.07 m.)
 Cockpit Depth 24" (.61 m.)
 Approx. Wt. 1050 lbs. (473 kg.)
 Transom Width 82" (2.08 m.)
 Draft: A. Drive Unit Up 15 1/2" (.39 m.)
 B. Drive Unit Down 28 1/2" (.72 m.)

Transom Deadrise 13°
 LOA on Trailer 20' 10" (6.35 m.)
 Fuel Capacity 16 gal. (60.6 L.)
 Maximum Load 1292 lbs. (581 kg.)
 Max. Persons 5 or 725 lbs. (326 kg.)
 Maximum Horsepower 120
 NMMA Certified

Standard Features

Instrument panel includes: speedometer, tachometer, fuel and trim gauges; plus switches for bilge pump, horn, navigation/anchor lights, panel lights, and accessories
 Bow panel includes: aerator switch and trolling motor plug
 Electric horn
 Bilge pump
 Navigation lighting
 AM/FM stereo cassette w/2 speakers
 Glove box
 2 removable fishing seats/aft bench seating

Passenger grab handle
 Stainless steel bow eye & stern eyes
 4" cleats
 Walk-thru curved full glass windshield
 Bow seating area
 Bow storage compartments
 Aerated livewell
 Tackle box trays
 Ski/kneeboard locker
 Molded swim platform
 Stainless steel boarding ladder
 Bow converts to fishing deck
 Trolling motor mount

Options

Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain
 Cockpit cover
 Mooring cover
 Dual cable steering
 Clarion stereo w/2 speakers

Clarion stereo CD w/2 speakers
 Ski tow pylon
 Automatic bilge pump
 Soft top w/boot
 Fishing Package: fish finder, trolling motor, and battery trays

Color Options

White w/Blue/Silver Graphics
 White w/Teal/Silver Graphics

White w/Red/Silver Graphics

Engine Options

OMC Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom, OMC systems check
 Mercury or Yamaha Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom

Mercury/Mariner 75 ELPTO*
 Mercury/Mariner 90 ELPTO*
 Mercury/Mariner 115 ELPTO*
 Yamaha 70 TLRY*
 Yamaha 90 TLRY*
 Yamaha C 115 TLRY*
 Yamaha 115 TLRY*

* Engine will be shipped from Mercury Marine or Yamaha Marine; boat will be pre-rigged with Mercury/Mariner or Yamaha parts.

Performance

Engine: 90 Johnson, Prop: 13 1/4 x 17

RPM	MPH	GPH	RANGE*
2500	15	2.5	86
3400	25	4.0	90
4600	35	6.0	84
WOT	42-44	—	—

0-20 MPH Acceleration: 3.7 sec.

Engine: 115 Johnson, Prop: 12 1/4 x 21

RPM	MPH	GPH	RANGE*
2500	15	3.4	64
3300	25	4.3	84
4700	35	7.0	72
WOT	46-48	—	—

0-20 MPH Acceleration: 3.5 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____
 Motor _____ H.P. _____
 Trailer _____
 Accessories _____
 T, T & L _____
TOTAL PRICE \$ _____

Specifications

LOA 17' 10" (5.40 m.)
 Beam 91" (2.30 m.)
 Depth 43" (1.09 m.)
 Maximum Depth 53" (1.35 m.)
 Cockpit Depth 29½" (.75 m.)
 Approx. Wt. 1425 lbs. (646 kg.)
 Transom Width 86" (2.20 m.)

Transom Deadrise 20°
 LOA on Trailer 22' 2" (6.71 m.)
 Fuel Capacity 29 gal. (109.7 L.)
 Maximum Load 1725 lbs. (782 kg.)
 Max. Persons 8 or 1225 lbs. (556 kg.)
 Maximum Horsepower 150 (112 kw.)
 NMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.)
 B. Drive Unit Down 29" (.74 m.)

Standard Features

Instrument panel includes:
 speedometer, tachometer, fuel & trim gauges; plus switches for bilge pump, navigation/anchor lights, panel lights, horn, & accessories

Bow panel includes: aerator switch, voltmeter, tilt switch, battery charger switch, battery selector switch, trolling motor plug

Electric horn
 Navigation lighting
 AM/FM stereo cassette w/2 speakers
 Glove box
 Ski/kneeboard locker
 6" cleats
 Stainless steel bow eye & stern eyes
 Walk-thru curved open glass windshield
 Bilge pump & blower
 Courtesy lights

Reversible bow seats/fishing deck
 Wraparound bow seats w/hinged bow backrest w/storage
 2 adjustable bucket seats/2 removable fishing seats/aft bench seating
 Bow storage compartments
 Passenger grab handle
 Molded swim platform
 Stainless steel boarding ladder
 Color-coordinated Sunbrella soft top & boot with concealed storage
 Gelcoat accent stripes
 Aerated livewell
 Molded trolling motor mount
 Trolling motor battery trays
 Rod holders
 Tackle box trays
 Dual cable steering
 Removable ice chest

Options

Color-coordinated Canvas Package:
 bow cover, walk-thru curtain, side curtains, stern curtain

Mooring cover
 Color-coordinated cockpit cover
 Color-coordinated bow cover
 Color-coordinated bimini top w/boot
 Fishing Package: trolling motor, fish finder
 Ski tow pylon

Telescopic 3-step boarding ladder
 Convenience Package: hour meter, depth sounder
 Power antenna (Clarion stereos only)
 Tilt steering
 Clarion stereo cassette w/4 speakers
 Clarion stereo CD w/4 speakers
 Automatic bilge pump

Color Options

Azure Blue/Beige LagunaTeal/Beige Laser Red/Beige

Engine Options

OMC Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom, OMC systems check

Mercury or Yamaha Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom

Mercury/Mariner 115 ELPTO*
 Mercury/Mariner 125 ELPTO*
 Mercury/Mariner 135 L*
 Mercury/Mariner 135 L Optimax*
 Mercury/Mariner 150 L*
 Mercury/Mariner 150 L Optimax*
 Yamaha C 115 TLRY*
 Yamaha 115 TLRY*
 Yamaha 130 TLRY*
 Yamaha 150 EFI TLRY*

* Engine will be shipped from Mercury Marine or Yamaha Marine; boat will be pre-rigged with Mercury/Mariner or Yamaha parts.

Performance

Engine: 90 Johnson, Prop: 13½ x 17

RPM	MPH	GPH	RANGE*
2500	15	2.9	93
3400	25	4.2	107
4600	35	6.3	100
WOT	38-40	—	—

0-20 MPH Acceleration: 3.3 sec.

Engine: 115 Johnson, Prop: 12½ x 21

RPM	MPH	GPH	RANGE*
2500	15	3.6	75
3300	25	4.6	98
4700	35	7.2	88
WOT	42-44	—	—

0-20 MPH Acceleration: 3.2 sec.

Engine: 135 Mercury (V6), Prop: 13½ x 21

RPM	MPH	GPH	RANGE*
2400	15	4.2	64
3000	25	5.1	88
4000	35	7.1	89
WOT	46-49	—	—

0-20 MPH Acceleration: 3.1 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 18' (5.48 m.)
 Beam 91" (2.30 m.)
 Depth 43" (1.09 m.)
 Maximum Depth 53" (1.35 m.)
 Cockpit Depth 29½" (.75 m.)
 Approx. Wt. w/4.3 GL Volvo Penta
 2495 lbs. (987 kg.)

Transom Width 84" (2.13 m.)
 Transom Deadrise 20°
 LOA on Trailer 22' 4" (6.80 m.)
 Fuel Capacity 29 gal. (109.7 L.)
 Maximum Load 1275 lbs. (578 kg.)
 Max. Persons 8 or 1275 lbs. (578 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 16½" (.42 m.)
 B. Drive Unit Down 31½" (.80 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights and accessories

Bow panel includes: aerator switch, voltmeter, tilt switch, battery charger switch, battery selector switch, trolling motor plug

Electric horn

Navigation lighting

AM/FM stereo cassette w/2 speakers

Glove box w/built-in cooler & overboard drain

Ski/kneeboard locker

Ski tow ring

Stainless steel bow eye & stern eyes

6" cleats

Walk-thru curved open glass windshield

Bilge pump & blower

Courtesy lights

Reversible bow seats/fishing deck

Wraparound bow seats w/hinged bow backrest w/storage

2 adjustable bucket seats/2 removable fishing seats/aft bench seating

Bow storage compartments

Passenger grab handle

Molded swim platform

Stainless steel boarding ladder

Convertible stem sundeck/fishing platform

Color-coordinated Sunbrella soft top & boot w/storage concealed

Gelcoat accent stripes

Aerated livewell

Molded trolling motor mount

Trolling motor battery trays

Rod holders

Tackle box trays

Merc/Volvo prop

Removable ice chest

Options

Color-coordinated Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain

Mooring cover

Color-coordinated cockpit cover

Color-coordinated bow cover

Color-coordinated bimini top w/boot

Fishing Package: trolling motor, fish finder

Telescopic 3-step boarding ladder

High altitude prop

Convenience Package: hour meter, depth sounder

Tilt steering

Power antenna (Clarion stereos only)

Clarion stereo cassette w/4 speakers

Clarion stereo CD w/4 speakers

Automatic bilge pump

Color Options

Azure Blue/Beige Laguna Teal/Beige Laser Red/Beige

Engine Options

3.0L MerCruiser (WOPS) (135 hp) 3.0 GS Volvo Penta (WOPS) (135 hp)
 3.0L MerCruiser (WPS) (135 hp) 3.0 GS Volvo Penta (WPS) (135 hp)
 4.3L MerCruiser (190 hp) 4.3 GL Volvo Penta (190 hp)

Performance

Engine: 3.0L MerCruiser, Prop: 13½ x 21

RPM	MPH	GPH	RANGE*
2100	15	2.5	108
2900	25	3.5	129
3500	35	7.4	85
WOT	42-44	—	—

0-20 MPH Acceleration: 3.4 sec.

Engine: 3.0 GS Volvo Penta, Prop: 15 x 17

RPM	MPH	GPH	RANGE*
2000	10	2.1	86
3000	20	3.2	113
4000	35	7.6	83
WOT	41-43	—	—

0-20 MPH Acceleration: 3.7 sec.

Engine: 4.3 GL Volvo Penta, Prop: 14 x 19

RPM	MPH	GPH	RANGE*
2200	15	3.0	90
2900	25	4.0	113
3400	35	7.9	80
WOT	48-50	—	—

0-20 MPH Acceleration: 3.2 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 19' 11" (6.10 m.)
 Beam 96" (2.80 m.)
 Depth 45 1/4" (1.16 m.)
 Maximum Depth 56 1/2" (1.40 m.)
 Cockpit Depth 32" (.80 m.)
 Approx. Wt. w/5.0 GL Volvo Penta 2585 lbs. (1156 kg.)
 Transom Width 92" (2.30 m.)
 Transom Deadrise 20°
 LOA on Trailer 24' 9" (7.50 m.)
 Fuel Capacity 35 gal. (132.5 L.)
 Maximum Load 1475 lbs. (669 kg.)
 Max. Persons 10 or 1475 lbs. (669 kg.)
 NMMA Certified
 Draft: A. Drive Unit Up 16 1/2" (.42 m.)
 B. Drive Unit Down 31 1/2" (.80 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump blower, horn, lights and accessories
 Bow panel includes: aerator switch, voltmeter, tilt switch, battery charger switch, battery selector switch, trolling motor plug
 Electric horn
 Navigation lighting
 AM/FM stereo cassette w/2 speakers
 Glove box w/built-in cooler & overboard drain
 Ski/kneeboard locker
 Ski tow ring
 Stainless steel bow eyes & stern eyes
 6" cleats
 Walk-thru curved open glass windshield
 Bilge pump & blower
 Removable ice chest
 Reversible bow seats/fishing deck
 Wraparound bow seats w/hinged bow backrest w/storage
 2 adjustable bucket seats/2 removable fishing seats/aft bench seating
 Bow storage compartments
 Passenger grab handle
 Molded swim platform
 Stainless steel boarding ladder
 Convertible stern sundeck/fishing platform
 Color-coordinated Sunbrella soft top & boot w/concealed storage
 Aerated livewell
 Molded trolling motor mount
 Trolling motor battery trays
 Rod holders
 Tackle box trays
 Merc/Volvo prop
 Courtesy lights

Options

Color-coordinated Canvas Package: bow cover, walk-thru curtain, side curtains, stern curtain
 Automatic bilge pump
 Mooring cover
 Color-coordinated bimini top w/boot
 Color-coordinated cockpit cover
 Color-coordinated bow cover
 Clarion stereo cassette w/4 speakers
 Clarion stereo CD w/4 speakers
 Fishing Package: trolling motor, fish finder
 High altitude prop
 Power antenna (Clarion stereos only)
 Stainless steel prop (Merc. only)
 Convenience Package: hour meter, depth sounder
 Tilt steering
 Telescopic 3-step boarding ladder

Color Options

Azure Blue/Beige Laguna Teal/Beige Laser Red/Beige

Engine Options

4.3L MerCruiser (190 hp)
 4.3L Bravo III MerCruiser (190 hp)
 5.0L MerCruiser (220 hp)
 5.0L EFI MerCruiser (240 hp)
 5.7L MerCruiser (250 hp)
 5.7L Bravo III MerCruiser (250 hp)
 5.7L EFI MerCruiser (260 hp)
 4.3 GL Volvo Penta (190 hp)
 4.3 GL DP Volvo Penta (190 hp)
 5.0 GL Volvo Penta (220 hp)
 5.0 GI Volvo Penta (250 hp)
 5.7 GS Volvo Penta (250 hp)
 5.7 GS DP Volvo Penta (250 hp)
 5.7 GSI Volvo Penta (280 hp)

Performance

Engine: 4.3L MerCruiser, Prop: 13 1/4 x 21

RPM	MPH	GPH	RANGE*
2400	15	3.0	153
3200	25	4.0	191
3700	35	7.9	136
WOT	45-47	—	—

0-20 MPH Acceleration: 3.3 sec.

Engine: 4.3 GL Volvo Penta, Prop: 14 x 19

RPM	MPH	GPH	RANGE*
2000	15	2.8	164
3000	25	3.8	201
4000	35	6.9	155
WOT	44-46	—	—

0-20 MPH Acceleration: 3.4 sec.

Engine: 5.7L MerCruiser, Prop: 14 x 19

RPM	MPH	GPH	RANGE*
2200	15	3.3	139
2800	25	4.3	178
3500	35	8.0	134
WOT	52-54	—	—

0-20 MPH Acceleration: 3.1 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____
 Motor _____ H.P. _____
 Trailer _____
 Accessories _____
 T, T & L _____
TOTAL PRICE \$ _____

Specifications

LOA 20' 13" (6.13 m.)
 Beam 94 1/4" (2.39 m.)
 Depth 50" (1.27 m.)
 Maximum Depth 71" (1.80 m.)
 Cockpit Depth 35 1/2" (.90 m.)
 Approx. Wt. w/5.7 GS Volvo Penta
 2852 lbs. (1283 kg.)

Transom Width 90" (2.29 m.)
 Transom Deadrise 19°
 LOA on Trailer 24' 8" (7.50 m.)
 Fuel Capacity 45 gal. (170.3 L.)
 Maximum Load 1450 lbs. (655 kg.)
 Max. Persons 8 or 1150 lbs. (518 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 18 1/2" (.46 m.)
 B. Drive Unit Down 33" (.84 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, horn, lights and accessories

Electric horn

Automatic bilge pump

Blower

Navigation lighting

AM/FM stereo cassette w/2 speakers

Floor storage area

Ski tow ring

Stainless steel bow eye & stern eyes

Tilt steering

Lockable cabin door

6" cleats

Walk-thru curved full glass windshield

Bow access step

Bow anchor locker

Passenger grab handle

Molded swim platform

Stainless steel boarding ladder

Color-coordinated Sunbrella soft top & boot w/concealed storage

Gelcoat accent stripes

Merc/Volvo prop

BS Seating: starboard bucket/port sleeper/aft jump seats

Stainless steel bow & stern rails

Helm storage locker

Options

Color-coordinated Canvas Package: side curtains, stern curtain

Mooring cover

Color coordinated cockpit cover

Clarion stereo cassette w/2 speakers

Clarion stereo CD w/2 speakers

Porta-pottie

Color-coordinated Camper Canvas Package: includes Canvas Package less stern curtain, plus aft camper top, aft camper side curtains, aft camper stern curtain

Galley Package: alcohol stove, ice box, sink, water system, dual helm seat & aft jump seats

SL Seating: 2 bucket seats/aft bench seat/sunlounge (Galley Package not available in this seating option)

Stainless steel prop (Merc only)

Telescopic stern light

Telescopic 3-step boarding ladder

High altitude prop

Convenience Package: hour meter, depth sounder

Color Options

Azure Blue/White Laguna Teal/White Laser Red/White

Engine Options

4.3L MerCruiser (190 hp) 4.3 GL Volvo Penta (190 hp)
 4.3L Bravo III MerCruiser (190 hp) 4.3 GL DP Volvo Penta (190 hp)
 5.0L MerCruiser (220 hp) 5.0 GL Volvo Penta (220 hp)
 5.0L EFI MerCruiser (240 hp) 5.0 Gi Volvo Penta (250 hp)
 5.7L MerCruiser (250 hp) 5.7 GS Volvo Penta (250 hp)
 5.7L Bravo III MerCruiser (250 hp) 5.7 GS DP Volvo Penta (250 hp)
 5.7L EFI MerCruiser (260 hp) 5.7 GSI Volvo Penta (280 hp)

Performance

Engine: 4.3L MerCruiser, Prop: 13 1/4 x 21

RPM	MPH	GPH	RANGE*
2400	15	3.0	203
3200	25	4.0	253
3700	35	7.9	180
WOT	44-46	—	—

0-20 MPH Acceleration: 3.5 sec.

Engine: 4.3 GL Volvo Penta, Prop: 14 x 19

RPM	MPH	GPH	RANGE*
2000	15	2.8	217
3000	25	3.8	266
4000	35	6.9	205
WOT	43-45	—	—

0-20 MPH Acceleration: 3.6 sec.

Engine: 5.7L MerCruiser, Prop: 14 x 19

RPM	MPH	GPH	RANGE*
2200	15	3.3	184
2800	25	4.3	235
3500	35	8.0	177
WOT	51-53	—	—

0-20 MPH Acceleration: 3.3 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat _____ \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 22' 7" (6.92 m.)
 Beam 96" (2.43 m.)
 Depth 64" (1.63 m.)
 Maximum Depth 75" (1.91 m.)
 Cockpit Depth 36" (.91 m.)
 Approx. Wt. w/5.7 GS Volvo Penta 3350 lbs. (1519 kg.)

Transom Width 93" (2.36 m.)
 Transom Deadrise 22°
 LOA on Trailer 26' 4" (8.03 m.)
 Fuel Capacity 47 gal. (177.9 L.)
 Maximum Load 1950 lbs. (878 kg.)
 Max. Persons 12 or 1950 lbs. (878 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 18" (.46 m.)
 B. Drive Unit Down 36" (.91 m.)

Standard Features

Instrument panel includes:
 speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, lights and horn; hour meter and depth sounder

Horn

Automatic bilge pump

Blower

Clarion stereo cassette w/4 speakers

Welded stainless bow rails

Stainless steel bow eye & stern eyes

6" cleats

Ski tow ring

Bow anchor locker

Cabin lounge seats (2)

Glove box

Lockable sliding cabin door

Walk-thru curved full glass windshield

BS Seating: starboard bucket/port sleeper/aft bench seat

Porta-pottie

Molded swim platform

Stainless steel telescopic 3-step boarding ladder

Color-coordinated Sunbrella bimini top & boot

Gelcoat accent stripes

Merc/Volvo prop

Tilt steering

Floor storage area

Deck hatch with screen

Removable ice chest

Full fiberglass cockpit liner

Options

Galley Package: stainless steel sink, 5-gal. water system, alcohol stove

Color-coordinated Canvas Package for bimini top: side curtains, stern curtains, forward clear connector curtain

Color-coordinated cockpit cover

Mooring cover

Dual battery switch & trays

Color-coordinated Camper Canvas Package: includes Canvas Package less stern curtain, plus aft camper top, aft camper side curtains, aft camper stern curtain

Compass

Snap-in carpet

Starboard windshield wiper

Vented cabin windows

High altitude prop

SL Seating: 2 bucket seats/aft bench seat/convertible sunlounge

Stainless steel prop (Merc only)

Telescopic stern light

Clarion stereo CD w/4 speakers

Clarion stereo CD remote ready w/4 speakers

Color Options

Azure Blue/White Laguna Teal/White Laser Red/White

Engine Options

5.0L MerCruiser (220 hp)
 5.0L EFI MerCruiser (240 hp)
 5.7L MerCruiser (250 hp)
 5.7L Bravo III MerCruiser (250 hp)
 5.7L EFI MerCruiser (260 hp)
 7.4L MPI Bravo I MerCruiser (310 hp)
 7.4L MPI Bravo III MerCruiser (310 hp)

5.0 GL Volvo Penta (220 hp)
 5.0 Gi Volvo Penta (250 hp)
 5.7 GS Volvo Penta (250 hp)
 5.7 GS DP Volvo Penta (250 hp)
 5.7 GSi Volvo Penta (250 hp)
 5.7 GSi DP Volvo Penta (280 hp)
 7.4 Gi Volvo Penta (310 hp)
 7.4 Gi DP Volvo Penta (310 hp)

Performance

Engine 5.7 GS Volvo Penta, Prop: 14 x 19

RPM	MPH	GPH	RANGE*
3000	30	7.6	167
3500	36	9.8	156
4000	41	12.7	137
WOT	49-51	—	—

0-20 MPH Acceleration: 3.7 sec.

Engine 7.4L MerCruiser, Prop: 23 Mirage

RPM	MPH	GPH	RANGE*
3000	32	10.5	129
3500	38	14.2	113
4000	44	20.5	91
WOT	56-59	—	—

0-20 MPH Acceleration: 3.3 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.
 *Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat _____ \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

GS 249

Specifications

LOA 24' 10" (7.57 m.)
 Beam 102" (2.59 m.)
 Depth 80 1/2" (2.04 m.)
 Maximum Depth 91" (2.31 m.)
 Cockpit Depth 35" (.89 m.)
 Approx. Wt. w/5.7 GS Volvo Penta 4437 lbs. (1997 kg.)

Transom Deadrise 20°
 Transom Width 98 1/2" (2.50 m.)
 LOA on Trailer 26' 10" (8.18 m.)
 Fuel Capacity 56 gal. (211.7 L.)
 Maximum Load 2240 lbs. (1008 kg.)
 Max. Persons 16 or 2240 lbs. (1008 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 17" (.42 m.)
 B. Drive Unit Down 35" (.89 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, navigation/anchor lights, panel lights, interior lights and horn; hour meter and depth sounder

Horn/blower/compass
 Automatic bilge pump
 Translucent deck hatch w/screen
 Clarion stereo cassette w/4 speakers
 Welded stainless steel rails
 Bow pulpit with roller & bow rope locker
 Stainless steel bow eye & stern eyes
 Stainless steel cleats
 Walkaround deck
 Walk-thru curved full glass windshield
 18-gallon water tank

Main cabin includes: enclosed head with 4-gallon porta-pottie, fiberglass shower stall, hanging clothes locker, cabin table, cabin courtesy lights, ice box, alcohol stove, and on-demand water faucet
 Molded swim platform/stainless steel telescopic 3-step boarding ladder
 Color-coordinated Sunbrella bimini top w/boot
 Gelcoat accent stripes
 Merc/Volvo prop
 Cockpit area includes: deluxe captain's chair, L-shaped passenger seating with double-wide fold-out sunlounge, stern storage compartment & walk-thru transom w/gate
 Vented cabin windows
 Tilt steering

Options

Color-coordinated Camper Canvas Package includes: Canvas Package less stern curtain, plus aft camper top, aft camper side curtains, aft camper stern curtains

Color-coordinated Canvas Package for bimini top: side curtains, aft curtain, clear connector

Color-coordinated cockpit cover
 Snap-in carpet
 Dual battery switch & trays
 Manual china head with pump-out
 Hydraulic trim tabs

Remote control spotlight
 Transom shower
 Starboard windshield wiper
 High altitude prop
 Stainless steel prop (Merc only)
 Clarion stereo CD w/4 speakers
 Clarion stereo CD remote ready w/4 speakers
 Galley Package: microwave oven, 12/110V refrigerator, alcohol/electric stove, hot water heater, 110V dockside power

Color Options

Azure Blue/White Laguna Teal/White Laser Red/White

Engine Options

5.0L MerCruiser (220 hp)
 5.0L EFI MerCruiser (240 hp)
 5.7L MerCruiser (250 hp)
 5.7L Bravo III MerCruiser (250 hp)
 5.7L EFI MerCruiser (260 hp)
 7.4L MPI Bravo I MerCruiser (310 hp)
 7.4L MPI Bravo III MerCruiser (310 hp)

5.0 GL Volvo Penta (220 hp)
 5.0 Gi Volvo Penta (250 hp)
 5.7 GS Volvo Penta (250 hp)
 5.7 GS DP Volvo Penta (250 hp)
 5.7 GSi Volvo Penta (250 hp)
 7.4 Gi Volvo Penta (310 hp)
 7.4 Gi DP Volvo Penta (310 hp)

Performance

Engine: 5.0 GL Volvo Penta, Prop: 15 x 17		GPH	RANGE*
RPM	MPH		
2500	15	7.4	102
3400	25	10.7	118
4600	35	13.2	134
WOT	38-41	—	—

0-20 MPH Acceleration: 3.6 sec.

Engine: 7.4L MerCruiser, Prop: 23 Mirage		GPH	RANGE*
RPM	MPH		
2500	15	10.5	72
3300	25	13.5	93
4200	35	18.5	95
WOT	46-49	—	—

0-20 MPH Acceleration: 2.9 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.
 *Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 17' 6" (5.36 m.)	Transom Deadrise 20°
Beam 92" (2.35 m.)	LOA on Trailer 21' 6" (6.55 m.)
Depth 47" (1.19 m.)	Fuel Capacity 31 gal. (117.4 L.)
Maximum Depth 52" (1.33 m.)	Maximum Load 1700 lbs. (765 kg.)
Cockpit Depth 30" (.77 m.)	Max. Persons 7 or 1050 lbs. (518 kg.)
Approx. Wt. 1350 lbs. (612 kg.)	Maximum Horsepower 175
Transom Width 88" (2.24 m.)	NMMA Certified
Draft: A. Drive Unit Up 16½" (.42 m.)	B. Drive Unit Down 30" (.77 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, fuel and trim gauges; plus switches for bilge pump, navigation/anchor lights, panel lights, horn and accessories	Dual cable steering
Electric horn	Stainless steel bow eye & stern eyes
Navigation lights	6" cleats
AM/FM stereo cassette w/2 speakers	Smoked full glass walk-thru windshield
Glove box	Hinged bow seats w/storage
Ski storage	Passenger grab handles
Tilt steering	Adjustable buckets/bench seating
	Molded swim platform
	Stainless steel boarding ladder
	Courtesy lights
	Bilge pump

Options

Convenience Package: hour meter, depth sounder	Power antenna (Clarion stereos only)
Color-coordinated bow cover	Mooring cover
Color-coordinated cockpit cover	Ski tow pylon
Color-coordinated bimini top & boot	Telescopic stern light
Clarion stereo cassette w/4 speakers	Automatic bilge pump
Clarion stereo CD w/4 speakers	Telescopic 3-step ladder
	Snap-in carpet

Color Options

White w/Blue/Yellow/Black Graphics	White w/Red/Yellow/Black Graphics
White w/Plum/Yellow/Black Graphics	White w/Teal/Yellow/Black Graphics

Engine Options

OMC Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom, OMC systems check	Mercury/Mariner 115 ELPTO*
Mercury or Yamaha Pre-Rig includes: ignition switch with ignition interrupt switch, speedometer, tachometer, trim gauge, fuel gauge, voltmeter, manufacturer controls, pre-drilled transom	Mercury/Mariner 135 L*
	Mercury/Mariner 135 L Optimax*
	Mercury/Mariner 150 L*
	Mercury/Mariner 150 L EFI*
	Mercury/Mariner 150 L Optimax*
	Mercury/Mariner 175 L*
	Mercury/Mariner 175 L EFI*
	Yamaha C 115 TLRY*
	Yamaha 115 TLRY*
	Yamaha 130 TLRY*
	Yamaha 150 EFI TLRY*
	Yamaha 175 TLRY*

* Engine will be shipped from Mercury Marine or Yamaha Marine; boat will be pre-rigged with Mercury/Mariner or Yamaha parts.

Performance

Engine: Mercury 150 XR-6, Prop: 14¼ x 21 Mirage Plus				
RPM	MPH	GPH	RANGE*	
2000	10	—	—	
3000	25	—	—	
4000	35	—	—	
WOT	52-55	—	—	
0-20 MPH Acceleration: 3.7 sec.				

Engine: Evinrude 150 FICHT, Prop: 14¼ x 21				
RPM	MPH	GPH	RANGE*	
2000	10	—	—	
3000	25	—	—	
4000	40	—	—	
WOT	53-56	—	—	
0-20 MPH Acceleration: 3.5 sec.				

Engine: Johnson 175 FastStrike, Prop: 14¼ x 21 Viper				
RPM	MPH	GPH	RANGE*	
2000	10	—	—	
3000	30	—	—	
4000	40	—	—	
WOT	58-61	—	—	
0-20 MPH Acceleration: 3.2 sec.				

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat	\$	_____
Motor _____ H.P.		_____
Trailer		_____
Accessories		_____
T, T & L		_____
TOTAL PRICE \$		_____

Specifications

LOA 21' 3" (6.49 m.)
 Beam 100" (2.54 m.)
 Depth 54" (1.37 m.)
 Maximum Depth 60" (1.53 m.)
 Cockpit Depth 35" (.89 m.)
 Approx. Wt. w/5.0 Gi Volvo Penta
 3650 lbs. (1656 kg.)
 Draft: A. Drive Unit Up 18" (.46 m.)
 B. Drive Unit Down 33" (.84 m.)

Transom Width 94" (2.39 m.)
 Hull Deadrise 24°
 LOA on Trailer 25' 10" (7.87 m.)
 Fuel Capacity 60 gal. (227.3 L.)
 Maximum Load 1875 lbs. (844 kg.)
 Max. Persons 11 or 1875 lbs. (844 kg.)
 NMMMA Certified

Standard Features

Instrument panel includes:
 speedometer, tachometer, trim, fuel,
 oil pressure, voltmeter and engine
 temperature gauges; plus switches for
 bilge pump, blower, lights and horn;
 hour meter and depth sounder
 Horn
 Automatic bilge pump
 Blower
 Clarion stereo cassette w/4 speakers
 Stainless steel bow eye & stern eyes
 6" cleats
 Ski tow ring
 Glove box
 Smoked full glass curved walk-thru
 windshield

Bolster buckets w/flip-down seat/aft
 bench seating
 Wraparound hinged bow seats
 w/storage
 Telescopic stern light
 Molded swim platform
 Stainless steel telescopic 3-step
 boarding ladder
 Twin lever controls w/trim
 Merc/Volvo prop
 Tilt steering
 Stainless steel vents
 Power antenna
 Aft sundeck with electric hatch lifts
 Urethane Graphics package

Options

Thru-Transom Exhaust w/Corsa Quick &
 Quiet II
 Captain's Call (electric) w/Corsa Quick
 & Quiet II
 Color-coordinated bow cover
 Mooring cover
 Color-coordinated bimini top w/boot
 Color-coordinated cockpit cover

Fire extinguisher system
 Clarion stereo CD w/4 speakers
 Clarion stereo CD remote ready
 w/4 speakers
 Bow filler cushion with table
 Stainless steel pull-up cleats
 Color-coordinated snap-in carpet

Color Options

White w/Blue/Yellow/Black graphics
 White w/Plum/Yellow/Black graphics

White w/Red/Yellow/Black graphics
 White w/Teal/Yellow/Black graphics

Engine Options

5.0L EFI MerCruiser (240 hp) (Alpha)
 5.7L MerCruiser (250 hp) (Alpha)
 5.7L EFI MerCruiser (260 hp) (Alpha)
 350 Magnum MPI MerCruiser
 (300 hp) (Bravo I)
 7.4L MPI MerCruiser (310 hp) (Bravo I)
 454 Magnum MPI MerCruiser
 (385 hp) (Bravo I)

5.0 Gi Volvo Penta (250 hp)
 5.7 GS Volvo Penta (250 hp)
 5.7 GSi Volvo Penta (280 hp)
 7.4 Gi Volvo Penta (310 hp)

Performance

Engine: MerCruiser 350 Magnum MPI, Prop: 14% x 21 Mirage Plus

RPM	MPH	GPH	RANGE*
2000	10	—	—
3000	35	—	—
4000	45	—	—
WOT	58-60	—	—

0-20 MPH Acceleration: 4.0 sec.

Engine: 7.4L MerCruiser MPI, Prop: 14% x 23 Mirage Plus

RPM	MPH	GPH	RANGE*
2000	10	—	—
3000	35	—	—
4000	50	—	—
WOT	59-61	—	—

0-20 MPH Acceleration: 3.7 sec.

Engine: MerCruiser 454 Magnum MPI, Prop: 14% x 23 Mirage Plus

RPM	MPH	GPH	RANGE*
2000	10	—	—
3000	40	—	—
4000	50	—	—
WOT	65-68	—	—

0-20 MPH Acceleration: 3.5 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.
 *Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 23' 3" (7.09 m.)
 Beam 102" (2.59 m.)
 Depth 55½" (1.41 m.)
 Maximum Depth 60" (1.53 m.)
 Cockpit Depth 35" (.89 m.)
 Approx. Wt. w/5.7L MerCruiser
 4300 lbs. (1950 kg.)

Transom Width 96" (2.44 m.)
 Hull Deadrise 24°
 LOA on Trailer 26' 10" (8.18 m.)
 Fuel Capacity 60 gal. (227.3 L.)
 Maximum Load 2150 lbs. (967.5 kg.)
 Max. Persons 12 or 2150 lbs. (967.5 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 18½" (.47 m.)
 B. Drive Unit Down 33½" (.85 m.)

Standard Features

Instrument panel includes:
 speedometer, tachometer, trim, fuel,
 oil pressure, voltmeter and engine
 temperature gauges; plus switches for
 bilge pump, blower, lights and horn;
 hour meter and depth sounder

Horn
 Automatic bilge pump
 Blower
 Clarion stereo cassette w/4 speakers
 Stainless steel bow eye & stern eyes
 6" cleats
 Ski tow ring
 V-berth lounge seat
 Bow anchor locker
 Urethane Graphics package

Smoked full glass windshield
 Bolster buckets w/flip-down seat/aft
 bench seating
 Porta-pottie
 Molded swim platform
 Stainless steel telescopic 3-step
 boarding ladder
 Twin lever controls w/trim
 Merc/Volvo prop
 Tilt steering
 Plexiglass deck hatch
 Stainless steel vents
 Telescopic stern light
 Aft sundeck with electric hatch lifts
 Glove box

Options

Thru-Transom Exhaust w/Corsa Quick &
 Quiet II
 Captain's Call (electric) w/Corsa Quick
 & Quiet II
 Stainless steel pull-up cleats
 Mooring cover
 Color-coordinated bimini top w/boot

Color-coordinated cockpit cover
 Fire extinguisher system
 Color-coordinated snap-in carpet
 Clarion stereo CD w/4 speakers
 Clarion stereo CD remote ready
 w/4 speakers

Color Options

White w/Blue/Yellow/Black graphics
 White w/Plum/Yellow/Black graphics

White w/Red/Yellow/Black graphics
 White w/Teal/Yellow/Black graphics

Engine Options

5.7L MerCruiser (250 hp) (Alpha)
 5.7L EFI MerCruiser (280 hp) (Alpha)
 350 Magnum MPI MerCruiser
 (300 hp) (Bravo I)
 7.4L MPI MerCruiser (310 hp) (Bravo I)
 454 Magnum MPI MerCruiser
 (385 hp) (Bravo I)

502 Magnum MPI MerCruiser
 (415 hp) (Bravo I)
 5.7 GS Volvo Penta (250 hp)
 5.7 GSi Volvo Penta (280 hp)
 7.4 Gi Volvo Penta (310 hp)

Performance

Engine: 7.4L MerCruiser MPI, Prop: 14% x 23 Mirage Plus

RPM	MPH	GPH	RANGE*
2000	10	—	—
3000	35	—	—
4000	50	—	—
WOT	58-62	—	—

0-20 MPH Acceleration: 4.0 sec.

Engine: 454 Magnum MPI MerCruiser, Prop: 14% x 23

RPM	MPH	GPH	RANGE*
2000	10	—	—
3000	35	—	—
4000	50	—	—
WOT	65-68	—	—

0-20 MPH Acceleration: 3.8 sec.

Engine: MerCruiser 502 Magnum MPI, Prop: 14% x 23 Mirage Plus

RPM	MPH	GPH	RANGE*
2000	10	—	—
3000	35	—	—
4000	50	—	—
WOT	68-72	—	—

0-20 MPH Acceleration: 3.7 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

MerCruiser Sterndrive Engine Information

The following pages contain data about sterndrives offered in our 2000 product.

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

3.0L MERCUISER

135 hp/101 kw.
4
181
9.3:1
4400-4800
2.0:1
Power
Power
34"
23"
20" (above crankshaft at CL)
635 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

4.3L MERCUISER

190 hp/141 kw.
6
262
9.4:1
4400-4800
1.84:1
Power
Power
33"
32"
21" (above crankshaft at CL)
840 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

4.3L BRAVO III MERCUISER

190 hp/141 kw.
6
262
9.4:1
4400-4800
2.43:1
Power
Power
33"
32"
21" (above crankshaft at CL)
894 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.0L MERCUISER

220 hp/163 kw.
8
305
9.4:1
4400-4800
1.81
Power
Power
37"
29"
22" (above crankshaft at CL)
938 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.0L EFI MERCUISER

240 hp/178 kw.
8
305
9.4:1
4400-4800
1.62
Power
Power
37"
29"
22" (above crankshaft CL)
938 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.7L MERCUISER

250 hp/185 kw.
8
350
9.4:1
4400-4800
1.47:1
Power
Power
37"
29"
22" (above crankshaft at CL)
938 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.7L BRAVO III MERCUISER

250 hp/185 kw.
8
350
9.4:1
4400-4800
2.2:1
Power
Power
37"
29"
22" (above crankshaft at CL)
994 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.7L EFI MERCUISER

260 hp/192 kw.
8
350
9.4:1
4400-4800
1.47:1
Power
Power
37"
29"
22" (above crankshaft at CL)
938 lbs. (pkg. weight)

Volvo Penta Sterndrive Engine Information

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

7.4L MPI BRAVO I MERCURISER

310 hp/229 kw.
8
454
8.9:1
4200-4600
1.50:1
Power
Power
39"
32"
22" (above crankshaft at CL)
1,158 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

7.4L MPI BRAVO III MERCURISER

310 hp/229 kw.
8
454
8.9:1
4200-4600
2.0:1
Power
Power
39"
32"
22" (above crankshaft at CL)
1,179 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

350 MAGNUM MPI MERCURISER

300 hp/ 222 kw.
8
350
9.4:1
4600-5000
1.47:1
Power
Power
37"
29"
22" (above crankshaft at CL)
952 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

454 MAGNUM MPI MERCURISER

385 hp/285 kw.
8
454
8.6:1
4600-5000
1.50:1
Power
Power
39"
32"
22" (above crankshaft at CL)
1,177 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

502 MAGNUM MPI MERCURISER

415 hp/307 kw.
8
502
8.75:1
4600-5000
1.5:1
Power
Power
39"
32"
22" (above crankshaft at CL)
1,189 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

3.0 GS VOLVO PENTA

135 hp/100 kw.
4
181
9.2:1
4600
1.97:1
Power
Power
34"
24½"
19½" (above crankshaft at CL)
665 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

4.3 GL VOLVO PENTA

190 hp/141 kw.
6
262
9.4:1
4600
1.89:1
Power
Power
31½"
31"
20¾" (above crankshaft at CL)
880 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

4.3 GL DP VOLVO PENTA

190 hp/141 kw.
6
262
9.4:1
4600
2.32:1
Power
Power
31½"
31"
20¾" (above crankshaft at CL)
891 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.0 GL VOLVO PENTA

220 hp/163 kw.
8
305
9.4:1
4800
1.60:1
Power
Power
36 $\frac{1}{4}$ "
28 $\frac{1}{4}$ "
21" (above crankshaft at CL)
979 lbs. (pkg. weight)

5.0 GI VOLVO PENTA

250 hp/185 kw.
8
305
9.4:1
4800
1.60:1
Power
Power
36 $\frac{1}{4}$ "
28 $\frac{1}{4}$ "
21" (above crankshaft at CL)
979 lbs. (pkg. weight)

5.7 GS VOLVO PENTA

250 hp/185 kw.
8
350
9.4:1
4800
1.51:1
Power
Power
36 $\frac{1}{4}$ "
28 $\frac{1}{4}$ "
21" (above crankshaft at CL)
979 lbs. (pkg. weight)

5.7 GS DP VOLVO PENTA

250 hp/186 kw.
8
350
9.4:1
4800
1.95:1
Power
Power
36 $\frac{1}{4}$ "
28 $\frac{1}{4}$ "
21" (above crankshaft at CL)
990 lbs. (pkg. weight)

5.7 GSi VOLVO PENTA

280 hp/207 kw.
8
350
9.4:1
5000
1.43:1
Power
Power
36 $\frac{1}{4}$ "
28 $\frac{1}{4}$ "
22" (above crankshaft at CL)
991 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.7 GSi DP VOLVO PENTA

280 hp/207 kw.
8
350
9.4:1
5000
1.95:1
Power
Power
36 $\frac{1}{4}$ "
28 $\frac{1}{4}$ "
22" (above crankshaft at CL)
1002 lbs. (pkg. weight)

7.4 GI VOLVO PENTA

310 hp/229 kw.
8
454
9.1:1
4600
1.43:1
Power
Power
38 $\frac{1}{2}$ "
31 $\frac{1}{2}$ "
22 $\frac{1}{2}$ " (above crankshaft at CL)
1,193 lbs. (pkg. weight)

7.4 GI DP VOLVO PENTA

310 hp/229 kw.
8
454
9.1:1
4600
1.95:1
Power
Power
38 $\frac{1}{2}$ "
31 $\frac{1}{2}$ "
22 $\frac{1}{2}$ " (above crankshaft at CL)
1,204 lbs. (pkg. weight)

GLASTRON®

A stylized graphic element consisting of a thick, grey, curved arrow pointing to the right, positioned below the company name.

P. O. Box 460 • Little Falls, MN 56345
Phone 320/632-8395 • Fax 320/632-1438
www.glastron.com