

GLASTRON® 2005

**Product
Specifications
Manual**

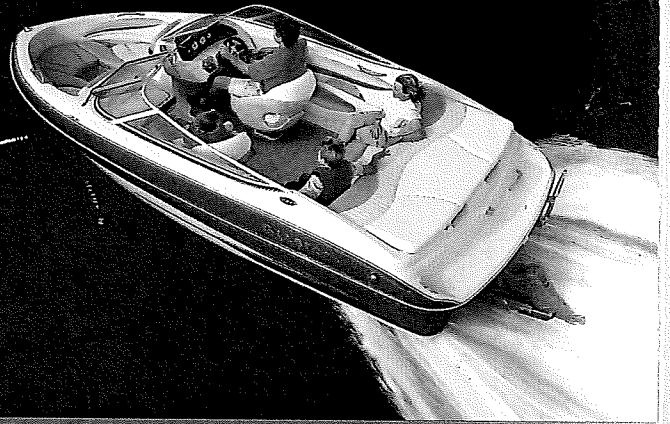


Table of Contents

Model Designator Key	2
2005 Model Directory	3
Glastron's Track Record	4
Glastron Performance.....	5
SSV® Hull Design	6
Unitized Deck/Floor	7
VEC® Technology	8-9
Sirius® Satellite Radio	10
Glastron's Unmatched Warranty	11
Glastron Warranty	12-13
VEC® Warranty	14-15
Features & Benefits	16-17
Canvas Choices.....	18
Seating Choices	19
EZ Loader® Trailers	20-21
Financing Guide	22
Definitions of Measurements	23
Model Specifications	24-71
Sterndrive Engine Specifications	72-77



Model Designator Key

0 = Outboard
 5 = Open Bow Sterndrive
 9 = Cuddy Cabin Sterndrive


Example: the SX 170 is an outboard model.

Model Directory


SX Runabouts	
SX 170	24
SX 175	26
SX 195	28
MX Runabouts	
MX 175.....	30
MX 185.....	32
MX Ski & Fish	
MX 180 Ski & Fish	34
MX 185 Ski & Fish	36
GX Runabouts	
GX 180	38
GX 185	40
GX 205	42
GX 205 WE.....	44
GX 235	46
GX 255	48
GX Ski & Fish	
GX 180 Ski & Fish	50
GX 185 Ski & Fish	52
GX 205 Ski & Fish	54
Deck Boats	
DX 205	56
DS 215.....	58
DX 235	60
GS Sport Cruisers	
GS 209.....	62
GS 219.....	64
GS 249.....	66
GS 269.....	68
GS 279.....	70

Glastron's Track Record

- **Founded in 1956**, Glastron was one of the very first large-scale manufacturers of fiberglass boats.
- Over the years, Glastron has been best known for their family runabouts. In fact, Glastron has manufactured **more fiberglass runabouts than any other manufacturer**—over 370,000 at last count.
- Glastron's product line today encompasses many types of trailerable family boats: **bowriders, ski & fish models, deck boats, cuddy cabins and twin-cabin cruisers.**
- Over the past decade, Glastron has experienced particularly impressive growth, earning them the distinction of being **the industry's fastest growing fiberglass boat company.**

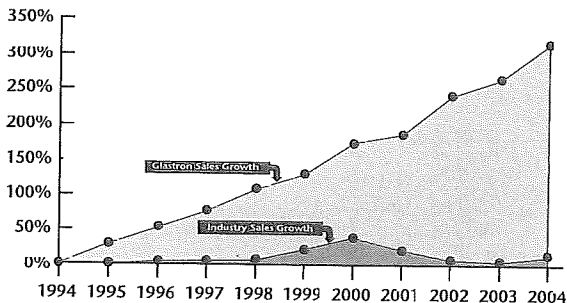

Glastron Performance

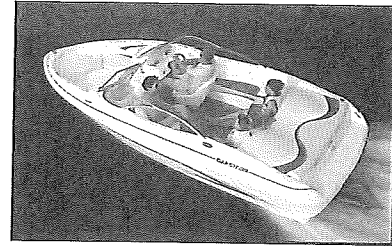


- Glastron's **penchant for performance** is known throughout the industry.
- Glastron has collected **dozens of design and performance awards** over the years. Among them: twelve Product Excellence Awards from *Powerboat* magazine.
- Every Glastron model delivers performance attributes that every family boater can appreciate (and every Glastron owner knows):
 - **Very quick planing times** (and minimal bowrise)
 - **Impressive top speeds**
 - **Low minimum planing speeds** (particularly important for tubing, kneeboarding and wakeboarding)
 - **Agile handling**
 - **Excellent fuel economy**

SSV® Hull Design



- A boat's hull design is the most important thing that determines how that boat will perform. That's why Glastron has made hull design a top priority right from day one.
- The legendary **SSV® hull** (Super Stable Vee) is the biggest reason Glastron's runabouts plane, run and corner so well.
- In boating circles, people recognize the SSV hull as **one of the best-performing hulls ever designed**. If there's any doubt, just ask any Glastron owner how well their boat performs.
- **Glastron's SSV hull is patented**; only Glastron has it. So no matter what other manufacturers may tell you, they don't have an SSV hull.

Unitized Deck/Floor

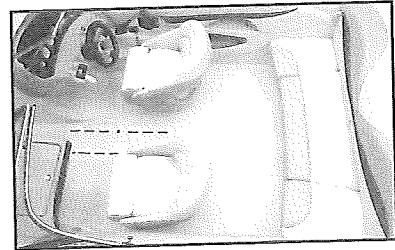


- In 2005, most Glastron models are constructed with a **unitized deck/floor**.*
- The entire topside of the boat is **fabricated as single fiberglass component** (versus 2, 3 or more components in conventional construction).
- The top, sides and floor have **no seams or joints**, which provides a clean and seamless look.
- Unitized construction means unparalleled structural rigidity; in other words, a **stronger boat**.
- Another benefit: boats with a unitized deck/floor have a **quieter, smoother, more responsive ride**. So not only can you see the difference, but you can actually feel the difference.

**All except SX models and GS 209.*

VEC® Technology


- VEC® (Virtual Engineered Composites) is a patented process developed by Genmar and introduced by Glastron.

- Other manufacturers build fiberglass boats using an open-mold process, a process that is labor-intensive, messy and imprecise. VEC, on the other hand, is a **closed-mold** process.

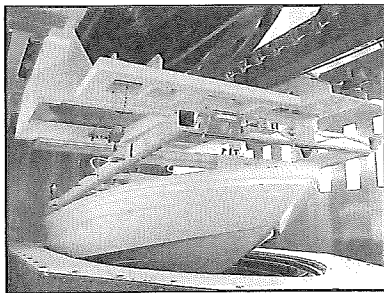

- The VEC system is a highly automated, computer-controlled manufacturing process—one that results in a **near-perfect fiberglass boat hull every time**.
- VEC construction eliminates the need for wood stringers. A fiberglass stringer system is bonded to the hull.

- Every VEC boat has a skid-resistant **fiberglass floor**.
- VEC is also a cleaner and more **environmentally friendly** way to build boats. The fiberglass lamination portion of the VEC manufacturing process reduces styrene emissions by 90% compared to conventional hand-laid lamination.
- There's also a noticeable difference in the appearance of a VEC boat. It has a **super-high-quality finish, both inside and out**. The VEC hull is smooth and free of unsightly raw fiberglass and loose fiberglass strands.
- Glastron backs every VEC boat with the ultimate warranty: a **lifetime limited warranty** on all structural components.

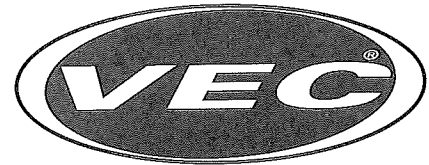

Sirius® Satellite Radio

A Clarion® stereo system with Sirius® satellite radio is offered as standard equipment on many Glastron models.*

- Models included: **GX** bowriders, and ski & fish models, **DX** and **DS** deck boats, and **GS** sport cruisers.
- These models come with Clarion AM/FM/CD player, a Sirius receiver and a satellite antenna—all factory installed.
- Sirius offers over **100 streams of programming**, 24 hours a day, including commercial-free music, CNBC, ESPN, E! and Radio Disney.
- The first **12 months of Sirius service is paid by Glastron!**
- What's more, Sirius satellite service is **interruptible one time**. (Example: new owner activates service from April to October 2005, suspends service for 6 months, then reactivates for the 2006 boating season.)

■ Value to customer:

Clarion XMD3 stereo upgrade	\$ 170
Sirius satellite receiver	200
Shakespeare satellite antenna.....	140
Installation	100
Sirius 12-month subscription.....	155
TOTAL VALUE.....	\$ 765


*U.S. only

Glastron's Unmatched Warranty

Manufacturers of quality products tend to stand behind them, so the best way to judge the quality of a boat is to look at how well it's backed. When you compare Glastron warranties with those of other boat builders, you'll see that Glastron's are among the best in the marine industry.



- Every Glastron comes with a **5-year limited hull warranty**.
- Glastron also provides a **2-year limited warranty on other components.*** That's twice as long as most boat builders.
- All wood components come with a **lifetime limited warranty**.
- Glastron's VEC® boats are backed with the ultimate warranty: a **lifetime limited warranty on structural components** (a portion of which is transferable to the second owner).



*Propulsion warranties vary by manufacturer.

Glastron Limited Warranty

Glastron® Boats, a Division of Larson/Glastron Boats, Inc., a subsidiary of Genmar Holdings, Inc. warrants to the first retail purchaser of a new Glastron boat bought from a factory authorized dealer that the hull is free from defects in materials and workmanship for a period of five (5) years, and free from defects in materials and workmanship in other components for a period of two (2) years, measured from the date of retail sale. Glastron warrants that it will repair or replace, in its sole discretion, those parts of the boat manufactured by Glastron and which are found, within reasonable judgment of Glastron, to contain defects within the applicable warranty periods.

This Glastron boat, including any alleged defective part, must be returned to an authorized Glastron dealer within the warranty period to obtain warranty service. The Glastron dealer will carry out the warranty procedures on the Purchaser's behalf. All warranty work will be performed at an authorized dealer, at the Glastron factory or at another repair facility that Glastron selects. Purchaser is responsible for the expense associated with transporting the boat to and from the repair facility.

Glastron's obligation with respect to this warranty is limited to making repairs or replacement of parts, and no claim of breach of warranty shall be cause for cancellation or recession of the contract of sale of the Glastron boat. Any action for breach of warranty relating to a boat must be brought within a period of sixty (60) days following Glastron's failure to repair or replace alleged defects.

WHAT IS NOT COVERED:

This Warranty does not cover:

1. A boat, including its components, that has been altered or modified so as to adversely affect its operation, performance or durability.
2. Engines, outdrives, controls, propellers, batteries or other equipment or accessories which are not manufactured by Glastron, whether or not warranted by other manufacturers.
3. Gelcoat finishes (including blistering, and osmotic blistering, cracking, crazing or discoloration), mirrors, window glass, chrome and chrome painted fixtures, stainless steel or aluminum finishes.
4. Leakage around windshields, hatches or other designed openings.

5. Any boat which has been misused, used in a negligent manner, used for racing, used for rental or commercial purposes, used with an improper trailer or trailered improperly, used without proper maintenance, operated contrary to any instruction furnished by Glastron, or operated in violation of any Federal, State, Coast Guard or other governmental agency laws, rules or regulations.
6. A boat which has been overpowered, according to the maximum recommended engine horsepower specified on the capacity plate, or which has had the transom altered with bracket or jack plate.
7. Weight, speed, fuel economy or other estimated performance characteristics.
8. Loss of time, inconvenience, rental charges, travel expense, loss of use, boat payments, in-and-out-of-water charges, trailering or towing charges, storage charges, loss of or damage to personal property, or other remedies not specifically allowed.
9. Dealer preparation, adjustments, alignments and cleaning in preparing the boat for delivery.
10. Repairs made necessary by normal wear and use.

Remedy under this warranty is expressly limited to repair or replacement of defects in materials or workmanship, and does not include incidental or consequential damages which are specially **DISCLAIMED**. **NOTE: SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU.** The express limited warranty described on previous page is exclusive. All **IMPLIED WARRANTIES ARE LIMITED IN THEIR DURATION TO THE ONE (1) YEAR WARRANTY PERIOD. ALL IMPLIED WARRANTIES, INCLUDING MERCHANTABILITY and FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED IN THEIR ENTIRETY AFTER EXPIRATION OF THE ONE (1) YEAR WARRANTY PERIOD.** There are no warranties which extend beyond the description of the face hereof. **NOTE: SOME STATES DO NOT ALLOW LIMITATION ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.**

This document contains the entire warranty given by Glastron. Glastron does not authorize any person or persons, including its Glastron dealers, to change the terms of this express limited warranty, which is Glastron's **only** warranty. Glastron reserves the right to change or improve the design or manufacture of Glastron boats without obligation to modify any boat previously manufactured.

VEC® Lifetime Limited Warranty

Glastron® Boats warrants to you, the first retail purchaser of this boat manufactured with VEC® technology, that it will repair or replace defects in materials or workmanship that occur within the applicable Warranty Periods, subject to the "What This Warranty Does Not Cover" section on the following page. The applicable Warranty Periods run from the date the boat is purchased.

WARRANTY PERIODS:

Defects in structural parts, including the hull, deck, floor, stringers and transom: As long as you own the boat.

Defects in factory installed parts and components: Two (2) year Warranty Period.

Defects in gelcoat cosmetics, including cracking, crazing, discoloration and fading: One (1) year Warranty Period.

Defects causing gelcoat blistering: Five (5) year Warranty Period, except that Glastron shall have no liability or responsibility to correct or repair any damage if the original gel surface has been altered in any way, including repair, application of any coating other than marine anti-fouling bottom paint, improper surface preparation for paint, or excessive sanding or sandblasting.

This warranty extends only to the first retail purchaser. Coverage remaining under the Warranty Periods (other than for structural parts) may be transferred once to a second owner upon written request made to Glastron within 15 days of purchase of the used boat. Requests for warranty transfer must be accompanied by a \$250 transfer fee and proof of purchase date. Glastron will repair structural defects in boats owned by registered warranty transfer owners for up to ten (10) years from the date of original delivery.

Your sole and exclusive remedy is the repair or replacement, at its sole option, of parts and components covered by this warranty.

This Glastron boat, including any alleged defective part, must be returned to an authorized Glastron dealer within the applicable warranty period to obtain warranty service. The Glastron dealer will carry out the warranty procedures on the owner's behalf. All warranty work will be performed at an authorized dealer, at the Glastron factory, or at another repair facility that Glastron selects. The owner is responsible for the expense associated with transporting the boat to and from the repair facility.

An action for breach of warranty shall be barred unless it is commenced within four (4) years from the date the cause of action accrues. An action for breach of any duty or obligation to repair or replace shall be barred unless it is commenced within one year from the date the cause of action accrues regardless of the time remaining in the Warranty Period.

WHAT THIS WARRANTY DOES NOT COVER:

1. A boat purchased from any party other than an authorized Glastron dealer.
2. A boat, including its components, that has been altered or modified so as to adversely affect its operation, performance or durability.
3. Gel coat surfaces including, but not limited to, cracking, crazing, discoloration, or blistering except as noted on previous page.
4. Engines, outdrives, controls, propellers, batteries and other equipment or accessories that are not manufactured by Glastron, whether or not warranted by other manufacturers.
5. Windshield breakage and leakage around windshields, hatches or other designed openings.
6. Any boat that has been misused, used in a negligent manner, used for racing, used for rental or other commercial purposes, used without normal maintenance, operated contrary to any instruction furnished by Glastron, involved in an accident, or operated in violation of any Federal, State, Coast Guard or other governmental agency laws, rules or regulations.
7. Weight, speed, fuel consumption, or other estimated performance characteristic.
8. Loss of time, inconvenience, boat payments, retail charges, travel expense, loss of use, haul out, launch, towing and storage charges, loss of or damage to personal property, or other remedies not specifically allowed.
9. A boat that has been overpowered according to the maximum recommended engine horsepower specified on the capacity plate.
10. Canvas, zippers, vinyl, upholstery, plastics, fabric, or trim.
11. Dealer preparation, cleaning, final adjustments and alignments in preparing the boat for delivery.
12. Repairs made necessary due to inadequate trailering or trailer support, or trailers that are improperly assembled designed or adjusted.

Remedy under this warranty is expressly limited to repair or replacement of defects in materials or workmanship, and does not include incidental or consequential damages that are specifically DISCLAIMED. Note: SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. The express limited warranty described above is exclusive. All IMPLIED WARRANTIES are LIMITED IN THEIR DURATION TO TWO (2) YEAR FROM THE DATE OF PURCHASE. IMPLIED WARRANTIES (IF ANY) INCLUDING MERCHANTABILITY and FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED IN THEIR ENTIRETY AFTER TWO (2) YEAR FROM THE DATE OF PURCHASE. There are no warranties which extend beyond the description on the face hereof. NOTE: SOME STATES DO NOT ALLOW LIMITATION ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS WHICH VARY FROM STATE TO STATE.

This document contains the entire warranty given by Glastron. Glastron does not authorize any person or persons, including Glastron dealers, to change the terms of this express limited warranty, which is Glastron's only warranty. Glastron reserves the right to change or improve the design or manufacture of Glastron boats without obligation to modify any boat previously manufactured.

Before your customers make a choice, make sure they know these facts.


FEATURES:

BENEFITS:


- | | |
|---|---|
| 1. Patented SSV® hull design | Quick planing; superior handling; enhanced fuel economy |
| 2. Unitized deck construction on most models | Seamless appearance; greater structural integrity = smooth, quiet, responsive ride |
| 3. VEC® construction on many models | State-of-the-art technology with lifetime limited warranty on structural components |
| 4. Fiberglass floors stronger; easy cleanup | Better appearance; |
| 5. Where used, wood is marine grade, preservative-treated | Lifetime warranty; no worry about wood rot |
| 6. Key structural areas are reinforced with multi-axial knitted fiberglass | Double strength in this all-important area |
| 7. All deck fittings are backed by under-deck supports fibreglassed into deck | Strength; durability |
| 8. Aircraft locknuts on bolts | Strength; long-term durability |
| 9. One-piece, lock looped marine-grade carpet | Better appearance; no seams |

- | | |
|--|--|
| 10. Marine-grade vinyl; marine-grade stitching | UV protected |
| 11. Ski locker in many models | Convenient storage for watersports toys |
| 12. Ski locker drain in subfloor | Lets water drain into bilge, keeping locker dry |
| 13. Tilt steering wheel standard on most models | More comfortable steering position |
| 14. Individual Faria® analog gauges | Easy-to-read; lifetime warranty |
| 15. Gas fill is located on side of boat (never over swim platform) | Eliminates risk of fuel spilling onto swim platform |
| 16. Low, built-in swim platform with stainless steel boarding ladder | Ease of boarding |
| 17. Boarding ladder on runabouts is located on starboard side of swim platform | Allows driver to see skier at all times when circling for pickup |
| 18. Each model is carefully designed for the proper weight-to-horsepower ratio | Better planing time; better fuel economy; better top speed |
| 19. Choice of MerCruiser® or Volvo Penta® sterndrive power | Customer can select preferred brand |
| 20. Choice of Mercury®, Yamaha®, Evinrude® or Johnson® on all outboard models | Customer can select preferred brand |


Canvas Choices




Soft Top




Bimini Top




Canvas Package




Camper Canvas Package



Bow Cover



Cockpit Cover



Mooring Cover

SX models feature white vinyl.

MX 18-foot models feature beige Sunbrella® canvas.


GX models feature color-matched Sunbrella canvas.

DX models feature beige Sunbrella canvas.


DS 215 features color-matched Sunbrella canvas.

GS models feature blue Sunbrella canvas.


Seating Choices

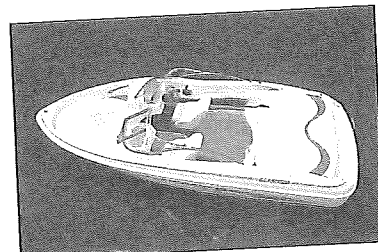

Sport Seating (SL)

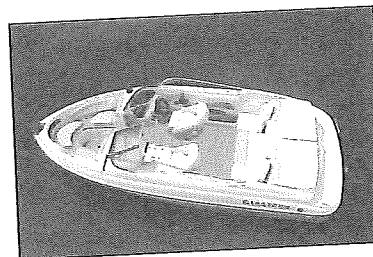

Ski & Fish Seating (SF)

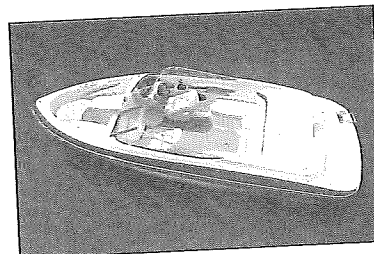

U-Shaped Seating (U)

EZ Loader Custom Boat Trailers

Glastron Boat Model	Trailer Model	Axle(s)
SX 170	GL 175ST	Single
SX 175 3.0L	GL 175ST	Single
SX 175 4.3L	EXL 2700	Single
SX 195	TRST 2900	Single
MX 175	GL 175E	Single
MX 180 SF	TRST 2900	Single
MX 185	TRST 3000	Single
MX 185 SF	TRST 305A	Single w/Brakes
GX 180	EXL 2700	Single
GX 180 SF	EXL 2700	Single
GX 185	EXL 3000*	Single w/Brakes
GX 185 SF	EXL 3000*	Single w/Brakes
GX 205	EXL 3500*	Single w/Brakes
GX 205 WE	EXL 4000*	Tandem w/Brakes One Axle
GX 205 SF	EXL 4000*	Tandem w/Brakes One Axle
GX 235	EXL 5200*	Tandem w/Brakes One Axle
GX 255	EXL 5800*	Tandem w/Brakes One Axle
DX 205	EXL 4000*	Tandem w/Brakes One Axle
DS 215	EXL 5200*	Tandem w/Brakes One Axle
DX 235	EXL 5800*	Tandem w/Brakes One Axle
GS 209	EXL 4000	Tandem w/Brakes One Axle
GS 219	EXL 4400*	Tandem w/Brakes One Axle
GS 249 (Non-Package)	EXL 7500*	Tandem w/Brakes One Axle
GS 269 (Non-Package)	EXL 7500*	Tandem w/Brakes One Axle
GS 279 (Non-Package)	EXL 7500*	Tandem w/Brakes One Axle

2005 Standard EXL Features: Tube Construction, Steel Fenders, Double Bunks, Aluminum Steps, Chrome Rims, Underslung Space Carrier, Swing Tongue Standard on all Trailers thru the EXL 4000

2005 Standard TRST Features: Tube Construction, Steel Fenders, Single Bunks, Alumalook Wheels, Blackwall Bias Tires, Painted Steel Steps

* Brakes on One Axle Standard EXL 3000 up to EXL 7500

EZ Loader Standard Galvanized Bunk Trailers

Glastron Boat Model	Trailer Model
SX 170	EZL96B 15-18 2800NB
SX 175 3.0L	EZL96B 15-18 2800NB
SX 175	EZL96B 15-18 2800NB
SX 195	EZL96B 17-20 3100H1X
MX 175 (Non-Package)	EZL96B 15-18 2800NB
MX 180 SF	EZL96B 17-20 2800NB
MX 185	EZL96B 17-20 3100H1X
MX 185 SF	EZL96B 17-20 3100H1X
GX 180	EZL96B 17-20 2800NB
GX 180 SF	EZL96B 17-20 2800NB
GX 185	EZL96B 17-20 3100H1X
GX 185 SF	EZL96B 17-20 3100H1X
GX 205	TEZL96B 17-20/22 4000H1X
GX 205 WE	TEZL96B 17-20/22 4000H1X
GX 205 SF	TEZL96B 17-20/22 4000H1X
GX 235	TEZL96B 19-22 4700H1X
GX 255	TEZB 23-25/27 5800H1X
DX 205	TEZL96B 17-20/22 4000H1X
DS 215	TEZL96B 17-20/22 4000H1X
DX 235	TEZB 19-22/24 5200H1X
GS 209	TEZL96B 17-20/22 4000H1X
GS 219	TEZL96B 19-22 4700H1X
GS 249 (Non-Package)	TEZB 23-25/27 5800H1X
GS 269 (Non-Package)	TEZB 23-25/27 7500H1X
GS 279 (Non-Package)	TEZB 23-25/27 7500H1X

EZ Loader Standard Aluminum Bunk Trailers

Glastron Boat Model	Trailer Model
SX 170	ALB 16-18 2800NB
SX 175 3.0L	ALB 16-18 2800NB
SX 175	ALB 16-18 2800NB
SX 195	ALB 18-20 3100H1X
MX 175 (Non-Package)	ALB 16-18 2800NB
MX 180 SF	ALB 18-20 2800NB
MX 185	ALB 18-20 3100H1X
MX 185 SF	ALB 18-20 3100H1X
GX 180	ALB 18-20 2800NB
GX 180 SF	ALB 18-20 2800NB
GX 185	ALB 18-20 3100H1X
GX 185 SF	ALB 18-20 3100H1X
GX 205	TALB 18-21 4000H1X
GX 205 WE	TALB 18-21 4000H1X
GX 205 SF	TALB 18-21 4000H1X
GX 235	TALB 20-23 4600H1X
GX 255	TALB 21-25 6200H1X
DX 205	TALB 18-21 4000H1X
DS 215	TALB 20-23 4600H1X
DX 235	TALB 21-25 6200H1X
GS 209	TALB 18-21 4000H1X
GS 219	TALB 20-23 4600H1X
GS 249 (Non-Package)	TALB 23-27 6200H1X
GS 269 (Non-Package)	TALB 23-27 7900 H1X
GS 279 (Non-Package)	TALB 23-27 7900 H1X

Monthly Payments

Length of Loan	Interest Rate	Payment Per \$1000
3 years	6.00%	30.42
	6.50%	30.65
	7.00%	30.88
	7.50%	31.11
	8.00%	31.34
	8.50%	31.57
5 years	9.00%	31.80
	6.00%	19.33
	6.50%	19.57
	7.00%	19.80
	7.50%	20.04
	8.00%	20.28
7 years	8.50%	20.52
	9.00%	20.76
	6.00%	14.61
	6.50%	14.85
	7.00%	15.09
	7.50%	15.34
8 years	8.00%	15.59
	8.50%	15.84
	9.00%	16.09
	6.00%	13.14
	6.50%	13.39
	7.00%	13.63
10 years	7.50%	13.88
	8.00%	14.14
	8.50%	14.39
	9.00%	14.65
	6.00%	11.10
	6.50%	11.35
12 years	7.00%	11.61
	7.50%	11.87
	8.00%	12.13
	8.50%	12.40
	9.00%	12.67
	15 years	6.00%
6.50%		10.02
7.00%		10.28
7.50%		10.55
8.00%		10.82
8.50%		11.10
	9.00%	11.38
	6.00%	8.44
	6.50%	8.71
	7.00%	8.99
	7.50%	9.27
	8.00%	9.56
	8.50%	9.85
	9.00%	10.14

Definitions of Measurements

Length Overall (LOA) — Distance along the centerline from the tip of the bow to the aft-most part of the hull.

Maximum Beam — Maximum width of the boat.

Transom Width — Maximum width of the boat at the transom.

Depth — Vertical distance from the lowest point of the keel to the highest point of the boat, excluding windshields, lights and other removable components.

Transom Deadrise — Angle of the hull at the transom, as measured in degrees, relative to the water.

Maximum Depth — Vertical distance from the lowest point of the keel to the highest point of the boat, including windshields.

Cockpit Depth — Vertical distance from the boat floor to the top of gunwale as measured at the driver's seat.

Length Overall on Trailer — Distance measured along the boat centerline, from forward-most point of trailer to aft-most point of motor/outdrive.

Boat Height on Trailer — Vertical distance from the ground to the highest point of boat, including the windshield.

Draft (drive unit up) — Total number of inches of boat and/or motor and drive unit below the waterline. Measured unloaded, with the motor/drive unit in the full up position.

Draft (drive unit down) — Total number of inches of boat and/or motor and drive unit below the waterline. Measured unloaded, with the motor/drive unit in the full down position.



Specifications

LOA 17' 1" (5.21 m.)
Beam 88" (2.24 m.)
Depth 43" (1.09 m.)
Maximum Depth 59" (1.50 m.)
Cockpit Depth 28½" (.72 m.)
Approx. Wt. 1440 lbs. (653 kg.)
 w/o engine
Transom Width 86" (2.18 m.)

Transom Deadrise 21°
LOA on Trailer 21' 6" (6.55 m.)
Fuel Capacity 23 gal. (87 L.)
Maximum Load 1890 lbs. (857 kg.)
Max. Persons 8 or 1175 lbs. (533 kg.)
Max. Horsepower 150 (112 kw.)
 NMMA Certified

Draft: A. Drive Unit Up 15½" (.39 m.)
 B. Drive Unit Down 28½" (.72 m.)

Standard Features

Instrument panel includes:
 speedometer, tachometer, & fuel
 gauges; plus switches for bilge
 pump, navigation/anchor lights,
 panel lights, horn & accessories
 Automatic bilge pump
 Electric horn
 Snap-in carpet
 Navigation lighting
 AM/FM stereo cassette w/2 speakers
 Ski/kneeboard locker

Glove box
 6" cleats
 Walk-thru curved windshield
 Fiberglass floor
 Bow seats w/storage
 Stainless steel bow eye & stern eyes
 Passenger grab handles
 SL seating: 2 bucket seats/aft bench
 seat/sunlounge
 Molded swim platform
 Stainless steel boarding ladder

Options

Soft top w/concealed storage & boot
 Canvas Package: bow cover, walk-thru
 curtain, side curtains & stern curtain
 Bimini top w/boot
 Cockpit cover
 Bow cover
 Mooring cover

Dual cable steering
 Tilt steering
 Ski tow pylon
 Convenience Package: hour meter
 & depth sounder
 AM/FM/CD stereo
 Flip-up bucket seat — (1) each

Color Choices

White w/Blue Graphics White w/Red Graphics White w/Yellow Graphics

Engine Choices

Johnson 90 PLSO
 Johnson 115 PLSO
 Johnson 115 PL4SO
 Johnson 150 PLSO

Evinrude 115 FPLSO
 Evinrude 135 FPLSO
 Evinrude 150 FPLSO

Yamaha 90 TLRD
 Yamaha 115 TLRD
 Yamaha F 115 TLRD
 Yamaha 150 TLRD

Mercury 90 ELPTO
 Mercury 115 ELPTO
 Mercury 125 ELPTO
 Mercury 135 L Optimax
 Mercury 150 L XR6

Performance

Engine: Johnson 115 FastStrike, Prop: 14 x 19

RPM	MPH	GPH	RANGE*
2500	15	2.9	107
3200	25	4.2	123
4200	35	6.3	115
WOT	43-45	—	—

0-20 MPH Acceleration: 3.5 sec.

Engine: Johnson 150 FastStrike, Prop: 14½ x 19

RPM	MPH	GPH	RANGE*
2400	15	3.7	84
3300	30	5.0	124
4500	40	7.5	110
WOT	49-52	—	—

0-20 MPH Acceleration: 3.2 sec.

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____



Specifications

LOA 17' 1" (5.21 m.)
Beam 88" (2.24 m.)
Depth 43" (1.09 m.)
Maximum Depth 59" (1.50 m.)
Cockpit Depth 28½" (.73 m.)
Approx. Wt. 2050 lbs. (930 kg.)
 w/3.0 GL Volvo Penta®

Transom Deadrise 21°
Transom Width 86" (2.18 m.)
LOA on Trailer 21' 6" (6.55 m.)
Fuel Capacity 23 gal. (87 L.)
Maximum Load 1150 lbs. (522 kg.)
Max. Persons 8 or 1150 lbs. (522 kg.)
 NIMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.)
B. Drive Unit Down 31" (.79 m.)

Standard Features

Instrument panel includes:
 speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter and
 engine temperature gauges; plus
 switches for bilge pump, blower,
 horn, lights and accessories

Electric horn
 Bilge pump & blower
 Navigation lighting
 AM/FM stereo cassette w/2 speakers
 Ski/kneeboard locker
 Ski tow ring
 Snap-in carpet

Stainless steel boarding ladder
 Stainless steel bow eye & stern eyes
 6" cleats
 Walk-thru curved windshield
 Bow seats w/storage
 Fiberglass floor
 Passenger grab handles
 SL seating: 2 bucket seats/aft bench
 seat/sunlounge
 Molded swim platform
 Merc/Volvo prop
 Glove box

Options

Soft top w/concealed storage & boot
 Canvas Package: bow cover, walk-thru
 curtain, side curtains & stern curtain
 Bimini top w/boot
 Cockpit cover
 Bow cover
 Mooring cover

Convenience Package: hour
 meter, depth sounder, automatic
 bilge pump
 High altitude prop
 Tilt steering
 AM/FM/CD stereo
 Telescopic 3-step boarding ladder
 Flip-up bucket seat — (1) each

Color Choices

White w/Blue Graphics White w/Red Graphics White w/Yellow Graphics

Engine Choices

3.0L MerCruiser (WPS) (135) 3.0 GL Volvo Penta (WPS) (135)
 4.3L MerCruiser (190) 4.3 GL Volvo Penta (190)

Performance

Engine: 3.0 GL Volvo Penta, Prop: 14½ x 19

RPM	MPH	GPH	RANGE*
2000	10	2.1	99
3000	20	3.2	129
4000	35	7.6	95
WOT	40-43	—	—

0-20 MPH Acceleration: 3.8 sec.

Engine: 4.3L MerCruiser, Prop: 14¼ x 23

RPM	MPH	GPH	RANGE*
2400	15	3.0	104
3200	35	5.0	145
4000	45	8.5	110
WOT	48-50	—	—

0-20 MPH Acceleration: 3.5 sec.

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____



Specifications

LOA 18' 7" (5.66 m.)
Beam 90 3/4" (2.31 m.)
Depth 47" (1.19 m.)
Maximum Depth 63" (1.60 m.)
Cockpit Depth 28 1/4" (.72 m.)
Approx. Wt. 2535 lbs. (1150 kg.)
 w/4.3L MerCruiser®

Transom Deadrise 21°
Transom Width 88" (2.24 m.)
LOA on Trailer 22' (6.71 m.)
Fuel Capacity 31 gal. (117 L.)
Maximum Load 1275 lbs. (578 kg.)
Max. Persons 9 or 1275 lbs. (578 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 16 1/2" (.42 m.)
B. Drive Unit Down 31 1/2" (.80 m.)

Standard Features

Instrument panel includes:
 speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter and
 engine temperature gauges; plus
 switches for bilge pump, blower,
 horn, lights and accessories

Snap-in carpet
 Stainless steel bow eye & stern eyes
 Walk-thru curved windshield
 Bow seats w/storage
 Passenger grab handles
 SL seating: 2 bucket seats/aft bench
 seat/sunlounge
 6" cleats
 Molded swim platform
 Stainless steel boarding ladder
 Merc/Volvo prop
 Glove box

Electric horn
 Bilge pump & blower
 Navigation lighting
 AM/FM stereo cassette w/2 speakers
 Ski/kneeboard locker
 Ski tow ring
 Fiberglass floor

Options

Soft top w/concealed storage & boot
 Canvas Package: bow cover, walk-thru
 curtain, side curtains & stern curtain
 Bimini top w/boot
 Cockpit cover
 Bow cover
 Mooring cover

Convenience Package: hour
 meter, depth sounder, automatic
 bilge pump
 Tilt steering
 AM/FM/CD stereo
 High altitude prop
 Telescopic 3-step boarding ladder
 Flip-up bucket seat — (1) each

Color Choices

White w/Blue Graphics White w/Red Graphics White w/Yellow Graphics

Engine Choices

3.0L MerCruiser (WPS) (135) 3.0 GL Volvo Penta (WPS) (135)
 4.3L MerCruiser (190) 4.3 GL Volvo Penta (190)
 4.3L MPI MerCruiser (220) 4.3 GXi Volvo Penta (225)
 5.0L MerCruiser (220) 5.0 GL Volvo Penta (220)
 5.0L MPI MerCruiser (260) 5.0 GXi Volvo Penta (270)

Performance

Engine: 3.0 GL Volvo Penta, Prop: 14 1/2 x 19

RPM	MPH	GPH	RANGE*
2000	10	2.1	99
3000	20	3.2	129
4000	35	7.6	95
WOT	39-42	—	—

0-20 MPH Acceleration: 3.9 sec.

Engine: 4.3L MerCruiser, Prop: 14 x 23

RPM	MPH	GPH	RANGE*
2000	15	2.8	169
3000	25	3.8	207
4000	35	6.9	160
WOT	47-49	—	—

0-20 MPH Acceleration: 3.5 sec.

Engine: 5.0 GL Volvo Penta, Prop: 14 1/2 x 21

RPM	MPH	GPH	RANGE*
2500	15	3.5	135
3500	40	8.5	148
4000	45	9.8	145
WOT	51-53	—	—

0-20 MPH Acceleration: 3.3 sec.

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____
 Motor _____ H.P. _____
 Trailer _____
 Accessories _____
 T, T & L _____
TOTAL PRICE \$ _____



Specifications

LOA 17' 1" (5.21 m.)
Beam 88" (2.24 m.)
Depth 44" (1.12 m.)
Maximum Depth 57" (1.45 m.)
Cockpit Depth 28½" (.72 m.)
Approx. Wt. 2025 lbs. (919 kg.)
 w/3.0 GL Volvo Penta®
Transom Width 86" (2.18 m.)
Transom Deadrise 21°
LOA on Trailer 20' 8" (6.30 m.)
Fuel Capacity 23 gal. (87 L.)
Maximum Load 1100 lbs. (499 kg.)
Max. Persons 7 or 1000 lbs. (454 kg.)
 NMMA Certified
Draft: A. Drive Unit Up 16" (.41 m.)
B. Drive Unit Down 31" (.79 m.)

Standard Features

Instrument panel includes:
 speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter &
 engine temperature gauges; plus
 switches for bilge pump, blower,
 horn, lights & accessories
 Electric horn
 Bilge pump & blower
 Navigation lighting
 Ski/kneeboard locker
 Ski tow ring
 Stainless steel boarding ladder
 Stainless steel bow eye & stern eyes
 6" cleats
 Walk-thru curved windshield
 Bow seats w/storage
 Unitized fiberglass deck/floor
 Passenger grab handles
 Molded swim platform
 Merc/Volvo prop
 SL seating: 2 bucket seats/aft bench
 seat/sunlounge

Options

Limited Edition Package: walk-thru
 glass windshield w/open side
 wings, deluxe bucket seats,
 lockable glove box, Clarion®
 AM/FM/CD stereo, side panel
 storage trays w/recessed speakers,
 rear passenger arm rests, snap-in
 carpet & LE exterior graphics
 package

Color Choices

White w/Blue Graphics

Engine Choices

3.0L MerCruiser (WPS) (135) 3.0 GL Volvo Penta (WPS) (135)

Performance

Engine: 3.0 GL Volvo Penta, Prop: 14¼ x 21

RPM	MPH	GPH	RANGE*
2000	9	3.3	58
3000	28	5.4	106
4000	37	8.5	91
WOT	42.43	—	—

0-20 MPH Acceleration: 3.8 sec.

Sale Price

Boat \$ _____
 Motor _____ H.P. _____
 Trailer _____
 Accessories _____
 T, T & L _____
TOTAL PRICE \$ _____



Specifications

LOA 18' (5.49 m.)
Beam 91" (2.31 m.)
Depth 43" (1.09 m.)
Maximum Depth 53" (1.35 m.)
Cockpit Depth 29½" (.75 m.)
Approx. Wt. 2610 lbs. (1184 kg.)
 w/4.3 GL Volvo Penta®

Transom Deadrise 21°
Transom Width 86" (2.18 m.)
LOA on Trailer 22' 4" (6.81 m.)
Fuel Capacity 29 gal. (110 L.)
Maximum Load 1200 lbs. (544 kg.)
Max. Persons 8 or 1200 lbs. (544 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.)
B. Drive Unit Down 31" (.79 m.)

Standard Features

Instrument panel includes:
 speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter &
 engine temperature gauges;
 switches for bilge pump plus horn,
 lights & accessories

Electric horn

Navigation lighting

AM/FM stereo cassette w/2speakers

Glove box

Ski tow ring

Hinged ski locker

Stainless steel bow eye & stern eyes

Bilge pump & blower

Passenger grab handles

Molded swim platform

6" cleats

Telescopic 3-step boarding ladder

Bow seats w/storage

Unitized fiberglass deck/floor

Snap-in carpet

Walk-thru curved glass windshield
 w/open side wings

Merc/Volvo prop

Courtesy lights

SL seating: SuspensionAire
 adjustable bucket seats w/flip-up
 bolsters/aft bench seat/sunlounge

Options

Sunbrella® soft top & boot
 w/concealed storage

Canvas Package

Bimini top w/boot

Cockpit cover

Bow cover

Mooring cover

Black hull & deck stripes

AM/FM/CD stereo

Full side glass windshield

Convenience Package: hour
 meter, depth sounder & automatic
 bilge pump

High altitude prop

Tilt steering

Color Choices

Beige w/Black Graphics

Engine Choices

3.0L MerCruiser (WPS) (135) 3.0 GL Volvo Penta (WPS) (135)
 4.3L MerCruiser (190) 4.3 GL Volvo Penta (190)
 4.3L MPI MerCruiser (220) 4.3 GXi Volvo Penta (225)

Performance

Engine: 3.0L MerCruiser, Prop: 14½ x 19

RPM	MPH	GPH	RANGE*
2100	15	2.5	108
2900	25	3.5	129
3500	35	7.4	185
WOT	42-44	—	—

0-20 MPH Acceleration: 3.4 sec.

Engine: 3.0 GL Volvo Penta, Prop: 14½ x 19

RPM	MPH	GPH	RANGE*
2000	10	2.1	186
3000	20	3.2	113
4000	35	7.6	183
WOT	41-43	—	—

0-20 MPH Acceleration: 3.7 sec.

Engine: 4.3 GL Volvo Penta, Prop: 14½ x 23

RPM	MPH	GPH	RANGE*
2200	15	3.0	190
2900	25	4.0	113
3400	35	7.9	180
WOT	48-50	—	—

0-20 MPH Acceleration: 3.2 sec.

Engine: 4.3 GXi Volvo Penta, Prop: 14½ x 19

RPM	MPH	GPH	RANGE*
2500	24	3.5	179
3500	38	8.1	122
WOT	49-52	—	—

0-20 MPH Acceleration: 2.9 sec.

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

MX 180

Ski & Fish



Specifications

LOA 18' (5.49 m.)
 Beam 91" (2.31 m.)
 Depth 43" (1.09 m.)
 Maximum Depth 53" (1.35 m.)
 Cockpit Depth 29 1/2" (.75 m.)
 Approx. Wt. 1720 lbs. (780 kg.)
 w/o Engine
 Transom Deadrise 21°

Transom Width 86" (2.18 m.)
 LOA on Trailer 22' 2" (6.76 m.)
 Fuel Capacity 29 gal. (110 L.)
 Maximum Load 1880 lbs. (853 kg.)
 Max. Persons 8 or 1225 lbs. (556 kg.)
 Max. Horsepower 150 (112 kw.)
 NMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.)
 B. Drive Unit Down 29" (.74 m.)

Standard Features

- Instrument panel includes: speedometer, tachometer, trim, fuel & trim gauges; plus switches for bilge pump, horn, navigation/anchor lights, panel lights & accessories
- Bow panel includes: aerator switch, voltmeter, tilt switch, battery charger switch, battery selector switch, trolling motor plug
- AM/FM stereo cassette w/speakers
- Electric horn
- Navigation lighting
- Telescopic 3-step boarding ladder
- Stainless steel bow eye & stern eyes
- Passenger grab handles
- Molded swim platform
- Hinged ski locker
- Glove box
- Aerated livewell
- Trolling motor mount
- Rod holders
- Tackle box trays
- Dual cable steering
- Reversible bow seats/fishing deck
- Bilge pump & blower
- 6" cleats
- Courtesy lights
- Walk-thru curved glass windshield w/open side wings
- Bow seats w/storage
- Unitized fiberglass deck/floor
- Snap-in carpet
- Suspension Aire adjustable bucket seats w/flip-up bolsters/2 removable fishing seats/aft bench seating

Options

- Sunbrella® soft top & boot w/concealed storage
- Canvas Package: bow cover, walk-thru curtain, side curtains & stern curtain
- Bimini top w/boot
- Cockpit cover
- Bow cover
- Mooring cover
- AM/FM/CD stereo
- Ski tow pylon
- Tilt steering
- Black hull & deck stripes
- Convenience Package: hour meter, depth sounder & automatic bilge pump
- Fishing Package: trolling motor, fish finder
- Full side glass windshield

Color Choices

Beige w/Black Graphics

Engine Choices

Johnson 115 PLSO
 Johnson 115 PL450
 Johnson 150 PLSO

Evinrude 115 FPLSO
 Evinrude 135 FPLSO
 Evinrude 150 FPLSO

Yamaha 115 TLRD
 Yamaha F 115 TLRD
 Yamaha 150 TLRD
 Yamaha F 150 TLRD

Mercury 115 ELPTO
 Mercury 125 ELPTO
 Mercury 135 L Optimax
 Mercury 150 L XR6
 Mercury 150 L EFI
 Mercury 150 L Optimax

Performance

Engine: 115 Johnson, Prop: 14 x 17

RPM	MPH	GPH	RANGE*
2500	15	3.6	75
3300	25	4.6	98
4700	35	7.2	88
WOT	42-44	—	—

0-20 MPH Acceleration: 3.2 sec.

Engine: 135 L Optimax Mercury (V6), Prop: 14 1/4 x 21

RPM	MPH	GPH	RANGE*
2400	15	4.2	64
3000	25	5.1	88
4000	35	7.1	89
WOT	46-49	—	—

0-20 MPH Acceleration: 3.1 sec.

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____



Specifications

LOA 18' (5.49 m.)
Beam 91" (2.31 m.)
Depth 43" (1.09 m.)
Maximum Depth 53" (1.35 m.)
Cockpit Depth 29½" (.75 m.)
Approx. Wt. 2640 lbs. (1197 kg.)
 w/4.3 GL Volvo Penta®

Transom Deadrise 21°
Transom Width 86" (2.18 m.)
LOA on Trailer 22' 4" (6.81 m.)
Fuel Capacity 29 gal. (110 L.)
Maximum Load 1200 lbs. (553 kg.)
Max. Persons 8 or 1200 lbs. (553 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.)
B. Drive Unit Down 31" (.79 m.)

Standard Features

Instrument panel includes:
 speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter &
 engine temperature gauges; plus
 switches for bilge pump, blower,
 horn, light & accessories
 Bow panel includes: aerator switch,
 voltmeter, tilt switch, battery
 charger switch, battery selector
 switch, trolling motor plug
 Electric horn
 Navigation lighting
 AM/FM stereo cassette w/2 speakers
 Glove box
 Hinged ski locker
 Ski tow ring
 6" cleats
 Walk-thru curved glass windshield
 w/open side wings
 Unitized fiberglass deck/floor

Courtesy lights
 Reversible bow seats/fishing deck
 Bow seats w/storage
 SuspensionAire adjustable bucket
 seats w/flip-up bolsters/2
 removable fishing seats/aft bench
 seating
 Passenger grab handles
 Molded swim platform
 Convertible stern sundeck/fishing
 platform
 Bilge pump & blower
 Aerated livewell
 Trolling motor mount
 Rod holders
 Tackle box trays
 Merc/Volvo prop
 Telescopic 3-step boarding ladder
 Snap-in carpet

Options

Sunbrella® soft top & boot
 w/concealed storage
 Canvas Package: bow cover, walk-thru
 curtain, side curtains & stern curtain
 Bimini top w/boot
 Cockpit cover
 Bow cover
 Tilt steering
 Full side glass windshield

Mooring cover
 AM/FM/CD stereo
 Convenience Package: hour meter,
 depth sounder & automatic bilge
 pump
 High altitude prop
 Fishing Package: trolling motor,
 fish finder
 Black hull & deck stripes

Color Choices

Beige w/Black Graphics

Engine Choices

3.0L MerCruiser (WPS) (135) 3.0 GL Volvo Penta (WPS) (135)
 4.3L MerCruiser (190) 4.3 GL Volvo Penta (190)
 4.3L MerCruiser (220) 4.3 GXi Volvo Penta (225)

Performance

Engine: 3.0L MerCruiser, Prop: 14½ x 19

RPM	MPH	GPH	RANGE*
2100	15	2.5	108
2900	25	3.5	129
3500	35	7.4	85
WOT	42-44	—	—

0-20 MPH Acceleration: 3.4 sec.

Engine: 3.0 GL Volvo Penta, Prop: 14½ x 19

RPM	MPH	GPH	RANGE*
2000	10	2.1	86
3000	20	3.2	113
4000	35	7.6	83
WOT	41-43	—	—

0-20 MPH Acceleration: 3.7 sec.

Engine: 4.3 GL Volvo Penta, Prop: 14½ x 23

RPM	MPH	GPH	RANGE*
2000	9	N/A	N/A
3000	29	N/A	N/A
4000	41	N/A	N/A
WOT	49-52	—	—

0-20 MPH Acceleration: 4.2 sec.

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____



Specifications

- LOA** 18' (5.49 m.)
- Beam** 91" (2.31 m.)
- Depth** 43" (1.09 m.)
- Maximum Depth** 53" (1.35 m.)
- Cockpit Depth** 29½" (.75 m.)
- Approx. Wt.** 1710 lbs. (776 kg.) w/o engine
- Transom Width** 86" (2.18 m.)
- Transom Deadrise** 21°
- LOA on Trailer** 22' 2" (6.76 m.)
- Fuel Capacity** 29 gal. (110 L.)
- Maximum Load** 1880 lbs. (853 kg.)
- Max. Persons** 8 or 1225 lbs. (556 kg.)
- Max. Horsepower** 150 (112 kw.)
- NMMA Certified
- Draft: A. Drive Unit Up** 16" (.41 m.)
- B. Drive Unit Down** 29" (.74 m.)

Standard Features

- Automatic bilge pump
- Instrument panel includes: speedometer, tachometer, trim, fuel and trim gauges; plus switches for bilge pump, navigation/anchor lights, panel lights, horn & accessories; hour meter & depth sounder
- Clarion Stereo CD/Sirius satellite w/4 speakers
- Glove box
- Tilt steering
- Telescopic 3-step boarding ladder
- Dual cable steering
- Unitized fiberglass deck/floor
- Snap-in carpet
- 6" cleats
- Stainless steel bow eye & stern eyes
- Walk-thru curved full glass windshield
- Bow seats w/hinged bow backrest w/storage
- Stainless steel passenger grab handles
- SuspensionAire adjustable bucket seats w/flip-up bolsters/aft bench seat
- Molded swim platform
- Hinged ski locker
- Courtesy lights
- Electric horn
- Navigation lighting
- Convenience Package: hour meter, depth sounder & automatic bilge pump

Options

- Color-coordinated Sunbrella® soft top & boot
- Color-coordinated Canvas Package: bow cover, walk-thru curtain, side curtains & stern curtain
- Color-coordinated Bimini top w/boot
- Color-coordinated cockpit cover
- Color-coordinated bow cover
- Mooring cover
- Ski tow pylon
- Stereo remote for dash

Color Choices

- Beige/Laguna Blue
- Beige/Cranberry Red
- Beige/Jet Black
- Beige/Radiant Yellow

Engine Choices

- Johnson 115 PLSO
- Johnson 115 PL4SO
- Johnson 150 PLSO
- Yamaha 115 TLRD
- Yamaha F 115 TLRD
- Yamaha 150 TLRD
- Yamaha F 150 TLRD
- Evinrude 115 FPLSO
- Evinrude 135 FPLSO
- Evinrude 150 FPLSO
- Mercury 115 ELPTO
- Mercury 125 ELPTO
- Mercury 135 L Optimax
- Mercury 150 L XR6
- Mercury 150 L EFI
- Mercury 150 L Optimax

Performance

Engine: 90 Johnson, Prop: 14 x 17

RPM	MPH	GPH	RANGE*
2500	15	2.9	93
3400	25	4.2	107
4600	35	6.3	100
WOT	38-40	—	—

0-20 MPH Acceleration: 3.3 sec.

Engine: 115 Johnson, Prop: 14 x 19

RPM	MPH	GPH	RANGE*
2500	15	3.6	75
3300	25	4.6	98
4700	35	7.2	88
WOT	42-44	—	—

0-20 MPH Acceleration: 3.2 sec.

Engine: 135 L Optimax Mercury (V6), Prop: 14¼ x 21

RPM	MPH	GPH	RANGE*
2400	15	4.2	64
3000	25	5.1	88
4000	35	7.1	89
WOT	46-49	—	—

0-20 MPH Acceleration: 3.1 sec.

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____



Specifications

LOA 18' (5.49 m.)
Beam 91" (2.31 m.)
Depth 43" (1.09 m.)
Maximum Depth 53" (1.35 m.)
Cockpit Depth 29½" (.75 m.)
Approx. Wt. 2750 lbs. (1247 kg.)
 w/4.3 GL Volvo Penta®

Transom Deadrise 21°
Transom Width 86" (2.18 m.)
LOA on Trailer 22' 4" (6.81 m.)
Fuel Capacity 29 gal. (110 L.)
Maximum Load 1200 lbs. (544 kg.)
Max. Persons 8 or 1200 lbs. (544 kg.)
 NIMA Certified

Draft: A. Drive Unit Up 16" (.41 m.)
B. Drive Unit Down 31" (.79 m.)

Standard Features

Automatic bilge pump
 Instrument panel includes:
 speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter &
 engine temperature gauges; plus
 switches for bilge pump, blower,
 horn, lights & accessories; hour
 meter & depth sounder

Electric horn
 Navigation lighting
 Clarion Stereo CD/Sirius satellite
 w/4 speakers
 Glove box
 Ski tow ring
 Hinged ski locker
 Stainless steel bow eye & stern eyes
 Unitized fiberglass deck/floor

Snap-in carpet
 Bow seats w/hinged bow backrest
 w/storage
 Walk-thru curved full glass
 windshield
 Stainless steel passenger
 grab handles
 SL Seating: SuspensionAir
 adjustable bucket seats w/flip-up
 bolsters/aft bench seat/sunlounge
 Molded swim platform
 6" cleats
 Telescopic 3-step boarding ladder
 Merc/Volvo prop
 Courtesy lights
 Tilt steering

Options

Color-coordinated Sunbrella® soft top
 & boot w/concealed storage
 Color-coordinated Canvas Package:
 bow cover, walk-thru curtain, side
 curtains & stern curtain
 Color-coordinated Bimini top w/boot

Color-coordinated cockpit cover
 Color-coordinated bow cover
 Mooring cover
 Stereo remote for dash
 High altitude prop
 Extended swim platform

Color Choices

Beige/Laguna Blue
 Beige/Cranberry Red

Beige/Jet Black
 Beige/Radiant Yellow

Engine Choices

3.0L MerCruiser (WPS) (135)
 4.3L MerCruiser (190)
 4.3L MPI MerCruiser (220)

3.0 GL Volvo Penta (WPS) (135)
 4.3 GL Volvo Penta (190)
 4.3 GXi Volvo Penta (225)

Performance

Engine: 3.0L MerCruiser, Prop: 14½ x 19

RPM	MPH	GPH	RANGE*
2100	15	2.5	108
2900	25	3.5	129
3500	35	7.4	185
WOT	42-44	—	—

0-20 MPH Acceleration: 3.4 sec.

Engine: 3.0 GL Volvo Penta, Prop: 14½ x 19

RPM	MPH	GPH	RANGE*
2000	10	2.1	186
3000	20	3.2	113
4000	35	7.6	183
WOT	41-43	—	—

0-20 MPH Acceleration: 3.7 sec.

Engine: 4.3 GL Volvo Penta, Prop: 14½ x 19

RPM	MPH	GPH	RANGE*
2200	15	3.0	190
2900	25	4.0	113
3400	35	7.9	180
WOT	48-50	—	—

0-20 MPH Acceleration: 3.2 sec.

Engine: 4.3 GXi Volvo Penta, Prop: 14½ x 19

RPM	MPH	GPH	RANGE*
2500	24	3.5	179
3500	38	8.1	122
WOT	49-52	—	—

0-20 MPH Acceleration: 2.9 sec.

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____



Specifications

LOA 19' 11" (6.07 m.)
Beam 96" (2.44 m.)
Depth 45 1/2" (1.16 m.)
Maximum Depth 56 3/4" (1.44 m.)
Cockpit Depth 32" (.81 m.)
Approx. Wt. 3045 lbs. (1381 kg.)
 w/5.0 GL Volvo Penta®

Transom Deadrise 21°
Transom Width 92" (2.34 m.)
LOA on Trailer 24' 9" (7.54 m.)
Fuel Capacity 35 gal. (132 L.)
Maximum Load 1475 lbs. (669 kg.)
Max. Persons 10 or 1475 lbs. (669 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 16 1/2" (.42 m.)
B. Drive Unit Down 31 1/2" (.80 m.)

Standard Features

Automatic bilge pump & blower
 Instrument panel includes:
 speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter &
 engine temperature gauges; plus
 switches for bilge pump, blower,
 horn, lights & accessories; hour
 meter & depth sounder

Electric horn
 Clarion Stereo CD/Sirius satellite
 w/4 speakers
 Glove box
 Hinged ski locker
 Ski tow ring
 Stainless steel bow eye & stern eyes
 6" cleats

Walk-thru curved full glass
 windshield
 Unitized fiberglass deck/floor
 Snap-in carpet
 Bow seats w/hinged bow backrest
 w/storage
 Courtesy lights
 Stainless steel passenger
 grab handles
 SL Seating: SuspensionAire
 adjustable bucket seats w/flip-up
 bolsters/aft bench seat/sunlounge
 Molded swim platform
 Merc/Volvo prop
 Tilt steering
 Telescopic 3-step boarding ladder

Options

Color-coordinated Sunbrella® soft top
 & boot w/concealed storage
 Color-coordinated Canvas Package:
 bow cover, walk-thru curtain, side
 curtains & stern curtain
 Color-coordinated Bimini top w/boot
 Color-coordinated cockpit cover
 Color-coordinated bow cover
 Mooring cover
 Extended swim platform

Captain's Call (electric) w/Corsa
 Quick & Quiet II
 Stereo remote for dash
 U-shaped cockpit seating w/filler
 cushions
 High altitude prop
 SS Upgrade Package: SS rubrail,
 docking lights, pull-up cleats,
 transom-mounted stereo remote &
 tilt/trim switch

Color Choices

Beige/Laguna Blue
 Beige/Cranberry Red

Beige/Jet Black
 Beige/Radiant Yellow

Engine Choices

4.3L MerCruiser (190)
 4.3L MPI MerCruiser (220)
 4.3L MPI Bravo III MerCruiser (220)
 5.0L MerCruiser (220)
 5.0L MPI MerCruiser (260)
 5.7L MerCruiser (250)
 5.7L Bravo III MerCruiser (250)
 350 Mag MPI Alpha MerCruiser (300)

4.3 GL Volvo Penta (190)
 4.3 GXi Volvo Penta (225)
 4.3 GXi DP Volvo Penta (225)
 5.0 GL Volvo Penta (220)
 5.0 GXi Volvo Penta (270)
 5.7 Gi Volvo Penta (280)

Performance

Engine: 4.3L MerCruiser, Prop: 14 1/4 x 21

RPM	MPH	GPH	RANGE*
2400	15	3.0	153
3200	25	4.0	191
3700	35	7.9	136
WOT	46-48	—	—

0-20 MPH Acceleration: 3.3 sec.

Engine: 4.3 GL Volvo Penta, Prop: 14 1/4 x 21

RPM	MPH	GPH	RANGE*
2000	15	2.8	164
3000	25	3.8	201
4000	35	6.9	155
WOT	45-47	—	—

0-20 MPH Acceleration: 3.4 sec.

Engine: 5.0 MPI MerCruiser, Prop: 14 1/4 x 21

RPM	MPH	GPH	RANGE*
2000	10	4.0	79
3000	29	7.5	122
4000	42	12.1	109
WOT	51-54	—	—

0-20 MPH Acceleration: 3.4 sec.

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____



Specifications

- LOA** 19' 11" (6.07 m.)
 - Beam** 96" (2.44 m.)
 - Depth** 45 3/4" (1.16 m.)
 - Maximum Depth** 56 3/4" (1.44 m.)
 - Cockpit Depth** 32" (.81 m.)
 - Approx. Wt.** 3250 lbs. (1475 kg.) w/5.0 GL Volvo Penta®
 - Transom Deadrise** 21°
 - Transom Width** 92" (2.34 m.)
 - LOA on Trailer** 24' 9" (7.54 m.)
 - Fuel Capacity** 35 gal. (132 L.)
 - Maximum Load** 1475 lbs. (669 kg.)
 - Max. Persons** 10 or 1475 lbs. (669 kg.)
 - NMMA Certified**
- Draft: A. Drive Unit Up** 16 1/2" (.42 m.)
B. Drive Unit Down 31 1/2" (.80 m.)

Standard Features

- Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter & engine temperature gauges; plus switches for bilge pump, blower, horn, lights & accessories; hour meter & depth sounder
- Electric horn
- Clarion stereo CD/Sirius satellite w/4 speakers
- Glove box
- Hinged ski locker
- Ski tow ring
- Stainless steel bow eye & stern eyes
- 6" cleats
- Courtesy lights
- Unitized fiberglass deck/floor
- Snap-in carpet
- Bow seats w/hinged bow backrest w/storage
- Walk-thru curved full glass windshield
- Automatic bilge pump & blower
- Stainless steel passenger grab handles
- Molded swim platform
- SL Seating: Suspension Aire adjustable bucket w/flip-up bolsters/aft bench seat/sunlounge
- Merc/Volvo prop
- Tilt steering
- Telescopic 3-step boarding ladder
- Automatic bilge pump
- Custom wakeboard tower

Options

- Color-coordinated cockpit cover
- Color-coordinated bow cover
- High altitude prop
- Extended swim platform
- Stereo remote for dash
- Captain's Call (electric) w/Corsa Quick & Quiet II
- U-shaped cockpit seating w/filler cushions
- SS Upgrade Package: SS rubrail, docking lights, pull-up cleats, transom-mounted stereo remote & tilt/trim switch

Color Choices

- Beige/Laguna Blue
- Beige/Cranberry Red
- Beige/Jet Black
- Beige/Radiant Yellow

Engine Choices

- 4.3L MerCruiser (190)
- 4.3L MPI MerCruiser (220)
- 4.3L MPI Bravo III MerCruiser (220)
- 5.0L MerCruiser (220)
- 5.0L MPI MerCruiser (260)
- 5.7L MerCruiser (250)
- 5.7L Bravo III MerCruiser (250)
- 350 Mag MPI Alpha MerCruiser (300)
- 4.3 GL Volvo Penta (190)
- 4.3 GXi Volvo Penta (225)
- 4.3 GXi DP Volvo Penta (225)
- 5.0 GL Volvo Penta (220)
- 5.0 GXi Volvo Penta (270)
- 5.7 Gi Volvo Penta (280)

Performance

5.0 MPI MerCruiser, Prop: 14 1/4 x 21

RPM	MPH	GPH	RANGE*
2000	10	4.0	79
3000	28	7.5	122
4000	41	12.1	109
WOT	50-53	—	—

0-20 MPH Acceleration: 3.5 sec.

5.7 Gi Volvo Penta, Prop: 14 1/4 x 21

RPM	MPH	GPH	RANGE*
2000	15	4.1	115
3000	30	7.2	131
4000	42	12.6	105
WOT	53-56	—	—

0-20 MPH Acceleration: 2.8 sec.

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 23' (7.01 m.)
Beam 102" (2.59 m.)
Depth 53" (1.35 m.)
Maximum Depth 65" (1.65 m.)
Cockpit Depth 37" (.94 m.)
Approx. Wt. 3800 lbs. (1724 kg.)
 w/5.7L MerCruiser®

Transom Deadrise 21°
Transom Width 98" (2.49 m.)
LOA on Trailer 25' 10" (7.87 m.)
Fuel Capacity 47 gal. (178 L.)
Maximum Load 1650 lbs. (748 kg.)
Max Persons 12 or 1650 lbs. (748 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 17½" (.44 m.)
B. Drive Unit Down 33" (.84 m.)

Standard Features

Instrument panel includes:
 speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, navigation/anchor lights, panel lights, interior lights and horn; hour meter and depth sounder

Courtesy lights
 Electric horn
 Navigation lighting
 Clarion Stereo CD/Sirius satellite w/4 speakers
 Glove box
 Hinged ski locker
 Ski tow ring
 6" cleats
 Snap-in carpet

Unitized fiberglass deck/floor
 Molded extended swim platform
 Walk-thru curved full glass windshield
 Bow seats w/hinged bow backrest w/storage
 Automatic bilge pump & blower
 Stainless steel telescopic 3-step boarding ladder
 Stainless steel bow eye & stern eyes
 Merc/Volvo prop
 Tilt steering
 SuspensionAire adjustable bucket seats w/flip-up bolsters; U-shaped cockpit seating w/filler cushions; table & sunlounge
 Flip-up transom walk-thru gate

Options

Color-coordinated Sunbrella® soft top & boot w/concealed storage
 Color-coordinated Canvas Package: bow cover, walk-thru curtain, side curtains & stern curtain
 Color-coordinated Bimini top w/boot
 Color-coordinated cockpit cover
 Color-coordinated bow cover
 Mooring cover
 Bow filler cushions

Stereo remote for dash
 High altitude prop
 Captain's Call (electric) w/Corsa Quick & Quiet II
 Docking lights
 SS Upgrade Package: SS rubrail, docking lights, pull-up cleats, transom-mounted stereo remote & tilt/trim switch

Color Choices

Beige/Laguna Blue
 Beige/Cranberry Red

Beige/Jet Black
 Beige/Radiant Yellow

Engine Choices

5.0L MPI MerCruiser (260)
 5.7L MerCruiser (250)
 5.7L Bravo III MerCruiser (250)
 350 Mag Bravo III MerCruiser (300)
 350 Mag MPI Bravo III MerCruiser (300)
 MX 6.2 MPI Bravo I MerCruiser (320)
 MX 6.2 MPI Bravo III MerCruiser (320)

5.0 GXi Volvo Penta (270)
 5.7 Gi Volvo Penta (280)
 5.7 Gi DP Volvo Penta (280)
 5.7 GXi Volvo Penta (315)
 5.7 GXi DP Volvo Penta (315)

Performance

Engine: 350 Magnum MPI Bravo I MerCruiser, Prop: 14 x 19 Vengeance

RPM	MPH	GPH	RANGE*
3000	28	7.3	162
4000	40	12.1	140
WOT	49-52	—	—

0-20 MPH Acceleration: N/A

Engine: 350 Magnum MPI Bravo III MerCruiser, Prop: 26 uncupped

RPM	MPH	GPH	RANGE*
2500	25	6.5	163
3500	37	10.0	157
WOT	50-53	—	—

0-20 MPH Acceleration: N/A

Engine: 5.7 Gi DP Volvo Penta, Prop: F6 Duoprop

RPM	MPH	GPH	RANGE*
2000	11	4.1	112
3000	31	7.3	178
4000	44	12.4	149
WOT	53-56	—	—

0-22 MPH Acceleration: 3.3 sec.

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 25' (7.62 m.)
Beam 102" (2.59 m.)
Depth 57½" (1.46 m.)
Maximum Depth 69½" (1.77 m.)
Cockpit Depth 37" (.94 m.)
Approx. Wt. 4600 lbs. (2087 kg.)
 w/5.7L MerCruiser®

Transom Deadrise 21°
Transom Width 98" (2.49 m.)
LOA on Trailer 26' 5" (8.05 m.)
Fuel Capacity 56 gal. (212 L.)
Maximum Load 2000 lbs. (907 kg.)
Max Persons 12 or 1800 lbs. (816 kg.)
 NMMMA Certified

Draft: A. Drive Unit Up 18½" (.47 m.)
B. Drive Unit Down 34" (.86 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, navigation/anchor lights, panel lights, interior lights and horn; hour meter and depth sounder

Courtesy lights
 Electric horn
 Navigation lighting
 Clarion Stereo CD/Sirius satellite w/4 speakers
 Hinged ski locker
 Ski tow ring
 6" cleats
 Snap-in carpet
 Unitized fiberglass deck/floor

Molded extended swim platform
 Walk-thru curved full glass windshield
 Bow seats w/hinged bow backrest w/storage
 Automatic bilge pump & blower
 Stainless steel telescopic 3-step fore & aft boarding ladders
 Stainless steel bow eye & stern eyes
 Merc/Volvo prop
 Tilt steering
 Enclosed head w/porta-pottie
 SuspensionAire adjustable bucket seats w/flip-up bolsters; U-shaped cockpit seating w/filler cushions; table & sunlounge
 Flip-up transom walk-thru gate

Options

Color-coordinated Sunbrella® soft top & boot w/concealed storage
 Color-coordinated Canvas Package: bow cover, walk-thru curtain, side curtains & stern curtain
 Color-coordinated Bimini top w/boot
 Color-coordinated cockpit cover
 Color-coordinated bow cover
 Mooring cover
 Docking lights

Stereo remote for dash
 High altitude prop
 Captain's Call (electric) w/Corsa Quick & Quiet II
 Wet bar
 Bow filler cushions
 SS Upgrade Package: SS rubrail, docking lights, pull-up cleats, transom-mounted stereo remote & tilt/trim switch

Color Choices

Beige/Laguna Blue
 Beige/Cranberry Red

Beige/Jet Black
 Beige/Radiant Yellow

Engine Choices

5.7L MerCruiser (250)
 5.7L Bravo III MerCruiser (250)
 350 Mag MPI Bravo I MerCruiser (300)
 350 Mag MPI Bravo III MerCruiser (300)
 MX 6.2 MPI Bravo I MerCruiser (320)
 MX 6.2 MPI Bravo III MerCruiser (320)
 496 Mag MPI Bravo I MerCruiser (375)
 496 Mag MPI Bravo III MerCruiser (375)

5.0 GXi Volvo Penta (270)
 5.7 Gi Volvo Penta (280)
 5.7 Gi DP Volvo Penta (280)
 5.7 GXi Volvo Penta (315)
 5.7 GXi DP Volvo Penta (315)
 8.1 Gi DP Volvo Penta (375)

Performance

Engine: 496 Mag MPI Bravo I MerCruiser, Prop: 14¼ x 21 Mirage Plus

RPM	MPH	GPH	RANGE*
2000	12	6.1	99
3000	33	10.9	152
4000	47	18.2	130
WOT	58-61	—	—

0-20 MPH Acceleration: 4.9 sec.

Engine: 496 Magnum MPI Bravo III MerCruiser, Prop: 28 uncapped

RPM	MPH	GPH	RANGE*
2000	15	6.2	123
3000	33	10.5	157
4000	47	18.0	131
WOT	57-60	—	—

0-20 MPH Acceleration: 3.4 sec.

Engine: 8.1 Gi Volvo Penta, Prop: F6 Duooprop

RPM	MPH	GPH	RANGE*
2000	20	5.7	174
3000	35	11.1	160
4000	49	19.3	128
WOT	58-61	—	—

0-20 MPH Acceleration: 3.0 sec.

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

GX 180

Ski & Fish



GLASTRON® | 2005

Specifications

LOA 18' (5.49 m.)
Beam 91" (2.31 m.)
Depth 43" (1.09 m.)
Maximum Depth 53" (1.35 m.)
Cockpit Depth 29½" (.75 m.)
Approx. Wt. 1720 lbs. (780 kg.) w/o engine
Transom Width 86" (2.18 m.)

Transom Deadrise 21°
LOA on Trailer 22' 2" (6.76 m.)
Fuel Capacity 29 gal. (110 L.)
Maximum Load 1880 lbs. (853 kg.)
Max. Persons 8 or 1225 lbs. (556 kg.)
Max. Horsepower 150 (112 kw.)
 NMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.)
B. Drive Unit Down 29" (.74 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, fuel and trim gauges; plus switches for bilge pump, horn, navigation/anchor lights, panel lights and accessories	Unitized fiberglass deck/floor Snap-in carpet Courtesy lights Reversible bow seats/fishing deck Wraparound bow seats w/hinged bow backrest w/storage
Bow panel includes: aerator switch, voltmeter, tilt switch, battery charger switch, battery selector switch, trolling motor plug	SuspensionAire adjustable bucket seats w/flip-up bolsters/2 removable fishing seats/aft bench seating
Clarion Stereo CD/Sirius satellite w/2 speakers	Stainless steel passenger grab handles
Electric horn	Molded swim platform
Navigation lighting	Telescopic 3-step boarding ladder
Hinged ski locker	Bow storage compartments
Tilt steering	Glove box
6" cleats	Aerated livewell
Stainless steel bow eye & stern eyes	Trolling motor mount
Walk-thru curved open glass windshield	Rod holders
Bilge pump	Tackle box trays
	Dual cable steering

Options

Color-coordinated Sunbrella® soft top & boot w/concealed storage	Stereo remote for dash
Color-coordinated Canvas Package: bow cover, walk-thru curtain, side curtains & stern curtain	Ski tow pylon
Color-coordinated Bimini top w/boot	Fishing Package: trolling motor, fish finder
Color-coordinated cockpit cover	Convenience Package: hour meter, depth sounder, automatic bilge pump
Color-coordinated bow cover	Full side glass windshield
Mooring cover	

Color Choices

Beige/Laguna Blue	Beige/Jet Black
Beige/Cranberry Red	Beige/Radiant Yellow

Engine Choices

Johnson 115 PLSO	Evinrude 115 FPLSO
Johnson 115 PL4SO	Evinrude 135 FPLSO
Johnson 150 PLSO	Evinrude 150 FPLSO
Yamaha 115 TLRD	Mercury 115 ELPTO
Yamaha F 115 TLRD	Mercury 125 ELPTO
Yamaha 150 TLRD	Mercury 135 L Optimax
Yamaha F 150 TLRD	Mercury 150 L XR6
	Mercury 150 L EFI
	Mercury 150 L Optimax

Performance

Engine: 115 Johnson, Prop: 14 x 17

RPM	MPH	GPH	RANGE*
2500	15	3.6	75
3300	25	4.6	98
4700	35	7.2	88
WOT	42-44	—	—

0-20 MPH Acceleration: 3.2 sec.

Engine: 135 L Optimax Mercury (V6), Prop: 14¼ x 21

RPM	MPH	GPH	RANGE*
2400	15	4.2	64
3000	25	5.1	88
4000	35	7.1	89
WOT	46-49	—	—

0-20 MPH Acceleration: 3.1 sec.

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____



Specifications

LOA 18' (5.49 m.)
Beam 91" (2.31 m.)
Depth 43" (1.09 m.)
Maximum Depth 53" (1.35 m.)
Cockpit Depth 29½" (.75 m.)
Approx. Wt. 2760 lbs. (1252 kg.)
 w/4.3 GL Volvo Penta®

Transom Deadrise 21°
Transom Width 86" (2.18 m.)
LOA on Trailer 22' 4" (6.81 m.)
Fuel Capacity 29 gal. (110 L.)
Maximum Load 1200 lbs. (544 kg.)
Max. Persons 8 or 1200 lbs. (544 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 16" (.41 m.)
 B. Drive Unit Down 31" (.79 m.)

Standard Features

Instrument panel includes:
 speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter and
 engine temperature gauges; plus
 switches for bilge pump, blower,
 horn, lights and accessories

Bow panel includes: aerator switch,
 voltmeter, tilt switch, battery
 charger switch, battery selector
 switch, trolling motor plug

Electric horn
 Navigation lighting
 Clarion Stereo CD/Sirius satellite
 w/4 speakers
 Glove box
 Hinged ski locker
 Ski tow ring
 6" cleats
 Walk-thru curved windshield
 Courtesy lights
 Unitized fiberglass deck/floor
 Reversible bow seats/fishing deck

Bow seats w/hinged bow backrest
 w/storage
 Suspension Aire adjustable bucket
 seats w/flip-up bolsters/2
 removable fishing seats/aft
 bench seating
 Bow storage compartments
 Stainless steel passenger
 grab handles
 Molded swim platform
 Tilt steering
 Convertible stern sundeck/fishing
 platform
 Bilge pump & blower
 Aerated livewell
 Trolling motor mount
 Rod holders
 Tackle box trays
 Merc/Volvo prop
 Telescopic 3-step boarding ladder
 Snap-in carpet

Options

Color-coordinated Sunbrella® soft top
 & boot w/concealed storage
 Color-coordinated Canvas Package:
 bow cover, walk-thru curtain, side
 curtains & stern curtain
 Color-coordinated Bimini top w/boot
 Color-coordinated cockpit cover
 Color-coordinated bow cover
 Mooring cover

Convenience Package: hour
 meter, depth sounder, automatic
 bilge pump
 Fishing Package: trolling motor,
 fish finder
 High altitude prop
 Extended swim platform
 Stereo remote for dash
 Full side glass windshield

Color Choices

Beige/Laguna Blue
 Beige/Cranberry Red

Beige/Jet Black
 Beige/Radiant Yellow

Engine Choices

3.0L MerCruiser (WPS) (135) 3.0 GL Volvo Penta (WPS) (135)
 4.3L MerCruiser (190) 4.3 GL Volvo Penta (190)
 4.3L MerCruiser (220) 4.3 GL Volvo Penta (225)

Performance

Engine: 3.0L MerCruiser, Prop: 14½ x 19

RPM	MPH	GPH	RANGE*
2100	15	2.5	108
2900	25	3.5	129
3500	35	7.4	85
WOT	42-44	—	—

0-20 MPH Acceleration: 3.4 sec.

Engine: 3.0 GL Volvo Penta, Prop: 14½ x 19

RPM	MPH	GPH	RANGE*
2000	10	2.1	86
3000	20	3.2	113
4000	35	7.6	83
WOT	41-43	—	—

0-20 MPH Acceleration: 3.7 sec.

Engine: 4.3 GL Volvo Penta, Prop: 14¼ x 23

RPM	MPH	GPH	RANGE*
2000	9	N/A	N/A
3000	29	N/A	N/A
4000	41	N/A	N/A
WOT	49-52	—	—

0-20 MPH Acceleration: 4.2 sec.

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____



Specifications

LOA 19' 11" (6.07 m.)
Beam 96" (2.44 m.)
Depth 45 3/4" (1.16 m.)
Maximum Depth 56 3/4" (1.44 m.)
Cockpit Depth 32" (.81 m.)
Approx. Wt. 3095 lbs. (1404 kg.)
 w/5.0 GL Volvo Penta®

Transom Deadrise 21°
Transom Width 92" (2.34 m.)
LOA on Trailer 24' 9" (7.54 m.)
Fuel Capacity 35 gal. (132 L.)
Maximum Load 1475 lbs. (669 kg.)
Max. Persons 10 or 1475 lbs. (669 kg.)
 NIMMA Certified

Draft: A. Drive Unit Up 16 1/2" (.42 m.)
B. Drive Unit Down 31 1/2" (.80 m.)

Standard Features

Instrument panel includes:
 speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter and
 engine temperature gauges; plus
 switches for bilge pump, blower,
 horn, lights and accessories

Bow panel includes: aerator switch,
 voltmeter, tilt switch, battery
 charger switch, battery selector
 switch, trolling motor plug

Electric horn
 Navigation lighting
 Clarion Stereo CD/Sirius satellite
 w/4 speakers
 Glove box
 Hinged ski locker
 Ski tow ring
 Stainless steel bow eye & stern eyes
 6" cleats
 Walk-thru curved open glass
 windshield
 Bilge pump & blower

Unitized fiberglass deck/floor
 Fiberglass floor (bow & cockpit)
 Snap-in carpet
 Reversible bow seats/fishing deck
 Bow seats w/hinged bow backrest
 w/storage
 Suspension/Aire adjustable bucket seats
 w/flip-up bolsters/2 removable
 fishing seats/aft bench seating
 Bow storage compartments
 Stainless steel passenger grab rails
 Molded swim platform
 Convertible stern sundeck/fishing
 platform
 Aerated livewell
 Trolling motor mount
 Rod holders
 Tackle box trays
 Merc/Volvo prop
 Telescopic 3-step boarding ladder
 Courtesy lights
 Tilt steering

Options

Color-coordinated Sunbrella® soft top
 & boot w/concealed storage
 Color-coordinated Canvas Package:
 bow cover, walk-thru curtain, side
 curtains & stern curtain
 Color-coordinated Bimini top w/boot
 Color-coordinated cockpit cover
 Color-coordinated bow cover
 Mooring cover

High altitude prop
 Fishing Package: trolling motor,
 fish finder
 Convenience Package: hour
 meter, depth sounder, automatic
 bilge pump
 Stereo remote for dash
 Extended swim platform
 Full side glass windshield

Color Choices

Beige/Laguna Blue
 Beige/Cranberry Red
 Beige/Jet Black
 Beige/Radiant Yellow

Engine Choices

4.3L MerCruiser (190)
 4.3L MPI MerCruiser (220)
 4.3L MPI Bravo III MerCruiser (220)
 5.0L MerCruiser (220)
 5.0L MPI MerCruiser (260)
 5.7L MerCruiser (250)
 5.7L Bravo III MerCruiser (250)
 350 Mag MPI Alpha MerCruiser (300)

4.3 GL Volvo Penta (190)
 4.3 GXi Volvo Penta (225)
 4.3 GXi DP Volvo Penta (225)
 5.0 GL Volvo Penta (220)
 5.0 GXi Volvo Penta (270)
 5.7 Gi Volvo Penta (280)

Performance

Engine: 4.3L MerCruiser, Prop: 14 1/2 x 19

RPM	MPH	GPH	RANGE*
2400	15	3.0	153
3200	25	4.0	191
3700	35	7.9	136
WOT	45-47	—	—

0-20 MPH Acceleration: 3.3 sec.

Engine: 4.3 GL Volvo Penta, Prop: 14 1/2 x 19

RPM	MPH	GPH	RANGE*
2000	15	2.8	164
3000	25	3.8	201
4000	35	6.9	155
WOT	44-46	—	—

0-20 MPH Acceleration: 3.4 sec.

Engine: 5.7L MerCruiser, Prop: 14 1/2 x 21

RPM	MPH	GPH	RANGE*
2200	15	3.3	139
2800	25	4.3	178
3500	35	8.0	134
WOT	52-54	—	—

0-20 MPH Acceleration: 3.1 sec.

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____
 Motor _____ H.P. _____
 Trailer _____
 Accessories _____
 T, T & L _____
TOTAL PRICE \$ _____

Specifications

LOA 20' 1" (6.12 m.)
Beam 102" (2.59 m.)
Depth 50½" (1.28 m.)
Maximum Depth 59" (1.50 m.)
Cockpit Depth 35" (.89 m.)
Approx. Wt. 2900 lbs. (1315 kg.)
 w/4.3L MerCruiser®

Transom Deadrise 17°
Transom Width 94" (2.39 m.)
LOA on Trailer 25' 3" (7.70 m.)
Fuel Capacity 50 gal. (189 L.)
Maximum Load 1400 lbs. (635 kg.)
Max. Persons 10 or 1400 lbs. (635 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 13" (.33 m.)
B. Drive Unit Down 28" (.71 m.)

Standard Features

Instrument panel includes:
 speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter and
 engine temperature gauges; plus
 switches for bilge pump, blower,
 horn, lights and accessories

Electric horn
 Automatic bilge pump
 Navigation lighting
 Clarion Stereo CD/Sirius satellite
 w/2 speakers
 Ski/kneeboard locker
 Ski tow ring
 Fiberglass floor
 Carry-on cooler
 Sunbrella® Bimini top w/boot
 Wrap-around bow seats
 Snap-in carpet
 Stainless steel bow eye & stern eyes

Windscreen
 Bow storage compartments
 Passenger grabrails
 Single fishing seat for aft casting
 deck
 6" cleats
 Molded swim platform
 Stainless steel boarding ladder
 Merc/Volvo prop
 Courtesy lights
 Aerated livewell
 Trolling motor plug
 SuspensionAire adjustable bucket
 seats w/flip-up bolsters
 Walk-thru transom w/gate
 Convenience Package: hour meter,
 depth sounder
 Tilt steering
 Removable padded sunlounge

Options

Cockpit cover
 High altitude prop
 Bow table w/floor mount

Forward fishing seat & pedestal
 Gelcoat hull stripe

Color Choices

White w/Blue Graphics White w/Red Graphics White w/Black Graphics

Engine Choices

4.3L MerCruiser (190) 4.3 GL Volvo Penta (190)
 4.3L MPI MerCruiser (220) 4.3 GXi Volvo Penta (225)
 5.0L MerCruiser (220) 5.0 GL Volvo Penta (220)
 5.0L MPI MerCruiser (260) 5.0 GXi Volvo Penta (270)

Performance

Engine: 4.3 GL Volvo Penta, Prop: 14¼ x 21

RPM	MPH	GPH	RANGE*
2500	21	4.8	197
3500	35	8.2	192
4500	41	14.8	125
WOT	47-50	—	—

0-20 MPH Acceleration: N/A

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 22' 6" (6.86 m.)
Beam 102" (2.59 m.)
Depth 60" (1.52 m.)
Maximum Depth 69" (1.75 m.)
Cockpit Depth 31" (.79 m.)
Approx. Wt. 4000 lbs. (1814 kg.)
 w/5.0 GL Volvo Penta®

Transom Deadrise 15°
Transom Width 94" (2.39 m.)
LOA on Trailer 30' 6" (9.30 m.)
Fuel Capacity 73 gal. (276 L.)
Maximum Load 1950 lbs. (885 kg.)
Max. Persons 13 or 1950 lbs. (885 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 18" (.46 m.)
B. Drive Unit Down 32" (.81 m.)

Standard Features

Instrument panel includes: - speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges
 Courtesy lights
 Electric horn
 Navigation lighting
 Clarion Stereo CD/Sirius satellite w/4 speakers
 Ski locker
 Ski tow ring
 6" cleats
 Automatic bilge pump & blower
 Sunbrella® Bimini top w/boot
 Removable cooler
 Walk-thru transom w/gate
 Snap-in carpet

Walk-thru curved full glass windshield
 Wraparound bow seats w/storage
 Fore & aft swim platforms w/concealed ladders
 Stainless steel bow eye & stern eyes
 Anchor locker
 Stainless steel grab handles
 Enclosed head & sink
 SuspensionAire adjustable bucket seats w/flip-up bolster
 Table w/bow & aft floor mounts
 Dockside boarding gate
 Tilt steering
 Merc/Volvo prop
 Fiberglass floor
 Convenience Package: hour meter & depth sounder

Options

Bow/cockpit cover
 Docking lights
 Pump-out head
 Compass
 High altitude prop

Bow filler cushions
 Extended swim platform
 Transom shower
 Porta-pottie
 Gelcoat hull stripe

Color Choices

White w/Blue Graphics White w/Red Graphics White w/Black Graphics

Engine Choices

5.0L MerCruiser (220) 5.0 GL Volvo Penta (220)
 5.0L MPI MerCruiser (260) 5.0 GXi Volvo Penta (270)
 5.7L MerCruiser (250) 5.7 Gi Volvo Penta (280)
 5.7L Bravo III MerCruiser (250) 5.7 Gi DP Volvo Penta (280)
 350 Mag MPI Alpha MerCruiser (300)
 350 Mag MPI Bravo III MerCruiser (300)

Performance

Engine: 5.7L MerCruiser, Prop: 14½ x 19

RPM	MPH	GPH	RANGE
2000	21	N/A	N/A
3000	30	N/A	N/A
4000	42	N/A	N/A
WOT	47-49	—	—

0-20 MPH Acceleration: 3.5 sec.

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

Sale Price

Boat \$ _____
 Motor _____ H.P. _____
 Trailer _____
 Accessories _____
 T, T & L _____
TOTAL PRICE \$ _____

Specifications

LOA 20' 2" (6.15 m.)
Beam 94½" (2.39 m.)
Depth 50" (1.27 m.)
Maximum Depth 71" (1.80 m.)
Cockpit Depth 35" (.89 m.)
Approx. Wt. 2852 lbs. (1294 kg.)
 w/5.0 GL Volvo Penta®

Transom Deadrise 21°
Transom Width 90" (2.29 m.)
LOA on Trailer 24' 8" (7.52 m.)
Fuel Capacity 45 gal. (170 L.)
Maximum Load 1450 lbs. (658 kg.)
Max. Persons 8 or 1150 lbs. (522 kg.)
 NMMA Certified

Draft: A. Drive Unit Up 18½" (.47 m.)
 B. Drive Unit Down 33" (.84 m.)

Standard Features

Instrument panel includes:
 speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter &
 engine temperature gauges; plus
 switches for bilge pump, blower,
 horn, lights & accessories

Electric horn
 Automatic bilge pump
 Blower
 Navigation lighting
 Clarion stereo CD/Sirius satellite
 w/4 speakers
 Floor storage area
 Ski tow ring
 Stainless steel bow eye & stern eyes
 6" cleats
 Tilt steering
 Sunbrella® soft top & boot
 w/concealed storage

Convenience Package: hour meter,
 depth sounder
 Cuddy cabin includes: upholstered
 V-berth, lounge seat, cabin
 courtesy light, deck hatch
 w/screen & lockable door
 BS Seating: SuspensionAire
 adjustable bucket seat w/flip-up
 bolsters/port sleeper/aft jump seats

Molded swim platform
 Helm storage locker
 Merc/Volvo prop
 Bow access step
 Bow anchor locker
 Passenger grab handles
 Walk-thru curved full glass
 windshield
 Telescopic 3-step boarding ladder
 Stainless steel bow rails

Options

Canvas Package: side curtains,
 stern curtain
 Camper Canvas Package: includes
 Canvas Package less stern curtain,
 plus aft camper top, aft camper
 side curtains & aft camper stern
 curtain
 Cockpit cover
 Mooring cover
 High altitude prop

Blue gelcoat hull stripe
 Galley Package: alcohol stove, ice
 box, sink, water system, dual helm
 seat & aft jump seats
 SL Seating: SuspensionAire
 adjustable bucket seat w/flip-up
 bolsters/aft bench seat/sunlounge
 (Galley Package not available in this
 seating option)
 Porta-pottie

Color Choices

White w/Blue Graphics

Engine Choices

4.3L MerCruiser (190)
 4.3L MPI MerCruiser (220)
 4.3L MPI Bravo III MerCruiser (220)
 5.0L MerCruiser (220)
 5.0L MPI MerCruiser (260)

4.3 GL Volvo Penta (190)
 4.3 GXi Volvo Penta (225)
 4.3 GXi DP Volvo Penta (225)
 5.0 GL Volvo Penta (220)
 5.0 GXi Volvo Penta (270)

Performance

Engine: 4.3L MerCruiser, Prop: 14¼ x 21

RPM	MPH	GPH	RANGE*
2400	15	4.2	145
3200	25	5.5	184
3700	35	8.6	165
WOT	44-46	—	—

0-20 MPH Acceleration: 3.5 sec.

Engine: 4.3 GL Volvo Penta, Prop: 14¼ x 21

RPM	MPH	GPH	RANGE*
2000	15	4.0	152
3000	25	5.3	191
4000	35	9.0	158
WOT	43-45	—	—

0-20 MPH Acceleration: 3.6 sec.

Note: All testing done with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.

*Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____
 Motor _____ H.P. _____
 Trailer _____
 Accessories _____
 T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 21' 6" (6.55 m.)
Beam 102" (2.59 m.)
Depth 62" (1.57 m.)
Maximum Depth 72" (1.83 m.)
Cockpit Depth 34" (.86 m.)
Approx. Wt. 3600 lbs. (1633 kg.)
 w/5.0 GXi Volvo Penta®

Transom Deadrise 21°
Transom Width 96" (2.44 m.)
LOA on Trailer 26' 4" (8.03 m.)
Fuel Capacity 56 gal. (212 L.)
Maximum Load 1950 lbs. (885 kg.)
Max. Persons 10 or 1475 lbs. (669 kg.)
NMMA Certified

Draft: A. Drive Unit Up 18" (.46 m.)
 B. Drive Unit Down 36" (.91 m.)

Standard Features

Instrument panel includes:
 speedometer, tachometer, trim,
 fuel, oil pressure, voltmeter &
 engine temperature gauges; plus
 switches for bilge pump, blower,
 lights & horn; hour meter & depth
 sounder
 Horn
 Porta-pottie
 Blower
 Navigation lighting
 Hour meter
 Clarion stereo CD/Sirius satellite
 w/4 speakers
 Stainless steel bow rails
 Stainless steel bow eye & stern eyes
 6" cleats
 Ski tow ring
 Cuddy cabin includes: upholstered
 V-berth, cabin courtesy light, deck
 hatch & bi-fold lockable door

BS Seating: SuspensionAire
 adjustable bucket seat w/flip-up
 bolsters/port sleeper/aft jump seats
 Molded swim platform
 Stainless steel telescopic 3-step
 boarding ladder
 Sunbrella® Bimini top & boot
 Merc/Volvo prop
 Tilt steering
 Floor storage area
 Walk-thru curved full glass
 windshield
 Carry-on ice chest
 Bow anchor locker
 12V power plug
 Stereo remote for dash
 Snap-in carpet
 Fiberglass floor
 Battery switch
 Automatic bilge pump

Options

Galley Package: stainless steel sink,
 5-gal. water system, butane stove
 Camper Canvas Package: includes
 Canvas Package less stern curtain,
 plus aft camper top & aft camper
 side curtains & aft camper stern
 curtain
 Canvas Package for Bimini top: side
 curtains, aft curtain & clear
 connector
 Cockpit cover

Mooring cover
 Spot light
 High altitude prop
 Compass
 Blue gelcoat hull stripe
 SL Seating: SuspensionAire
 adjustable bucket seats w/flip-up
 bolsters/aft bench seat/sunlounge
 (Galley Package not available in this
 seating option)

Color Choices

White w/Blue Graphics

Engine Choices

4.3L MerCruiser (190) 4.3 GL Volvo Penta (190)
 5.0L MerCruiser (220) 5.0 GL Volvo Penta (220)
 5.0L MPI MerCruiser (260) 5.0 GXi Volvo Penta (270)
 5.7L MerCruiser (250) 5.7 Gi Volvo Penta (280)
 5.7L Bravo III MerCruiser (250) 5.7 Gi DP Volvo Penta (280)
 350 Mag MPI Alpha MerCruiser (300)
 350 Mag MPI Bravo I MerCruiser (300)

Performance

Engine: 5.0 GXi Volvo Penta, Prop: 14½ x 19

RPM	MPH	GPH	RANGE
2000	9	3.9	116
3000	29	7.3	200
4000	38	11.4	168
WOT	48-51	—	—

0-20 MPH Acceleration: 3.9 sec.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 24' 10" (7.57 m.)
Beam 102" (2.59 m.)
Depth 80½" (2.04 m.)
Maximum Depth 91" (2.31 m.)
Cockpit Depth 36" (.91 m.)
Approx. Wt. 4437 lbs. (2013 kg.)
 w/5.0 GL Volvo Penta®

Transom Deadrise 20°
Transom Width 97" (2.46 m.)
LOA on Trailer 26' 10" (8.18 m.)
Fuel Capacity 56 gal. (212 L.)
Maximum Load 2240 lbs. (1016 kg.)
Max. Persons 10 or 1475 lbs. (669 kg.)
 NMEA Certified

Draft: A. Drive Unit Up 17" (.43 m.)
 B. Drive Unit Down 35" (.89 m.)

Standard Features

Instrument panel includes: speedometer, tachometer, trim, fuel, oil pressure, voltmeter and engine temperature gauges; plus switches for bilge pump, blower, navigation/anchor lights, panel lights, interior lights and horn; hour meter and depth sounder

Horn/blower/compass
 Automatic bilge pump
 Translucent deck hatch w/screen
 Clarion Stereo CD/Sirius satellite w/4 speakers
 Bow pulpit w/roller & bow rope locker
 Stainless steel rails
 Stainless steel bow eye & stern eyes
 Stainless steel cleats
 Main cabin includes: enclosed head with 4-gallon porta-pottie, fiberglass shower stall, hanging clothes locker, cabin table, cabin courtesy lights, ice box, alcohol stove & on-demand water faucet

Molded swim platform/stainless steel telescopic 3-step boarding ladder
 Cockpit area includes:
 Suspension Aire adjustable bucket seat w/flip-up bolster, L-shaped passenger seating w/double-wide fold-out sunlounge, stern storage compartment & walk-thru transom w/gate
 Walk-thru curved full glass windshield
 Walkaround deck
 Dual battery switch
 Fiberglass floor
 18-gallon water tank
 Sunbrella® Bimini top & boot
 Merc/Volvo prop
 Vented cabin windows (2)
 Tilt steering
 Transom shower
 Ski tow ring
 Remote control spotlight
 Snap-in carpet

Options

Camper Canvas Package includes: Canvas Package less stern curtain, plus aft camper top, aft camper side curtains, aft camper stern curtains
 Canvas Package for Bimini top: side curtains, aft curtain, clear connector
 Cockpit cover
 Electric anchor windlass
 Manual china head w/pump-out

Hydraulic trim tabs
 Starboard windshield wiper
 High altitude prop
 Dockside air conditioner/reverse heat
 Galley Package: microwave oven, 12/110V refrigerator, alcohol/electric stove, hot water heater, 110V dockside power
 Electric china head
 13" flat screen TV w/DVD
 Blue gelcoat hull stripe

Color Choices

White w/Blue Graphics

Engine Choices

5.0L MerCruiser (220)
 5.0L MPI MerCruiser (260)
 5.7L MerCruiser (250)
 5.7L Bravo III MerCruiser (250)
 350 Mag MPI Bravo I MerCruiser (300)
 350 Mag MPI Bravo III MerCruiser (300)
 MX 6.2 MPI Bravo I MerCruiser (320)
 MX 6.2 MPI Bravo III MerCruiser (320)

5.0 GL Volvo Penta (220)
 5.0 GXi Volvo Penta (270)
 5.0 OSi DP Volvo Penta (270)
 5.7 Gi Volvo Penta (280)
 5.7 Gi DP Volvo Penta (280)
 5.7 OSi DP Volvo Penta (280)
 5.7 GXi Volvo Penta (315)
 5.7 GXi DP Volvo Penta (315)
 5.7 OSXi DP Volvo Penta (320)

Performance

Engine: 5.0 GL Volvo Penta, Prop: 15 x 17

RPM	MPH	GPH	RANGE*
2500	15	7.4	102
3400	25	10.7	118
4600	35	13.2	134
WOT	38-41	—	—

0-20 MPH Acceleration: 3.9 sec.

Engine: 350 Magnum MPI Alpha MerCruiser, Prop: 14¼ x 21 Mirage Plus

RPM	MPH	GPH	RANGE*
2500	15	10.5	72
3300	25	13.5	93
4200	35	18.5	95
WOT	46-49	—	—

0-20 MPH Acceleration: 3.5 sec.

Note: All with two persons and full tank of fuel. Performance results will vary depending on load, altitude, and other conditions.
 *Range: Mileage range calculated on designated RPM and MPH figures shown above, and based on 90 percent of boat's fuel capacity.

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

Specifications

LOA 26' 11" (8.20 m.)
Beam 102" (2.59 m.)
Depth 86" (2.18 m.)
Maximum Depth 92" (2.34 m.)
Cockpit Depth 36" (.91 m.)
Approx. Wt. 5850 lbs. (2654 kg.)
 w/5.7 Gi Volvo Penta®
Transom Deadrise 20°

Transom Width 97" (2.46 m.)
LOA on Trailer 30' (9.14 m.)
Fuel Capacity 72 gal. (273 L.)
Bridge Clearance 79" (2.01 m.)
Bridge Clearance w/Arch
 106" (2.69 m.)
 NIMA Certified

Draft: A. Drive Unit Up 19" (.49 m.)
B. Drive Unit Down 40" (1.02 m.)

Standard Features

Instrument panel Includes:
 speedometer, tachometer, trim, fuel, oil pressure, voltmeter, engine temperature, hour meter & depth sounder gauges; plus switches for bilge pump, blower, navigation/anchor lights, panel lights, interior lights & horn

Electric horn
Compass
Blower
Depth sounder & hour meter
Automatic bilge pump
Stainless steel bow eye & stern eyes
Stainless steel cleats
Stainless steel bow rails & grabrails
Dual battery switch
Fiberglass cockpit floor
Walk-thru curved full glass windshield
Remote control spotlight
Main cabin includes: locker, V-berth cushions w/table & filler cushions, cabin courtesy lights & hot water system
Deck hatch w/screen

Cockpit area includes: wet bar w/sink, ice box & water system, removable stern seat, portside lounge seat, double wide sunlounge helm seat

Galley Package: microwave oven, 12/110V refrigerator, alcohol/electric stove, 110V dockside power, sink & water system

18-gallon water tank
Snap-in carpet
Molded swim platform w/stainless steel telescopic 3-step boarding ladder
Sunbrella® Bimini top & boot
Merc/Volvo prop
Tilt steering
Clarion stereo CD/Sirius satellite
SeaKey satellite communications system
Manual china head w/pump-out
Transom shower
Battery charger
Ski tow ring
Hydraulic trim tabs
Vented cabin windows (4)

Options

Canvas Package for Bimini top: side curtains, aft curtain, clear connector

Cockpit cover
13" flat screen TV w/DVD
Stereo remote
Fore deck sun pad
High altitude prop

Electric anchor windlass
Starboard windshield wiper
Blue gelcoat hull stripe
Radar arch
Grey water system
Electric china head
Dockside air conditioner/reverse heat
Westerbeke 5KW generator

Color Choices

White w/Blue Graphics

Engine Choices

5.7L MerCruiser (250)
 5.7L Bravo III MerCruiser (250)
 350 Mag MPI Bravo I MerCruiser (300)
 350 Mag MPI Bravo III MerCruiser (300)
 MX 6.2 MPI Bravo I MerCruiser (320)
 MX 6.2 MPI Bravo III MerCruiser (320)

5.0 GXi Volvo Penta (270)
 5.0 GXi DP Volvo Penta (270)
 5.0 OSi DP Volvo Penta (270)
 5.7 Gi Volvo Penta (280)
 5.7 Gi DP Volvo Penta (280)
 5.7 OSi DP Volvo Penta (280)
 5.7 GXi Volvo Penta (315)
 5.7 GXi DP Volvo Penta (315)
 5.7 OSXi DP Volvo Penta (320)

Performance

Engine: 5.7 GXI DP Volvo Penta, Prop: F4 Duoprop

RPM	MPH	GPH	RANGE
2000	9	4.5	130
3000	23	8.0	187
4000	35	13.3	172
WOT	45-48	—	—

0-20 MPH Acceleration: 4.0 sec.

U.S. models of the GS 269 come equipped with a SeaKey™ satellite communications system which includes:

- Emergency messaging
- Position monitoring via the Internet
- Water intrusion monitoring
- Low voltage monitoring
- Anti-theft protection
- 24-hour telephone assistance

Sale Price

Boat \$ _____

Motor _____ H.P. _____

Trailer _____

Accessories _____

T, T & L _____

TOTAL PRICE \$ _____

MerCruiser Sterndrive Engine Information

The following pages contain data about sterndrives offered in our 2004 product.

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

3.0L MERCUISER

135 hp/101 kw.
4
181
9.3:1
4400-4800
2.0:1
Power
Power
34"
23"
20" (above crankshaft at CL)
635 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

4.3L MERCUISER

190 hp/142 kw.
6
262
9.4:1
4400-4800
1.81:1
Power
Power
33"
32"
21" (above crankshaft at CL)
848 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

4.3L MPI MERCUISER

220 hp/164 kw.
6
262
9.4:1
4400-4800
1.62:1
Power
Power
33"
32"
21" (above crankshaft at CL)
865 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

4.3L MPI BRAVO III MERCUISER

220 hp/164 kw.
6
262
9.4:1
4400-4800
2.2:1
Power
Power
33"
32"
21" (above crankshaft at CL)
921 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.0L MERCUISER

220 hp/164 kw.
8
305
9.4:1
4400-4800
1.62:1
Power
Power
37"
29"
22" (above crankshaft at CL)
946 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.0L MPI MERCUISER

260 hp/194 kw.
8
305
9.4:1
4600-5000
1.62:1
Power
Power
37"
29"
22" (above crankshaft CL)
952 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.7L MERCUISER

250 hp/186 kw.
8
350
9.4:1
4400-4800
1.47:1
Power
Power
37"
29"
22" (above crankshaft at CL)
946 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.7L BRAVO III MERCUISER

250 hp/185 kw.
8
350
9.4:1
4400-4800
2.2:1
Power
Power
37"
29"
22" (above crankshaft at CL)
1013 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

350 MAGNUM MPI ALPHA MERCUISER

300 hp/224 kw.
8
350
9.4:1
4600-5000
1.47:1
Power
Power
37"
29"
22" (above crankshaft at CL)
952 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

350 MAGNUM MPI BRAVO I MERCUISER

300 hp/224 kw.
8
350
9.4:1
4600-5000
1.5:1
Power
Power
37"
29"
22" (above crankshaft at CL)
993 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

350 MAGNUM MPI BRAVO III MERCUISER

300 hp/224 kw.
8
350
9.4:1
4600-5000
2.0:1
Power
Power
37"
29"
22" (above crankshaft at CL)
1019 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MX 6.2 MPI BRAVO I MERCUISER

320 hp/239 kw.
8
377
9.0:1
4800-5200
1.65:1
Power
Power
37"
29"
22" (above crankshaft at CL)
993 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MX 6.2 MPI BRAVO III MERCUISER

320 hp/239 kw.
8
377
9.0:1
4800-5200
2.2:1
Power
Power
37"
29"
22" (above crankshaft at CL)
1019 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

496 MAGNUM MPI BRAVO I MERCUISER

375 hp/280 kw.
8
496
9.1:1
4400-4800
1.5:1
Power
Power
35"
33"
24" (above crankshaft at CL)
1199 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

496 MAGNUM MPI BRAVO III MERCUISER

375 hp/280 kw.
8
496
9.1:1
4400-4800
2.0:1
Power
Power
35"
33"
24" (above crankshaft at CL)
1225 lbs. (pkg. weight)

Volvo Penta Sterndrive Engine Information

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

3.0 GL VOLVO PENTA

135 hp/100 kw.
4
181
9.2:1
4600
1.97:1
Power
Power
33 3/4"
26 1/4"
19" (above crankshaft at CL)
670 lbs. (pkg. weight)

4.3 GL VOLVO PENTA

190 hp/141 kw.
6
262
9.4:1
4600
1.79:1
Power
Power
32 1/2"
31"
20 1/2" (above crankshaft at CL)
885 lbs. (pkg. weight)

4.3 GXI VOLVO PENTA

225 hp/168 kw.
6
263
9.4:1
4800
1.60:1
Power
Power
32 1/2"
31"
22" (above crankshaft at CL)
907 lbs. (pkg. weight)

4.3 GXI DP VOLVO PENTA

225 hp/167 kw.
6
262
9.4:1
4800
1.95:1
Power
Power
32 1/2"
31"
21" (above crankshaft at CL)
916 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.0 GL VOLVO PENTA

220 hp/164 kw.
8
305
9.4:1
4800
1.60:1
Power
Power
37"
28 1/2"
22" (above crankshaft at CL)
984 lbs. (pkg. weight)

5.0 GXI VOLVO PENTA

270 hp/201 kw.
8
305
9.4:1
5000
1.60:1
Power
Power
37"
28 1/2"
22" (above crankshaft at CL)
1031 lbs. (pkg. weight)

5.7 GI VOLVO PENTA

280 hp/209 kw.
8
350
9.4:1
5000
1.51:1
Power
Power
37"
28 1/2"
22" (above crankshaft at CL)
1031 lbs. (pkg. weight)

5.7 GI DP VOLVO PENTA

280 hp/209 kw.
8
350
9.4:1
5000
1.95:1
Power
Power
37"
28 1/2"
22" (above crankshaft at CL)
1040 lbs. (pkg. weight)

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

MODEL:

Horsepower at Prop Shaft
Cylinders
Cubic Inches
Compression Ratio
Max. Recommended RPM
Lower Unit Gear Ratio
Tilt
Trim
Length
Width
Height
Weight

5.7 GXi VOLVO PENTA

320 hp/239 kw.
8
350
9.4:1
5000
1.95:1
Power
Power
37"
28 1/4"
22" (above crankshaft at CL)
1031 lbs. (pkg. weight)

5.7 GXi DP VOLVO PENTA

320 hp/239 kw.
8
350
9.4:1
5000
1.95:1
Power
Power
37"
28 1/4"
22" (above crankshaft at CL)
1040 lbs. (pkg. weight)

8.1 Gi DP VOLVOPENTA

375 hp/280 kw.
8
496
9.1:1
4600
1.68:1
Power
Power
40.4"
32.8"
21.8" (above crankshaft at CL)
1258 lbs. (pkg. weight)

GLASTRON®

A GENMAR COMPANY

P.O. Box 460
Little Falls, Minnesota 56345, USA
Phone 320/632-8395
www.glastron.com

©2004 Glastron Boats